

NACOmatic

Effective: 17-December-2009

Expires: 14-January-2010

Your Ad Here

~80,000 Page views/month

Contact:

Doug Ranz

248-318-0011

NACOmatic@hotmail.com

Warranty

I make absolutely no warranty nor guarantee whatsoever about the accuracy, availability, applicability and/or correctness of any of the information in this document.

The official, original NACO documents are available for your downloading pleasure from: <http://naco.faa.gov/index.asp?xml=naco/onlineproducts>

Copyright

This compilation is protected by US copyright laws and international copyright treaties.

Limitations

The sale, hosting and/or distribution of this document in any and all forms, is prohibited.

Release from Liability

All users of this compilation must agree to be legally bound hereby, that Douglas R. Ranz ("Released Party") SHALL NOT BE LIABLE FOR MY DEATH OR INJURY TO MY PERSON, OR FOR ANY LOSS OR DAMAGE TO MY PROPERTY OR REPUTATION caused in any manner whatsoever, whether attributable to the negligence of the Released Party, or for any other reason, occurring during the time that I am operating an aircraft.

I do hereby waive any right of action against the Released Party from any and all causes or claims that I may have against them from the beginning of time. I further agree not to sue on any such cause or claim. This agreement shall not release liability for gross negligence or willful misconduct of the Released Party. I agree to indemnify and hold the Released Party harmless for any losses, judgments, damages or fees he may incur, including but not limited to attorneys fees, arising out any lawsuit related to the planning, flight and/or enforcement of or legal challenge to this agreement. It is my intention that this agreement be interpreted and enforced to the maximum extent allowed by Michigan law.

UT Min	Alt#4	-	4
UT Min	TO#4	-	7
	36U	-	38
	69V	-	40
	74V	-	93
	BDG	-	20
	BMC	-	21
	CDC	-	23
	CNY	-	61
	DPG	-	31
	DTA	-	26
	ENV	-	166
	HIF	-	63
	KNB	-	42
	LGU	-	56
	MLF	-	60
	OGD	-	75
	PUC	-	81
	PVU	-	85
	RIF	-	90
	SGU	-	154
	SLC	-	95
	TVY	-	160
	U42	-	151
	U52	-	19
	U69	-	30
	VEL	-	164

INSTRUMENT APPROACH PROCEDURE CHARTS

A IFR ALTERNATE AIRPORT MINIMUMS

Standard alternate minimums for non precision approaches are 800-2 (NDB, VOR, LOC, TACAN, LDA, VORTAC, VOR/DME, ASR or WAAS LNAV); for precision approaches 600-2 (ILS or PAR). Airports within this geographical area that require alternate minimums other than standard or alternate minimums with restrictions are listed below. NA - means alternate minimums are not authorized due to unmonitored facility or absence of weather reporting service. Civil pilots see FAR 91. IFR Alternate Airport Minimums: Ceiling and Visibility Minimums not applicable to USA/USN/USAF. Pilots must review the IFR Alternate Airport Minimums Notes for alternate airfield suitability.

NAME ALTERNATE MINIMUMS

BULLHEAD CITY, AZ

LAUGHLIN/BULLHEAD

INTL **RNAV (GPS) Rwy 16¹²**
RNAV (GPS) Rwy 34³⁴
VOR/DME Rwy 34¹⁵

¹NA when local weather not available.

²Categories A, B, 1200-2; Categories C, D, 1200-3.

³NA when control tower closed.

⁴Categories A, B, 1100-2; Categories C, D, 1100-3.

⁵Categories A, B, 2200-2; Categories C, D, 2200-3.

CARSON CITY, NV

CARSON **RNAV (GPS)-A**
 Categories A, B, 1700-2; Category C, 1700-3;
 Category D, 1800-3.

NA when local weather not available.

CEDAR CITY, UT

CEDAR CITY RGNL **ILS Rwy 20**
VOR Rwy 20

Category D, 900-2¼.

DOUGLAS BISBEE, AZ

BISBEE DOUGLAS

INTL **VOR/DME or GPS Rwy 17**
VOR Rwy 17

NA when control zone not in effect.

ELKO, NV

ELKO RGNL **LDA/DME RWY 23¹**
RNAV (GPS) Rwy 23²
VOR-A³
VOR/DME-B⁴

¹Categories A,B, 900-2; Category C 1000-3;
 Category D, 1100-3.

²Categories A,B, 1400-2; Categories C,D, 1400-3.

³Categories A,B, 1500-2; Categories C,D, 1500-3.

⁴Categories A,B, 1200-2; Categories C,D, 1200-3.

NAME ALTERNATE MINIMUMS

FLAGSTAFF, AZ

FLAGSTAFF

PULLIAM **ILS or LOC/DME Rwy 21¹²**
VOR or GPS-A³

¹NA when control tower closed.

²ILS, Categories B,C,D, 700-2.

³Category D, 800-2¼.

FORT HUACHUCA-SIERRA VISTA, AZ

SIERRA VISTA MUNI-

LIBBY AAF **ILS or LOC Rwy 26**
NDB Rwy 26
RNAV (GPS) Rwy 8¹
VOR Rwy 26

NA when control tower closed.

¹Categories A, B, 1300-2; Categories C, D, 1300-3.

GLENDALE, AZ

GLENDALE MUNI **RNAV (GPS) Rwy 1**
 NA when local weather not available.

GRAND CANYON, AZ

GRAND CANYON NATIONAL
 PARK **ILS or LOC/DME Rwy 3**
 NA when control tower closed.
 Category D, 700-2.

VALLE **VOR/DME Rwy 19**

NA except for operators with approved weather reporting service.

KANAB, UT

KANAB MUNI **RNAV (GPS) Rwy 1**
 Category B, 1100-2; Category C, 1400-3.

KINGMAN, AZ

KINGMAN **RNAV (GPS) Rwy 3**
RNAV (GPS) Y Rwy 21
VOR/DME Rwy 21

Category D, 800-2¼.

ALTERNATE MINS



NAME ALTERNATE MINIMUMS
LAKE HAVASU CITY, AZ
 LAKE HAVASU CITY **VOR/DME or GPS-A**
 Categories A,B, 1000-2; Categories C,
 1000-2½; Category D, 1000-3.

LAS VEGAS, NV
 HENDERSON EXECUTIVE **RNAV (GPS)-B¹**
VOR-C²
 NA when local weather not available.
 ¹Categories A,B, 1000-2; Category C,
 1000-2½.
 ²Categories A, B, 2400-2; Category C, 2400-3.

MC CARRAN INTL **ILS or LOC Rwy 25L¹**
ILS or LOC Rwy 25R¹
ILS or LOC/DME Rwy 1L²
RNAV (GPS) Rwy 1R³
RNAV (GPS) Rwy 19L⁴⁵
RNAV (GPS) Rwy 19R⁴⁵
VOR/DME-A²
VOR Rwy 25L/R³

¹ILS, LOC, Categories A,B, 900-2; Category C,
 900-2½, Category D, 900-2¾, Category E,
 1400-3.
 ²ILS, LOC, Categories A,B, 900-2; Category C,
 900-2½.
 ³Categories A,B, 900-2; Category C, 900-2½,
 Category D, 900-2¾.
 ⁴Categories A,B, 900-2; Category C, 900-2¾;
 Category D, 900-3.
 ⁵NA when local weather not available.

NORTH LAS VEGAS **ILS or LOC Rwy 12L**
 NA when control tower closed.

LOVELOCK, NV
 DERBY FIELD **VOR or GPS-C¹**
VOR/DME or GPS-A²
 ¹Categories A,B, 1900-2; Categories C,D,
 1900-3.
 ²Categories A,B, 900-2; Category C, 900-2¾;
 Category D, 900-3.

MILFORD, UT
 MILFORD MUNI/BEN AND JUDY
 BRISCOE FIELD **VOR or GPS-A**
 Category D, 800-2½.

OGDEN, UT
 OGDEN-HINCKLEY **ILS Or LOC Rwy 3¹²**
RNAV (GPS) Y Rwy 3
RNAV (GPS) Z Rwy 3
 NA when local weather not available.
 ¹ILS, Category D, 700-2.
 ²NA when control tower closed.

NAME ALTERNATE MINIMUMS
PHOENIX, AZ
 PHOENIX DEER VALLEY **RNAV (GPS)-B¹²**
RNAV (GPS)-C³
RNAV (GPS) Rwy 7R⁴
RNAV (GPS) Rwy 25L¹⁴

¹NA when local weather not available.
 ²Categories A,B, 1000-2; Category C,
 1000-2¾.
 ³Categories A,B, 1000-2; Category C,
 1000-2¾; Category D, 1100-3.
 ⁴Categories A,B, 1000-2; Category C,
 1000-2¾; Category D, 1000-3.

PHOENIX-
 MESAGATEWAY **ILS or LOC Rwy 30C¹²**
RNAV (GPS) Rwy 30C¹
RNAV (GPS) Rwy 30L³
VOR or TACAN Rwy 30C¹

¹NA when local weather not available.
 ²NA when control tower closed.
 ³Category E, 800-2½.

PHOENIX
 SKY HARBOR INTL **ILS or LOC Rwy 7R¹**
ILS or LOC Rwy 7L²
ILS or LOC Rwy 8³
ILS or LOC Rwy 25L²
ILS or LOC Rwy 26²
RNAV (GPS) Y Rwy 7R²
RNAV (GPS) Y Rwy 7L²
RNAV (GPS) Y Rwy 8⁴
RNAV (GPS) Y Rwy 25L²
RNAV (GPS) Y Rwy 25R²
RNAV (GPS) Y Rwy 26²

¹ILS, Categories A,B,C, 700-2; Category D,
 800-2½. LOC, Category D, 800-2½.
 ²Category D, 800-2½.
 ³ILS, Categories A,B, 800-2; Category C, 800-
 2½; Category D, 800-2½. LOC, Category C,
 800-2½; Category D, 800-2½.
 ⁴Category C, 800-2½; Category D, 800-2½.

PRESCOTT, AZ
 ERNEST A. LOVE FIELD .. **ILS/DME Rwy 21L¹²**
RNAV (GPS) Rwy 21L⁴
VOR Rwy 12³

¹NA when control tower closed.
 ²ILS, Category C, 700-2; Category D, 900-3.
 LOC, Category D, 900-3.
 ³Category D, 900-3.
 ⁴Category D, 1000-3.

NAME **ALTERNATE MINIMUMS**
PRICE, UT
CARBON COUNTY RGNL/
BUCK DAVIS FIELD **VOR/DME Rwy 36**
VOR Rwy 36¹

Category C, 900-2½; Category D, 1100-3.
¹Categories A, B, 2000-2; Categories C, D, 2000-3.

PROVO, UT

PROVO MUNI .. **ILS or LOC/DME Rwy 13**, 700-2
Na when control tower closed.

RENO, NV

RENO/TAHOE INTL **ILS Rwy 16R**, 2100-71
ILS or LOC/DME Rwy 34L²
LOC Rwy 16R³
LOC/DME BC Rwy 34L⁴
RNAV (GPS) X Rwy 34L⁵
RNAV (GPS) X Rwy 34R⁵
RNAV (GPS) Y Rwy 16L⁶
RNAV (GPS) Y Rwy 16R⁷
RNAV (GPS) Y Rwy 34L⁴
RNAV (GPS) Y Rwy 34R⁸
RNAV (RNP) Z Rwy 16R, 800-2½
VOR-D, 1600-3

¹LOC, NA.

²ILS, LOC, Categories A, B, 1000-2; Category C, 1000-2½.

³Categories A, B, 1600-2; Categories C, D, 1600-3; Category E, 2400-3.

⁴Categories A, B, 1000-2; Categories C, D, 1000-3.

⁵Categories A, B, 1000-2; Category C, 1000-2½; Category D, 1000-3.

⁶Categories A, B, 1400-2; Categories C, D, 1400-3.

⁷Categories A, B, 1800-2; Categories C, D, 1800-3.

⁸Categories A, B, 1000-2; Category C, 1000-2½.

ST. GEORGE, UT

ST. GEORGE MUNI **RNAV (GPS) Rwy 34¹**
VOR or GPS-B, 1300-22
VOR-C, 1800-32
VOR/DME Rwy 34²³

¹Categories A, B 1100-2½; Categories C, D, 1100-3.

²NA except for operators with approved weather reporting service.

³Category C, 800-2½; Category D, 1000-3.

ST. JOHNS, AZ

ST. JOHNS
INDUSTRIAL AIRPARK **RNAV (GPS) Rwy 14**
RNAV (GPS) Rwy 32
VOR/DME-A

NA when local weather not available.

NAME **ALTERNATE MINIMUMS**
SCOTTSDALE, AZ
SCOTTSDALE **RNAV (GPS)-D¹**
RNAV (GPS)-E¹
VOR or GPS-A²³
VOR or GPS-C²⁴

¹NA when local weather not available.

²NA when Scottsdale altimeter not available.

³Categories A, B, C, 1100-3.

⁴Categories A, B, 900-2½; Category C, 900-2½.

TONOPAH, NV

TONOPAH **VOR or GPS-A**
Category D, 800-2½.

TOOELE, UT

BOLINDER FIELD-
TOOELE VALLEY **ILS or LOC/DME Rwy 17¹**
RNAV (GPS) Rwy 17

NA when local weather not available.

¹ILS, Category D, 700-2.

TUCSON, AZ

TUCSON INTL **ILS or LOC Rwy 11L¹**
LOC/DME BC Rwy 29R²
RNAV (GPS) Z Rwy 11L²
RNAV (GPS) Rwy 29R²
RNAV (GPS) Rwy 3³
RNAV (GPS) Rwy 29L⁴
RNAV (GPS) Z Rwy 29R²
VOR or TACAN Rwy 11L²
VOR/DME or TACAN Rwy 29R²

¹ILS, LOC, Categories A, B, 900-2; Category C, 900-2½; Category D, 900-3; Category E, 1100-3.

²Category E, 1100-3.

³Categories A, B, C, D, 800-2½.

⁴Category D, 800-2½.

WENDOVER, UT

WENDOVER **VOR/DME-B¹**
VOR/DME or TACAN Rwy 26²
¹Categories A, B, 1700-2; Categories C, D, E, 1700-3.
²Category E, 800-2½.

WINNEMUCCA, NV

WINNEMUCCA MUNI **RNAV (GPS) Rwy 14¹²**
RNAV (GPS) Rwy 32¹
VOR/DME Rwy 14³

¹NA when local weather not available.

²Category C, 800-2½; Category D, 800-2½.

³Category D, 1300-3.

WINDOW ROCK, AZ

WINDOW ROCK **VOR/DME-A**
Categories A, B, 1100-2; Categories C, D, 1100-3.

INSTRUMENT APPROACH PROCEDURE CHARTS

IFR TAKE-OFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

Civil Airports and Selected Military Airports

ALL USERS: Airports that have Departure Procedures (DPs) designed specifically to assist pilots in avoiding obstacles during the climb to the minimum enroute altitude, and/or airports that have civil IFR take-off minimums other than standard, are listed below. Take-off Minimums and Departure Procedures apply to all runways unless otherwise specified. Altitudes, unless otherwise indicated, are minimum altitudes in MSL.

DPs specifically designed for obstacle avoidance are referred to as Obstacle Departure Procedures (ODPs) and are described below in text, or published separately as a graphic procedure. If the (Obstacle) DP is published as a graphic procedure, its name will be listed below, and it can be found in either this volume (civil), or a separate Departure Procedure volume (military), as appropriate. Users will recognize graphic obstacle DPs by the term "(OBSTACLE)" included in the procedure title; e.g., TETON TWO (OBSTACLE). If not assigned a SID or radar vector by ATC, an ODP may be flown without ATC clearance to ensure obstacle clearance.

Graphic DPs designed by ATC to standardize traffic flows, ensure aircraft separation and enhance capacity are referred to as "Standard Instrument Departures (SIDs)". SIDs also provide obstacle clearance and are published under the appropriate airport section. ATC clearance must be received prior to flying a SID.

CIVIL USERS NOTE: Title 14 Code of Federal Regulations Part 91 prescribes standard take-off rules and establishes take-off minimums for certain operators as follows: (1) Aircraft having two engines or less - one statute mile. (2) Aircraft having more than two engines - one-half statute mile. These standard minima apply in the absence of any different minima listed below.

MILITARY USERS NOTE: Civil (nonstandard) take-off minima are published below. For military take-off minima, refer to appropriate service directives.

NAME TAKE-OFF MINIMUMS

BATTLE MOUNTAIN, NV

BATTLE MOUNTAIN (BAM)

AMDT 3 09127 (FAA)

TAKE-OFF MINIMUMS: **Rwy 3**, std. w/ a min climb of 282' per NM to 7300 or 4700-3 for climb in visual conditions. **Rwy 12**, std. w/ a min climb of 386' per NM to 7600 or 4700-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 3**, climb heading 032° to 8200 before proceeding on course or climb in visual conditions to cross Battle Mountain Airport at or above 9100 before proceeding on course. **Rwy 12**, climb heading 122° and BAM R-076 to 10000 before proceeding on course or climb in visual conditions to cross Battle Mountain Airport at or above 9100 before proceeding on course. **Rwy 21**, climb direct BAM VORTAC and BAM R-205 to 10100 before proceeding on course. **Rwy 30**, climb heading 302° and BAM R-324 to 9100 before proceeding on course.

BEAVER, UT

BEAVER MUNI

TAKE-OFF MINIMUMS: **Rwys 7, 25**, NA-obstacles.**Rwys 13, 31**, 2600-2% for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwys 13, 31**, climb in visual conditions to cross Beaver Muni Airport Northwestbound at or above 8300 then climb to 10100 via MLF VORTAC R-102 to MLF VORTAC. Do not exceed 210 KIAS until established on MLF VORTAC R-102.

NAME TAKE-OFF MINIMUMS

BLANDING, UT

BLANDING MUNI

TAKE-OFF MINIMUMS: **Rwy 35**, 800-1 or std. with a min. climb of 350 feet per NM to 6700.

DEPARTURE PROCEDURE: **Rwy 17**, turn left. **Rwy 35**, turn right climb to 9000 via heading 090° and DVC R-223 to DVC VORTAC, then continue climb on course to MEA.

BRIGHAM CITY, UT

BRIGHAM CITY (BMC)

AMDT 5 09295 (FAA)

TAKE-OFF MINIMUMS: **Rwy 34**, std. w/ min. climb of 325' per NM to 5300 or 5100-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 16**, climbing right turn heading 205° and OGD R-331 to OGD VORTAC. **Rwy 34**, climbing left turn heading 205° and OGD R-331 to OGD VORTAC or for climb in visual conditions: cross Brigham City airport southbound at or above 9200 then via OGD R-351 to OGD VORTAC.

NOTE: **Rwy 16**, poles 266' from DER, 558' right of centerline, 30' AGL/4258' MSL.

**BULLHEAD CITY, AZ**

LAUGHLIN/BULLHEAD INTL (IFP)

AMDT 1 09183 (FAA)

TAKE-OFF MINIMUMS: **Rwy 16**, std. w/ a min. climb of 370' per NM to 1800, or 1700-3 for climb in visual conditions. **Rwy 34**, std. w/ a min. climb of 495' per NM to 5500, or 1700-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 16**, climb via heading 164° and EED VORTAC R-334 to EED VORTAC, or for climb in visual conditions: cross Laughlin/Bullhead Intl airport at or above 2300, then continue climbing via heading 155° and EED VORTAC R-335 to EED VORTAC. **Rwy 34**, climb via heading 344° to 1600, then climbing right turn direct EED VORTAC, or for climb in visual conditions: cross Laughlin/Bullhead Intl airport at or above 2300, then continue climbing via heading 155° and EED VORTAC R-335 to EED VORTAC. **All**

Aircraft climb in EED VORTAC holding pattern (East, right turn, 257° inbound) to cross EED VORTAC at or above MEA for direction of flight before proceeding on course.

NOTE: **Rwy 16**, multiple bushes beginning 3600' from DER, left of centerline, up to 12' AGL/1029' MSL.

Rwy 34, multiple poles beginning 2211' from DER, right of centerline, up to 105' AGL/821' MSL.

CARSON CITY, NV

CARSON (CXP)

ORIG 08325 (FAA)

TAKE-OFF MINIMUMS: **Rwy 27**, NA-obstacles.

DEPARTURE PROCEDURE: **Rwy 9**, use JIMPA DEPARTURE.

CASA GRANDE, AZ

CASA GRANDE MUNI

DEPARTURE PROCEDURE: **Rwy 5**, right turn. **Rwy 23**, climb direct TFD VORTAC. Continue climb in holding pattern (SW, right turn, 048° inbound) to MEA for direction of flight.

CEDAR CITY, UT

CEDAR CITY RGNL

TAKE-OFF MINIMUMS: **Rwy 8**, 3500-3 or std. with a min. climb of 450' per NM to 10000.

DEPARTURE PROCEDURE: **Rwys 20, 26**, turn right. **Rwys 2, 8**, turn left, climb direct to CDC VOR/DME, continue climb to 9000 via R-348. Northbound continue on course. All others reverse course, climb to cross CDC VOR/DME at or above MCA for direction of flight.

CHANDLER, AZ

CHANDLER MUNI

DEPARTURE PROCEDURE: **Rwy 4R**, climbing left turn heading 220°. **Rwys 22L, 22R**, climbing left turn heading 190°. **All Aircraft**, continue climb via TFD R-350 to TFD VORTAC.

NOTE: **Rwy 4L**, multiple towers and buildings beginning 69' from departure end of runway, 397' left of centerline, up to 80' AGL/1319' MSL.

CHANDLER, AZ (CON'T)

STELLAR AIRPARK

DEPARTURE PROCEDURE: **Rwy 17**, turn left, climb via heading 150°. **Rwy 35**, turn right. **All aircraft** climb via TFD R-350 direct TFD VORTAC.

NOTE: **Rwy 17**, tower and signs beginning 574' from departure end of runway, 183' right of centerline, up to 50' AGL/1124' MSL. Sign 611' from departure end of runway, 365' left of centerline, 42' AGL/1214' MSL.

COLORADO CITY, AZ

COLORADO CITY MUNI

TAKE-OFF MINIMUMS: **Rwy 2**, NA.DEPARTURE PROCEDURE: **Rwy 11**, turn right.

Rwys 20, 29, turn left. **All aircraft** climb to 7400 via the 160° bearing from AZC NDB then continue climb on course.

COOLIDGE, AZ

COOLIDGE MUNI

DEPARTURE PROCEDURE: **Rwys 5, 35**, climbing left turn heading 280° to intercept TFD R-063, then via R-063 to TFD VORTAC before proceeding on course.

Rwy 17, climbing right turn heading 240° to intercept TFD R-090, then via R-090 to TFD VORTAC before proceeding on course. **Rwy 23**, climb runway heading to intercept TFD R-090, then via R-090 to TFD VORTAC before proceeding on course.

DAVIS-MONTHAN AFB (KDMA)

TUCSON, AZ.07186

Diverse departures not authorized, use published departure procedure for obstacle avoidance.

TAKE-OFF OBSTACLES: **Rwy 12**: Terrain 0' AGL/2707' MSL, 81' from DER, 500' left of centerline. Terrain 0' AGL/2707' MSL, 46' from DER, 512' left of centerline. Terrain 0' AGL/2707' MSL, 16' from DER, 500' left of centerline. Terrain 0' AGL/2706' MSL, 0' from DER, 200' left of centerline. **Rwy 30**: Terrain 0' AGL/2592' MSL, 0' from DER, 106' left of centerline. Terrain 0' AGL/2592' MSL, 7' from DER, 97' left of centerline. Terrain 0' AGL/2592' MSL, 0' from DER, 484' right of centerline. Terrain 0' AGL/2592' MSL, 13' from DER, 493' right of centerline. Vehicle 11' AGL/2615' MSL, 1017' from DER, 477' left of centerline. Terrain 0' AGL/2612' MSL, 237' from DER, 590' left of centerline.

DELTA, UT

DELTA MUNI

TAKE-OFF MINIMUMS: **Rwy 17**, std. with a min. climb of 412' per NM to 6600, or 1800-3 for climb in visual conditions. Climb in visual conditions NA at night. **Rwy 12**, NA-terrain. **Rwy 30**, NA-airspace.

DEPARTURE PROCEDURE: **Rwy 17**, climb via DTA VORTAC R-347 to DTA VORTAC, or climb in visual conditions to cross departure end of runway southbound at or above 6400, then via DTA VORTAC R-347 to DTA VORTAC, thence... **Rwy 35**, climb via heading 346° to 5800, then climbing left turn via heading 180° and DTA VORTAC R-310 to DTA VORTAC, thence...
...climb in holding pattern (hold south, left turn, 004° inbound) to cross DTA VORTAC at or above airway MEA for route of flight.

NOTE: **Rwy 17**, trees 1598' from departure end of runway, 62' right of centerline, 60' AGL/4799' MSL.



DOUGLAS BISBEE, AZ**BISBEE- DOUGLAS INTL**

DEPARTURE PROCEDURE: Climb to 5700 in holding pattern, right turn to 140 inbound DUG VORTAC, then assigned route. CAT C,D turbojets climb not to exceed 250 kts. to 8000.

DUCHESNE, UT**DUCHESNE MUNI**

DEPARTURE PROCEDURE: Climb direct to MTU VORTAC to depart at or above 7200 eastbound or 10000 westbound.

ELKO, NV**ELKO RGNL**

TAKE-OFF MINIMUMS: **Rwy 5**, 2500-3 or std. with a min. climb of 330' per NM to 8000. **Rwy 23**, 2500-3 or std. with a min. climb of 340' per NM to 8000.

DEPARTURE PROCEDURE: **Rwy 5**, climb runway heading to 6000, then climbing right turn direct BQU VOR/DME, then...

Rwy 23, (V32 Southwest) climb to 6000, then climbing left turn heading 200° to intercept BQU R-241 (V32).

Rwy 23, all others climb runway heading to 6000, then climbing left turn direct BQU VOR/DME, then... climb in BQU VOR/DME holding pattern (S, left turns, 340° inbound) to cross BQU VOR/DME at the MEA/MCA/MOCA for direction of flight.

ELY, NV**ELY AIRPORT-YELLAND FIELD**

TAKE-OFF MINIMUMS: **Rwys 30,36**, 3000-2 or std. with a min. climb of 700' per NM to 10000.

DEPARTURE PROCEDURE: **Rwys 12,30,36**, right turn; **Rwy 18**, straight ahead; intercept. ELY VOR/DME R-150 to 10000. Aircraft departing on V293 southeast climb on course to MEA. Departures V269 or V293 northbound, reverse course to the left, continue climb to cross ELY VOR/DME at or above 12000.

FALLON, NV**FALLON MUNI**

TAKE-OFF MINIMUMS: **Rwy 13**, 300-1 or std. with a min. climb of 350' per NM to 4300.

DEPARTURE PROCEDURE: **Rwy 21**, turn right.

Rwys 3,13,31, turn left. All departures climb via HZN R-075 to HZN VORTAC. Climb in holding pattern (W, right turns, 075° inbound) to depart HZN VORTAC at or above: R-240 CWR-149, 8000; R-150 CWR-239, 9000. Continue climb on course to MEA or assigned altitude.

FALLON NAS (KNFL)**FALLON, NV**

Diverse departures not authorized.

FLAGSTAFF, AZ**FLAGSTAFF PULLIAM**

DEPARTURE PROCEDURE: **Rwy 3**, turn right. **Rwy 21**, turn left. Aircraft departing FLG R-160 CWR-175 climb on course. All others climb southbound on FLG R-172 to 9000, then climbing left turn direct FLG VOR/DME.

FORT HUACHUCA-SIERRA VISTA, AZ**SIERRA VISTA MUNI-LIBBY AAF**

TAKE-OFF MINIMUMS: **Rwy 21**, NA.

DEPARTURE PROCEDURE: **Rwys 3,8,12**, turn left.

Rwys 26,30, turn right. All aircraft climb to 9500 to TOMBS Int via FHU VOR R-019 or 018° bearing from DAO NDB.

GLENDALE, AZ**GLENDALE MUNI**

TAKE-OFF MINIMUMS: **Rwy 19**, NA-ATC.

DEPARTURE PROCEDURE: **Rwy 1**, Use DRAKE (RNAV) DEPARTURE.

GLOBE, AZ**SAN CARLOS APACHE (P13)**

ADMT 2 08101 (FAA)

DEPARTURE PROCEDURE: Use IZTIR DEPARTURE.

GOODYEAR, AZ**PHOENIX GOODYEAR**

TAKE-OFF MINIMUMS: **Rwy 3**, NA-ATC.

DEPARTURE PROCEDURE: **Rwy 21**, Use POTER DEPARTURE.

GRAND CANYON, AZ**GRAND CANYON NATIONAL PARK**

TAKE-OFF MINIMUMS: **Rwy 3**, NA-environmental.

DEPARTURE PROCEDURE: **Rwy 21**, use GRAND DEPARTURE.

HEBER CITY, UT**HEBER CITY MUNI-RUSS MCDONALD FIELD**

DEPARTURE PROCEDURE: **Rwy 3**, Use COOLI RNAV DEPARTURE.

HILL AFB (KHIF)**OGDEN, UT**

Diverse departures not authorized, use radar vectors or published Departure Procedures (DP) for obstacle avoidance.

HUNTINGTON, UT**HUNTINGTON MUNI (69V)**

AMDT 2A 09295 (FAA)

TAKE-OFF MINIMUMS: **Rwys 18,26,36**, NA. **Rwy 30**, 1700-3 or std. with a min. climb of 300' per NM to 8100.

DEPARTURE PROCEDURE: **Rwys 8,12**, climbing left turn direct PUC VOR/DME...

Rwy 30, climbing right turn direct PUC VOR/DME.... continue climb in PUC VOR/DME holding pattern (hold S, right turns, 009° inbound) to MEA for direction of flight.

NOTE: **Rwy 8**, tree 2663' from DER, 922' left of centerline, 40' AGL/5979' MSL. **Rwy 12**, tree 333' from DER, 132' right of centerline, 40' AGL/5919' MSL.

Rwy 30, tree 2065' from DER, 875' left of centerline, 40' AGL/5999' MSL.

KANAB, UT**KANAB MUNI**

TAKE-OFF MINIMUMS: **Rwy 1**, std. with a min. climb of 316' per NM to 7200.

NOTE: Use KACIR ONE RNAV DEPARTURE.

KINGMAN, AZ**KINGMAN**

TAKE-OFF MINIMUMS: **Rwys 3, 17, 21, 35**, 800-1 or std. with a min. climb of 210' per NM to 7000.

DEPARTURE PROCEDURE: Climb northbound on IGM R-010 until reaching 6000; reverse course to the left and continue climb to 9000 direct to IGM. If unable to cross IGM at 9000 continue climb in IGM holding pattern (SW, left turns, 027° inbound).

LAGUNA AAF (LGF)**YUMA PROVING GROUND, AZ (03247)**

Rwy 6, 18, 36 turn right, climb to 3600 direct BZA VORTAC.

Rwy 24 climb to 3600 direct to BZA VORTAC.

TAKE-OFF OBSTACLES:

Rwy 18: 386' (6' AGL) windsock, 818' from departure end of rwy, 194' left of centerline.

LAKE HAVASU CITY, AZ**LAKE HAVASU CITY**

TAKE-OFF MINIMUMS: **Rwy 14**, 300-1½ or std. w/ min. climb of 278' per NM to 1200. **Rwy 32**, 600-1½ or std. w/ min. climb of 492' per NM to 1100.

DEPARTURE PROCEDURE: **Rwy 14**, climbing right turn heading 300° to intercept EED VORTAC R-155 to EED VORTAC, climb in EED VORTAC holding pattern (east, right turn, 257° inbound) to cross EED VORTAC at or above airway MEA for route of flight. **Rwy 32**, climbing left turn heading 290° to intercept EED VORTAC R-155 to EED VORTAC, climb in EED VORTAC holding pattern (east, right turn, 257° inbound) to cross EED VORTAC at or above airway MEA for route of flight.

NOTE: **Rwy 14**, obstruction light on transmission tower, 1.2 NM from departure end of runway, 1885' left of centerline, 151' AGL/1027' MSL. Transmission tower 1.4 NM from departure end of runway, 1953' left of centerline, 145' AGL/1058' MSL. Bush 1080' from departure end of runway, 500' left of centerline, 31' AGL/825' MSL. Terrain 145' from departure end of runway, 347' left of centerline, 14' AGL/797' MSL. Bush 1256' from departure end of runway, 255' left of centerline, 35' AGL/818' MSL. **Rwy 32**, obstruction light on transmission tower 4052' from departure end of runway, 932' right of centerline, 180' AGL/974' MSL. Transmission tower 2504' from departure end of runway, 1009' right of centerline, 112' AGL/903' MSL.

LAS VEGAS, NV**HENDERSON EXECUTIVE**

TAKE-OFF MINIMUMS: **Rwy 17L/R**, Cat A/B std. with a min. climb of 491' per NM to 6000, or 2100-3 for climb in visual conditions, Cat C/D NA. **Rwy 35L/R**, Cat A/B std. with a min. climb of 312' per NM to 4700, or 2100-3 for climb in visual conditions, Cat C/D NA.

DEPARTURE PROCEDURE: **Rwy 17L/R**, climbing right turn via LAS R-157 to LAS VORTAC before proceeding on course, or for climb in visual conditions: Cross Henderson Executive Airport eastbound at or above 4500, then via BLD R-249 to BLD VORTAC. **Rwy 35L/R**, climbing right turn via BLD R-257 to BLD VORTAC before proceeding on course, or for climb in visual conditions: Cross Henderson Executive Airport eastbound at or above 4500, then via BLD R-249 to BLD VORTAC.

NOTE: **Rwy 17L**, tree 5610' from departure end of runway, 82' left of centerline, 100' AGL/2739' MSL. Tree 1.9 miles from departure end of runway, 1495' left of centerline, 100' AGL/2859' MSL. **Rwy 17R**, tree 4041' from departure end of runway, 859' left of centerline, 100' AGL/2739' MSL.

MCCARRAN INTL (KLAS)

TAKE-OFF MINIMUMS: **Rwy 25R**, 200-1 or std. with a min. climb of 220' per NM to 2400.

DEPARTURE PROCEDURE: **Rwys 1L, 1R**, climbing right turn direct BLD VORTAC. **Rwys 7L, 7R**, climb via heading 075° to 3400 then climbing right turn direct BLD VORTAC. **Rwys 19L, 19R**, climbing left turn via heading 120° and BLD VORTAC R-257 to BLD VORTAC. **Rwys 25L, 25R**, climb via heading 255° to 2700 then climbing right turn direct BLD VORTAC.

NOTE: **Rwy 1L**, multiple poles, tree, and building 450' from departure end of runway, 283' left of centerline, up to 174' AGL/2132' MSL. Obstruction light on WSK 248' from departure end of runway, 224' right of centerline, 15' AGL/2104' MSL. **Rwy 1R**, multiple sign and building 1331' from departure end of runway, 448' right of centerline, up to 100' AGL/2120' MSL. **Rwy 7L**, multiple poles and trees 747' from departure end of runway, 442' right of centerline, up to 62' AGL/2062' MSL. Tree 1257' from departure end of runway, 789' left of centerline, 65' AGL/2077' MSL. **Rwy 7R**, lighted WSK 126' from departure end of runway, 290' right of centerline, 25' AGL/2051' MSL. **Rwy 19L**, multiple poles, sign and building 1394' from departure end of runway, 320' right of centerline, up to 51' AGL/2256' MSL. **Rwy 19R**, multiple poles, sign, and building 197' from departure end of runway, 125' right of centerline, up to 51' AGL/2256' MSL. Multiple pole and building 1396' from departure end of runway, 356' left of centerline, up to 47' AGL/2262' MSL. **Rwy 25L**, multiple poles, sign, and building 1003' from departure end of runway, 251' left of centerline, up to 63' AGL/2256' MSL. **Rwy 25R**, multiple poles and road 675' from departure end of runway, 17' right of centerline, up to 100' AGL/2301' MSL. Multiple poles and buildings 533' from departure end of runway, 1' left of centerline, up to 150' AGL/2469' MSL.

NORTH LAS VEGAS (VGT)**AMDT 3 08045 (FAA)**

DEPARTURE PROCEDURE: Use BOULDER CITY DEPARTURE.

TAKE-OFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

LOGAN, UT

LOGAN-CACHE (LGU)

AMDT 8 09351 (FAA)

TAKE-OFF MINIMUMS: **Rwys 10, 28**, NA-obstacles.

DEPARTURE PROCEDURE: **Rwys 17, 35**, use ORNEY DEPARTURE.

LOVELOCK, NV

DERBY FIELD (LOL)

ORIG-A 08297 (FAA)

TAKE-OFF MINIMUMS: **Rwy 1**, 2300-2 or std. with a min. climb of 300' per NM to 6200. **Rwy 7**, 1100-1 or std. with a min. climb of 250' per NM to 5000. **Rwys 19, 25**, 2300-2 or std. with a min. climb of 260' per NM to 6200.

DEPARTURE PROCEDURE: **Rwy 1**, turn right.

Rwys 7, 19, 25, turn left, climb direct LLC VORTAC. Aircraft departing 330° CW 359° climb via LLC R-333 to ROBUD INT; 360° CW 089° climb in LLC VORTAC holding pattern (hold NW, left turns, 153° inbound) to depart LLC VORTAC at or above 8600; 090° CW 219° climb on course; 220° CW 329° climb in LLC VORTAC holding pattern to depart LLC VORTAC at or above 8600. Continue climb on course to MEA or assigned altitude.

LUKE AFB (KLUF)

GLENDAL, AZ AMDT 3, 09183

Diverse departures not authorized.

Use published DP, if unable to comply with DP notify clearance delivery and request RADAR Vectors.

TAKE-OFF OBSTACLES:

RWY 3L: Taxiing aircraft, 19' AGL/1126' MSL, 1221' from DER, 782' left of centerline. Taxiing aircraft, 19' AGL/1126' MSL, 1407' from DER, 609' left of centerline. Weather equipment, 15' AGL/1117' MSL, 759' from DER, 505' right of centerline. Weather equipment, 15' AGL/1117' MSL, 1209' from DER, 505' right of centerline. Building, 20' AGL/1127' MSL, 1620' from DER, 925' left of centerline.

RWY 21L: Taxiing aircraft, 38' AGL/1120' MSL, 1428' from DER, 774' left of centerline.

MESA, AZ

FALCON FIELD

TAKE-OFF MINIMUMS: **Rwys 4L, 4R**, std. with a min. climb of 459' per NM to 3600, or 1100-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 4L, 4R**, climbing left turn to 5000 via 220° bearing from FFZ NDB to intercept the PXR VORTAC R-143 southeast bound. For climb in visual conditions cross FFZ NDB at or above 2300 then proceed via 220° bearing to PXR R-143 southeast bound. **Rwy 22L, 22R**, climb to 5000 via 220° bearing from FFZ NDB to intercept the PXR VORTAC R-143 southeast bound.

NOTE: **Rwy 4L**, light standard 416' from departure end of runway, 415' left of centerline, 48' AGL/1428' MSL. Obstacle light on building 1313' from departure end of runway, 424' left of centerline, 54' AGL/1434' MSL. **Rwy 4R**, light standard 514' from departure end of runway, 565' right of centerline, 48' AGL/1441' MSL. Tree 1097' from departure end of runway, 650' right of centerline, 50' AGL/1448' MSL. Tree 1060' from departure end of runway, 359' right of centerline, 50' AGL/1451' MSL. **Rwy 22L**, light pole 254' from departure end of runway, 538' right of centerline, 13' AGL/1382' MSL. Windmill 691' from departure end of runway, 528' right of centerline, 30' AGL/1389' MSL. Windmill 715' from departure end of runway, 603' right of centerline, 30' AGL/1389' MSL. Light pole 68' from departure end of runway, 764' right of centerline, 13' AGL/1382' MSL. Tree 175' from departure end of runway, 826' right of centerline, 13' AGL/1383' MSL. **Rwy 22R**, light pole 296' from departure end of runway, 541' right of centerline 13' AGL/1400' MSL. Light pole 495' from departure end of runway, 187' right of centerline, 13' AGL/1382' MSL. Light pole 594' from departure end of runway, 65' right of centerline, 13' AGL/1382' MSL.

MESQUITE, NV

MESQUITE

TAKE-OFF MINIMUMS: **Rwy 1**, 900-3, or std. with a min. climb of 620' per NM to 2400.

DEPARTURE PROCEDURE: **Rwy 1**, climbing left turn, **Rwy 19**, climbing right turn. **All aircraft** climb direct MMM VORTAC. Aircraft departing MMM R-149 CW R-220 climb on course. All others continue climb via MMM R-196 to 6100 and reverse course to cross MMM VORTAC at or above: R-221 CW R-270 and R-331 CW R-060, 6100; R-271 CW R-330, 7300; R-061 CW R-150, 8300.

MICHAEL AAF (KDPG),

DUGWAY PROVING GROUND, UT

.....Amdt 1, 09099
Rwy 12, 4700-3*

* Or standard with minimum climb of 305 ft/NM to 6100.

DEPARTURE PROCEDURES: **Rwy 12** Climb via heading 122° to 6100, then right turn direct DPG NDB. Continue climb in DPG NDB holding pattern (Hold W, LT, 080° inbound) to 9600 before proceeding on course, or for climb in visual conditions: Cross Michael AAF, Dugway Proving Ground at or above 8900 before proceeding on course. **Rwy 30** Climb via heading 302° to 6100 then left turn direct DPG NDB, continue climb in DPG NDB holding pattern (Hold W, LT, 080° inbound) to 9600 before proceeding on course.

MILFORD, UT

MILFORD MUNI/BEN AND JUDY BRISCOE FIELD

TAKE-OFF MINIMUMS: **Rwy 34**, CAT A,B 1200-2 or std. with a min. climb of 360' per NM to 6500. CAT C,D NA.
DEPARTURE PROCEDURE: **Rwy 16**, climb direct MLF VORTAC. **Rwy 34**, climbing left turn direct MLF VORTAC. Aircraft departing MLF R-170 CW R-210 climb on course. All other aircraft continue climb southbound via MLF R-190 to 7600, then climbing right turn to cross MLF VORTAC at or above 9000, then climb on course.

MINDEN, NV

MINDEN-TAHOE

TAKE-OFF MINIMUMS: **Rwys 12,16,30**, NA. **Rwy 34**, 4000-3 or std. with a min. climb of 531' per NM to 8700.
DEPARTURE PROCEDURE: **Rwy 34**, use MINDEN RNAV DEPARTURE.

MOAB, UT

CANYONLANDS FIELD

TAKE-OFF MINIMUMS: **Rwy 3**, std. with a min. climb of 320' per NM to 5800. **Rwy 21**, std. with a min. climb of 330' per NM to 5400.
DEPARTURE PROCEDURE: **Rwy 3**, turn left. **Rwy 21**, turn right climb to 6700 via OAB R-293, then climbing right turn direct OAB VOR/DME. Climb in OAB holding pattern (NW, left turns, 113° inbound) to 10000 then proceed on course.

NOTE: **Rwy 3**, tree 4383' from departure end of runway, 1507' right of centerline, 50' AGL/4729' MSL. Road 1749' from departure end of runway, 905' left of centerline, 15' AGL/4635' MSL. Tree 3914' from departure end of runway, 1166' right of centerline, 50' AGL/4690' MSL. Tree 1.25 NM from departure end of runway, 400' right of centerline, 50' AGL/4758' MSL. **Rwy 21**, pole 2026' from departure end of runway, 78' right of centerline, 80' AGL/4625' MSL. Pole 2061' from departure end of runway, 40' right of centerline, 80' AGL/4625' MSL. Pole 2095' from departure end of runway, 857' right of centerline, 80' AGL/4623' MSL. Pole 1980' from departure end of runway, 344' right of centerline, 80' AGL/4602' MSL.

NELLIS AFB (KLSV)

LAS VEGAS, NV

08241

Rwy 3L/R, 10,200-3° SR-SS
Rwy 21L/R, 10,200-3° SR-SS

Diverse departure not authorized.

MILITARY: Use published DP, if unable to comply with DP climb gradient file appropriate DP for intended destination and notify clearance delivery and request RADAR Vectors (Climb Gradient of 300' per NM until 12,000 for RADAR Vectors). If unable to comply with RADAR Vector climb gradient, A/C must depart VFR.

* CIVIL: Use published DP, if unable to comply with DP climb gradient file appropriate DP for intended destination and notify clearance delivery and request RADAR Vectors (Climb Gradient of 330' per NM until 12,000 for RADAR Vectors). If unable to comply with RADAR Vectors climb gradient, A/C may use published weather minimums or depart VFR.

TAKE-OFF OBSTACLES: **RWY 3L**: Terrain 0' AGL/1870' MSL, 0' inward of DER, 500' left of centerline. Road 15' AGL/1934' MSL, 1321' from DER, 802' left of centerline. **RWY 3R**: C-5 on taxiway 65' AGL/1936' MSL, 1345' from DER, 822' right of centerline. Road 15' AGL/2014' MSL, 3929' from DER, 1404' right of centerline. **RWY 21L**: Trees 90' AGL/1949' MSL, 4594' from DER, 1596' right of centerline. Trees 90' AGL/1949' MSL, 4940' from DER, 541' right of centerline. Trees 60' AGL/1899' MSL 929' from DER, 724' left of centerline. Trees 60' AGL/1899' MSL, 946' from DER, 626' left of centerline. Trees 60' AGL/1899' MSL, 2720' from DER, 341' left of centerline. Trees 60' AGL/1899' MSL, 2514' from DER, 403' left of centerline.

RWY 21R: Terrain 0' AGL/1835' MSL, 0' inward of DER, 500' right of centerline. Trees 90' AGL/1949' MSL, 4594' from DER, 597' right of centerline. Building 45' AGL/1904' MSL, 2274' from DER, 1037' right of centerline. Road 15' AGL/1874' MSL, 1404' from DER, 465' right of centerline.

NOGALES, AZ

NOGALES INTL (OLS)

AMDT 2 09351 (FAA)

TAKE-OFF MINIMUMS: Use NOGALES DEPARTURE.

OGDEN, UT

OGDEN-HINCKLEY (OGD)

AMDT 2 08101 (FAA)

TAKE-OFF MINIMUMS: **Rwys 7,16**, NA- Obstacles.
DEPARTURE PROCEDURE: **Rwys 3, 21, 25, 34**, Use EMONT DEPARTURE.



PAGE, AZ

PAGE MUNI (PGA)

AMDT 2 08045 (FAA)

TAKE-OFF MINIMUMS: **Rwys 7, 25**, NA—obstacles **Rwy 15**, 300-1 or std. w/min. climb of 252' per NM to 6500, or 1900-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 15**, climb via 157° heading to 6000, then climbing right turn to PGA VOR/DME. cross PGA VOR/DME at or above 7700. Continue climb in PGA VOR/DME holding pattern (hold NW, right turns, 147° inbound) to airway MEA, or climb in visual conditions: cross Page airport at or above 6100, before proceeding on course. **Rwy 33**, climb via 337° heading to 6000, then climbing left turn to PGA VOR/DME. Cross PGA VOR/DME at or above 7700. Continue climb in PGA VOR/DME holding pattern (hold NW, right turns, 147° inbound) to airway MEA.

NOTE: **Rwy 15**, terrain 192' from departure end of runway, 274' right of centerline, 4323' MSL, tree 1.07 NM from departure end of runway, 167' left of centerline, 4519 MSL, transmission lines 1.96 NM from departure end of runway, 825' left of centerline, 100' AGL/4519' MSL, power line 4.00 NM from departure end of runway, 3606' right of centerline, 75' AGL/4819' MSL, power line 4.35 NM from departure end of runway, 3968' right of centerline, 75' AGL/4919' MSL, power line 5.36 NM from departure end of runway, 5039' right of centerline, 75' AGL/5119' MSL, power line 4.51 NM from departure end of runway, 4136' right of centerline, 75' AGL/5019' MSL, tree 4.52 NM from departure end of runway, 1508' right of centerline, 100' AGL/5173' MSL, AAO 4.58 NM from departure end of runway, 1617' right of centerline, 200' AGL/5187' MSL, AAO 5.15 NM from departure end of runway, 4456' left of centerline, 200' AGL/5190' MSL, tree 5.56 NM from departure end of runway, 4097' right of centerline, 30' AGL/5249' MSL, AAO 5.98 NM from departure end of runway, 653' left of centerline, 200' AGL/5440' MSL.

PARKER, AZ

AVI SUQUILLA

TAKE-OFF MINIMUMS: **Rwy 1**, 800-1½. **Rwy 19**, 300-1. DEPARTURE PROCEDURE: **Rwy 19**, right turn. **Rwy 1**, left turn. Climb via R-067 to PKE VORTAC, to cross above 4500. Continue climb on course to MEA or assigned altitude.

PAYSON, AZ

PAYSON

TAKE-OFF MINIMUMS: **Rwy 6**, std. with a min. climb of 360' per NM to 9300, or 2500-3 for climb in visual conditions. **Rwy 24**, std. with a min. climb of 375' per NM to 9300, or 2500-3 for climb in visual conditions. DEPARTURE PROCEDURE: **Rwys 6, 24**, for climb in visual conditions: Cross Payson Airport at or above 7500, then proceed on course.

NOTE: **Rwy 24**, bush 15' from departure end of runway, 133' right of centerline, 6' AGL/5148' MSL. Tree 320' from departure end of runway, 183' right of centerline, 12' AGL/5154' MSL. Fence 85' from departure end of runway, 84' left of centerline, 4' AGL/5141' MSL. Tree 164' from departure end of runway, 126' left of centerline, 9' AGL/5147' MSL.

PHOENIX, AZ

PHOENIX-DEER VALLEY

DEPARTURE PROCEDURE: Use DEER VALLEY DEPARTURE.

PHOENIX SKY HARBOR INTL (PHX)

AMDT 4A 09071 (FAA)

TAKE-OFF MINIMUMS: **Rwy 26**, 700-3 or std. with a min. climb of 358' per NM to 2000.

DEPARTURE PROCEDURE: **Rwys 7L, 7R, 8**, climb via 078° heading to 3000, then climbing right turn direct PHOENIX (PXR) VORTAC. **Rwys 25L, 25R**, climb via 258° heading to 1550 then climbing right turn to join the PXR R-260 (V16) westbound, climb to 5000. **Rwy 26**, climb via 258° heading to 1550 then climbing left turn to join the PXR R-260 (V16) westbound, climb to 5000. Westbound departures continue climb on PXR R-260. All others, climbing right turn direct PXR VORTAC.

NOTE: **Rwy 7L**, building 1332' from DER, 798' left of centerline, 67' AGL/1176' MSL. **Rwy 7R**, rod 716' from DER, 184' right of centerline, 87' AGL/1196' MSL. **Rwy 8**, light standard 3530' from DER, 1207' left of centerline, 123' AGL/1232' MSL. Light standard 3479' from DER, 1003' left of centerline, 118' AGL/1227' MSL. **Rwy 25L**, light standard 1129' from DER, 774' left of centerline, 91' AGL/1200' MSL. ASDE-X equipment 411' from DER, 531' left of centerline, 29' AGL/1135' MSL. **Rwy 26**, light 59' from DER, 63' right of centerline, 16' AGL/1125' MSL. Pole 58' from DER, 90' right of centerline, 25' AGL/1125' MSL. Light 78' from DER of runway, 64' right of centerline, 18' AGL/1127' MSL. Light 38' from DER, 440' left of centerline, 24' AGL/1135' MSL. Light standard 77' from DER, 453' left of centerline, 27' AGL/1136' MSL. Light standard 74' from DER, 456' right of centerline, 33' AGL/1142' MSL. Light standard 77' from DER, 434' right of centerline, 31' AGL/1140' MSL. Tree 113' from DER, 294' right of centerline, 24' AGL/1133' MSL. Building 2.32 NM from DER, 3309' right of centerline, 406' AGL/1496' MSL. Building 2.28 NM from DER, 3612' right of centerline, 663' AGL/1258' MSL. Tree 234' from DER, 214' right of centerline, 24' AGL/1133' MSL. Light standard 64' from DER, 68' left of centerline, 39' AGL/1125' MSL. ASDE-X equipment 897' from DER, 413' right of centerline, 35' AGL/1141' MSL.

PHOENIX-MESA GATEWAY

TAKE-OFF MINIMUMS: **Rwys 30L, 30C, 30R**, CAT C,D,E 2000-2 or std. with a min. climb of 230' per NM to 3900.

DEPARTURE PROCEDURE: **Rwys 12L, 12C, 12R**, climb to 2500 via IWA R-122 then climbing right turn direct PXR VORTAC. **Rwys 30L, 30C, 30R**, climbing right turn to 4000 via IWA R-122 then climbing right turn direct PXR VORTAC.



**PRESCOTT, AZ****ERNEST A. LOVE FIELD**

TAKE-OFF MINIMUMS: **Rwy 12**, 2700-2 or std. with a min. climb of 460' per NM to 8100. **Rwy 21L**, 2700-2 or std. with a min. climb of 500' per NM to 8100. **Rwy 30**, 300-1 or std. with a min. climb of 300' per NM to 5200. **Rwy 3L, 21R, NA**.

DEPARTURE PROCEDURE: **Rwy 3R**, turn left heading 250° to intercept DRK R-305. **Rwy 12**, turn right direct DRK VORTAC. **Rwy 21L**, turn right heading 335° to intercept DRK R-305. **Rwy 30**, climb direct DRK VORTAC. **All aircraft** continue climb via DRK R-305 to 9000. Aircraft departing via DRK R-305 continue climb on course. All other aircraft turn right direct DRK VORTAC then climb on course.

PRICE, UT**CARBON COUNTY RGNL/BUCK DAVIS FLD (PUC)****AMDT 4 09071 (FAA)**

TAKE-OFF MINIMUMS: **Rwy 7**, NA - per flight check **Rwy 32**, std. w/ min. climb of 425' per NM to 7000, or 3400-3 for climb in visual conditions. **Rwy 36**, std. w/ min. climb of 400' per NM to 7200, or 3400-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 14**, climb on a heading between 126° CW to 193°, thence... **Rwy 18**, climb on a heading between 192° CCW to 125°, thence... **Rwy 25**, climb on a heading between 176° CCW to 124°, thence... **Rwy 32**, climb to 7000 then climbing left turn on a heading between 175° CCW to 145°, thence... **Rwy 36**, climb to 6400 then climbing right turn on a heading between 141° CW to 184°, maintain 210K until completion of turn, thence...
...continue climb to assigned altitude for direction of flight. **Rwys 32, 36**, for climb in visual conditions cross Carbon County Rgnl/ Buck Davis Field at or above 9200 before proceeding on course.

NOTE: **Rwy 14**, multiple trees beginning 121' from DER, 3' left of centerline, up to 40' AGL/5839' MSL. **Rwy 25**, trees 515' from DER, 535' right of centerline, up to 40' AGL/5879' MSL. **Rwy 32**, trees 9544' from DER, 1644' left of centerline, up to 40' AGL/6900' MSL. Trees 11332' from DER, 74' right of centerline, up to 40' AGL/6800' MSL. **Rwy 36**, poles 2599' from DER, 615' left of centerline, 40' AGL/6079' MSL. Poles 2715' from DER, 668' right of centerline, 59' AGL/6098' MSL.

PROVO, UT**PROVO MUNI**

DEPARTURE PROCEDURE: Use PROVO DEPARTURE.

RENO, NV**RENO/STEAD (RTS)****AMDT 3A 09183 (FAA)**

TAKE-OFF MINIMUMS: CAT A,B only, CAT C,D NA.

Rwys 8,14, 1300-2 or std. with a min. climb of 400' per NM to 6500. **Rwy 26**, 1900-2 or std. with a min. climb of 410' per NM to 7200. **Rwy 32**, 2300-2 or std. with a min. climb of 420' per NM to 7200.

DEPARTURE PROCEDURE: **Rwys 8,32**, climbing right turn heading 100° and FMG VORTAC R-314 to FMG VORTAC. **Rwy 14**, left turn climb direct FMG VORTAC. **Rwy 26**, climbing right turn heading 050° and FMG VORTAC R-314 to FMG VORTAC. **All aircraft** climb in FMG VORTAC holding pattern (NE, right turns, 221° inbound) to depart FMG VORTAC; R-260 CW R-170 at or above 10000; R-171 CW R-195 at or above 10500; R-196 CW R-259 at or above 12000.



RENO, NV (CON'T)

RENO/TAHOE INTL (RNO)

AMDT 4 07354 (FAA)

TAKE-OFF MINIMUMS: **Rwy 7**, NA-terrain. **Rwy 16L**, std. w/ min. climb of 730' per NM to 8000, or 600-1½ w/ min. climb of 480' per NM to 8000, or 2700-3 for climb in visual conditions. **Rwy 16R**, std. w/ the following minimum climb requirements: 210 knots or less, 385' per NM to 8000; more than 210 knots, 420' per NM to 8900, or 2700-3 for climb in visual conditions. Resume normal speed after passing FMG VORTAC. **Rwy 25**, std. w/ min. climb of 470' per NM to 7800, or 2700-3 for climb in visual conditions. **Rwy 34L**, std. w/ min. climb of 320' per NM to 7000, or 2700-3 for climb in visual conditions. **Rwy 34R**, std. w/ min. climb of 480' per NM to 7000, or 500-1½ w/ min. climb of 320' per NM to 7000, or 2700-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwys 16L/R**, climb heading 164° to 6600 then climbing left turn direct FMG VORTAC, thence... or for climb in visual conditions: cross Reno/Tahoe Intl Airport at or above 7000 via heading 054° and FMG R-234 to FMG VORTAC, thence... **Rwy 25**, climb heading 254° to 5000 then climbing right turn direct FMG VORTAC, thence... or for climb in visual conditions: cross Reno/Tahoe Intl Airport at or above 7000 via heading 054° and FMG R-234 to FMG VORTAC, thence... **Rwys 34L/R**, climb heading 344° to 7000 then climbing right turn direct FMG VORTAC, thence... or for climb in visual conditions: cross Reno/Tahoe Intl Airport at or above 7000 via heading 054° and FMG R-234 to FMG VORTAC, thence...

... **All aircraft**: continue climb in FMG VORTAC holding pattern (northeast, left turn, 221° inbound) to cross FMG VORTAC at or above MEA/MCA for route of flight.

NOTE: **Rwy 16L**, multiple poles, trees, bushes and terrain beginning 618' from departure end of runway, 133' left of centerline, up to 20' AGL/4961' MSL. **Rwy 16R**, multiple trees 2784' from departure end of runway, 171' right of centerline, up to 20' AGL/4510' MSL. Multiple trees and terrain beginning 746' from departure end of runway, 380' left of centerline, up to 20' AGL/4703' MSL. **Rwy 25**, multiple trees and poles beginning 829' from departure end of runway, 201' right of centerline, up to 103' AGL/4523' MSL. Building 6023' from departure end of runway, 456' right of centerline, 152' AGL/4608' MSL. Fence 222' from departure end of runway, 270' right of centerline, up to 5' AGL/4415' MSL. Multiple trees and poles beginning 500' from departure end of runway, 31' left of centerline, up to 20' AGL/4506' MSL. **Rwy 34L**, multiple trees and poles beginning 1229' from departure end of runway, 180' right of centerline, up to 20' AGL/4498' MSL. Multiple trees beginning 1193' from departure end of runway, 331' left of centerline, up to 20' AGL/4489' MSL. **Rwy 34R**, multiple trees and poles beginning 1067' from departure end of runway, 172' right of centerline, up to 20' AGL/4497' MSL. Multiple trees and poles beginning 1230' from departure end of runway, 350' left of centerline, up to 20' AGL/4498' MSL. Building 1.2 NM from departure end of runway, 1730' right of centerline, 363' AGL/4780' MSL.

RICHFIELD, UT

RICHFIELD MUNI (RIF)

AMDT 1 08157 (FAA)

DEPARTURE PROCEDURE: **Rwy 1**, use RICHFIELD (RNAV) DEPARTURE. **Rwy 19**, use HAMET (RNAV) DEPARTURE.

ROOSEVELT, UT

ROOSEVELT MUNI

TAKE-OFF MINIMUMS: **Rwy 25**, 700-3 or std. with a min. climb of 300' per NM to 6100.

DEPARTURE PROCEDURE: **Rwy 7**, turn right.

Rwy 25, turn left. **All aircraft**, climb direct MTU VORTAC. Aircraft departing MTU VORTAC R-040 CW R-150, climb on course. All others continue climb in MTU holding pattern (NE, right turns, 213° inbound) to cross MTU VORTAC; R-151 CW R-290 at or above 8000; R-291 CW R-039 at or above 10,000. Then climb on course.

SAFFORD, AZ

SAFFORD RGNL

TAKE-OFF MINIMUMS: IFR departure not authorized.

ST. GEORGE, UT

ST. GEORGE MUNI

TAKE-OFF MINIMUMS: **Rwy 34**, 1500-2 or std. with a min. climb of 325' per NM to 4000.

DEPARTURE PROCEDURE: **Rwy 16**, turn left. **Rwy 34**, turn right. Climb in OZN VOR/DME holding pattern (hold SE, right turns, 296° inbound) to depart OZN VOR/DME at or above MEA for direction of flight.

ST. JOHNS, AZ

ST. JOHNS INDUSTRIAL AIR PARK (SJN)

AMDT 1A 08241 (FAA)

TAKE-OFF MINIMUMS: **Rwy 21**, 400-2 or std. with a min. climb of 205' per NM to 6200.

DEPARTURE PROCEDURE: **Rwys 3, 32**, climbing right turn, **Rwys 14, 21**, climbing left turn. **All aircraft**, climb direct SJN VORTAC. Aircraft departing SJN VORTAC R-240 CW R-080 climb on course. All others continue climb in SJN VORTAC holding pattern (Hold NE, right turns, 239° inbound) to cross SJN VORTAC at or above 9000.

NOTE: **Rwy 14**, 5790' tower 350' right abeam departure end of runway.

SALT LAKE CITY, UT

SALT LAKE CITY INTL (SLC)

AMDT 10 09071 (FAA)

TAKE-OFF MINIMUMS: **Rwys 14, 32**, NA, operational.
 DEPARTURE PROCEDURE: **Rwys 16L, 16R**, climb to 10000 via heading 161° and FFU R-341 to FFU VORTAC before proceeding on course. **Rwy 17**, climb to 10000 via heading 166° and FFU R-341 to FFU VORTAC before proceeding on course. **Rwys 34L, 34R**, climb to 9000 via heading 341° and OGD R-153 to OGD VORTAC before proceeding on course. **Rwy 35**, climb to 9000 via heading 336° and OGD R-153 to OGD VORTAC before proceeding on course.

NOTE: **Rwy 16L**, vehicle 124' from DER, 14' right of centerline, 15' AGL/4239' MSL. Light pole 988' from DER, 726' right of centerline, 34' AGL/4254' MSL. Pole 1024' from DER, 689' right of centerline, 34' AGL/4254' MSL. **Rwy 17**, vehicles beginning 335' from DER, on centerline, up to 17' AGL/4241' MSL. **Rwy 34R**, post 13' from DER, 349' right of centerline, 3' AGL/4227' MSL. **Rwy 35**, post 56' from DER, 249' left of centerline, 2' AGL/4220' MSL.

SOUTH VALLEY RGNL AIRPORT (U42)

AMDT 4A 09155 (FAA)

TAKE-OFF MINIMUMS: **Rwy 16**, 2400-3 or std. with a min. climb of 295' per NM to 7700. **Rwy 34**, std. with a min. climb of 353' per NM to 9500.

DEPARTURE PROCEDURE: **Rwy 16**, climbing left turn to 9600 via heading 136° and V21 (TCH R-161 FFU R-341) to FFU VORTAC. Aircraft departing FFU R-156 CW R-263 and R-308 CW R-359 climb on course. All others continue climb in FFU VORTAC holding pattern (S, right turns, 008° inbound) to cross FFU VORTAC at or above: R-360 CW R-093 12400; R-094 CW R-138 10600; R-139 CW R-155 11300; R-264 CW R-307 11500. **Rwy 34**, climbing right turn to 9500 via heading 026° and V21 (TCH R-161) to TCH VORTAC. Aircraft departing TCH R-144 CW R-176 and R-217 CW R-355 climb on course. All others continue climb in TCH VORTAC holding pattern (NW, right turns, 116° inbound) to cross TCH VORTAC at or above: R-356 CW R-116 10700; R-117 CW R-143 11600; R-177 CW R-216 10100.

SCOTTSDALE, AZ

SCOTTSDALE (SDL)

AMDT 7 08269 (FAA)

TAKE-OFF MINIMUMS: **Rwy 3**, std. w/ min climb of 440' per NM to 4000, or 3100-3 for climb in visual conditions. **Rwy 21**, std. w/ min. climb of 215' per NM to 4000, or 3100-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 3**, climbing left turn to 4000 via heading 220° and PXR VORTAC R-336 southeast bound to PXR VORTAC. Thence...

Or, for climb in visual conditions: cross Scottsdale airport at or above 4500 MSL before proceeding on course. **Rwy 21**, climbing right turn to 4000 via heading 300° and PXR VORTAC R-336 northwest bound then left turn direct PXR VORTAC. Thence...

Or, for climb in visual conditions: cross Scottsdale airport at or above 4500 MSL before proceeding on course.

...continue climb on course.

NOTE: **Rwy 3**, multiple light standards beginning 63' from departure end of runway, 445' left of centerline, up to 44' AGL/1554' MSL. Hoist on dike 878' from departure end of runway, 735' left of centerline, 51' AGL/1561' MSL. Dike beginning 1066' from departure end of runway, 316' left of centerline, 38' AGL/1548' MSL. Day marker on dike 1230' from departure end of runway, 5' left of centerline, 39' AGL/1549' MSL. Tree, 269' from departure end of runway, 490' left of centerline, 13' AGL/1523' MSL. Tree 51' from departure end of runway, 279' left of centerline, 6' AGL/1516' MSL. Tree 765' from departure end of runway, 115' left of centerline, 22' AGL/1532' MSL. Road beginning 647' from departure end of runway, 296' left of centerline, 19' AGL/1529' MSL. Tree 227' from departure end of runway, 97' left of centerline, 6' AGL/1516' MSL. Fence beginning 5' from departure end of runway, 338' right of centerline, 6' AGL/1511' MSL. Light standard, 1013' from departure end of runway, 430' right of centerline, 44' AGL/1552' MSL. **Rwy 21**, tree 1072' from departure end of runway, 426' right of centerline, 53' AGL/1497' MSL. Building 316' from departure end of runway, 537' right of centerline, 23' AGL/1467' MSL. Tree 2087' from departure end of runway, 418' left of centerline, 61' AGL/1505' MSL. Tree 1432' from departure end of runway, 438' right of centerline, 38' MSL/1482' MSL. Tree 2234' from departure end of runway, 559' left of centerline, 58' AGL/1502' MSL.

SEDONA, AZ

SEDONA (SEZ)

AMDT 1 08101 (FAA)

TAKE-OFF MINIMUMS: **Rwy 3**, NA- Obstacles.

DEPARTURE PROCEDURE: **Rwy 21**, Use OATES RNAV DEPARTURE.

SHOW LOW, AZ

SHOW LOW RGNL

DEPARTURE PROCEDURE: **Rwys 3, 6**, turn left.

Rwys 21, 24, turn right. All aircraft climb via 345 bearing from SOW NDB to DEHOG INT then climb on course.

SPRINGERVILLE, AZ

SPRINGERVILLE MUNI

TAKE-OFF MINIMUMS: **Rwy 21**, 1000-2 or std. with a min. climb of 360' per NM to 8400.

DEPARTURE PROCEDURE: **Rwys 3, 11**, climbing left turn to 8400 via heading 360° before proceeding on course. **Rwys 21, 29**, climbing right turn to 8400 via 360° before proceeding on course.

TAYLOR, AZ

TAYLOR MUNI

TAKE-OFF MINIMUMS: **Rwy 21**, 300-1 or std. with a min. climb of 248' per NM to 6100.

DEPARTURE PROCEDURE: **Rwy 3/21**, climb on runway heading to 8000 before turning on course.

TONOPAH, NV

TONOPAH

TAKE-OFF MINIMUMS: **Rwys 11, 29**, NA. **Rwys 15, 33**, 2600-2 or std. with a min. climb of 260' per NM to 8000.

DEPARTURE PROCEDURE: **Rwy 15**, turn left. **Rwy 33**, turn right. Climb direct TPH VORTAC. Continue climb in holding pattern (NE, right turns, 246° inbound) to depart TPH VORTAC at or above 8000. Climb on course to MEA or assigned altitude.

TOOELE, UT

BOLINDER FIELD-TOOELE VALLEY

TAKE-OFF MINIMUMS: **Rwy 17**, std. with a min. climb of 490' per NM to 11000. **Rwy 35**, std. with a min. climb of 360' per NM to 9000.

DEPARTURE PROCEDURE: Use STACO DEPARTURE.

NOTE: **Rwy 17**, tree 794' from departure end of runway, 277' right of centerline, 35' AGL/4380' MSL. Tree 967' from departure end of runway, 432' right of centerline, 35' AGL/4394' MSL. Tree 1023' from departure end of runway, 313' right of centerline, 35' AGL/4395' MSL.

TUCSON, AZ

MARANA RGNL

TAKE-OFF MINIMUMS: **Rwys 3, 12**, N/A-Obstacles DEPARTURE PROCEDURE: **Rwy 21**, climb to 6500 via heading 360° and TUS R-308 to TOTEC Int/TUS 57 DME, then as filed. **Rwy 30**, climb to 6500 via heading 303° intercept TUS R-308 above 3500, to TOTEC INT/TUS 57 DME, then as filed.

NOTE: **Rwy 21**, road 192' from departure end of runway, 527' left of centerline 15' AGL/2034' MSL.

RYAN FIELD

DEPARTURE PROCEDURE: **Rwy 6R**, turn right; **Rwy 24L**, turn left direct to Ryan NDB. Continue climb in holding pattern (W, right turn 090° inbound) to 5000 before proceeding on course.

TUCSON, AZ (CON'T)

TUCSON INTL (TUS)

AMDT 4A 08241 (FAA)

TAKE-OFF MINIMUMS: **Rwy 3**, 300-1½ or std. w/ min. climb of 228' per NM to 3000.

DEPARTURE PROCEDURE: **Rwys 3, 29L, 29R**, climbing right turn direct to TUS VORTAC. **Rwys 11L, 11R** climb via runway heading to 4000 then climbing left turn direct TUS VORTAC. **Rwy 21**, climbing left turn direct to TUS VORTAC. **All aircraft** continue climbing in holding pattern (NW, right turns, 128° inbound) to depart TUS VORTAC at or above 9000.

NOTE: **Rwy 3**, tower 9215' from departure end of runway, 1689' left of centerline, 246' AGL/2831' MSL.

VERNAL, UT

VERNAL RGNL

TAKE-OFF MINIMUMS: **Rwy 16**, 1500-2 or std with a min. climb of 250' per NM to 7000'. **Rwy 25**, 1500-2 or std. with a min. climb of 390' per NM to 7000. **Rwy 34**, 1600-2 or std. with a min. climb of 330' per NM to 7000'.

DEPARTURE PROCEDURE: **Rwys 7, 34**, turn right. **Rwys 16, 25**, turn left. **All aircraft** climb direct VEL. Aircraft departing V391 S-bound climb on course. All others climb in holding pattern (SE, right turns, 322° inbound). Aircraft SW-bound V208 depart VEL at or above 8400', all others depart VEL at or above 9500'. Continue climb on course to MEA or assigned altitude.

WENDOVER, UT

WENDOVER

TAKE-OFF MINIMUMS: **Rwy 26**, standard with a min. climb of 300' per NM to 7000. **Rwy 30**, NA.

DEPARTURE PROCEDURE: **Rwys 8, 12, 26**, climbing left turn direct BVL VORTAC. Aircraft departing BVL VORTAC R-330 CW R-150 climb on course. All others continue climb in BVL VORTAC holding pattern (Hold NE right turns, 247° inbound) to cross at or above 7400, then climb on course.

WILLCOX, AZ

COCHISE COUNTY

DEPARTURE PROCEDURE: **Rwy 3**, turn right. **Rwy 21**, turn left. **All aircraft** climb direct CIE VORTAC.

WINDOW ROCK, AZ

WINDOW ROCK

TAKE-OFF MINIMUMS: **Rwy 2**, 700-2 or std. with a min. climb of 500' per NM to 8000. **Rwy 20**, 600-2 or std. with a min. climb of 260' per NM to 8200.

DEPARTURE PROCEDURE: **Rwy 2**, turn right.

Rwy 20, turn left direct to GUP VORTAC before proceeding on course.

NOTE: **Rwy 2**, terrain 3832' from departure end of runway, 1025' right of centerline, 6926' MSL. Poles 5220' from departure end of runway, 245' right of centerline, 180' AGL/6922' MSL. Tower 7067' from departure end of runway, 3072' left of centerline, 71' AGL/7316' MSL. Terrain 7449' from departure end of runway, 1612' left of centerline, 6991' MSL. Terrain 8776' from departure end of runway, 1851' left of centerline, 7109' MSL. Tree 9665' from departure end of runway, 1326' right of centerline, 7340' MSL. Tree 11326' from departure end of runway, 355' left of centerline, 7351' MSL. **Rwy 20**, trees 1018' from departure end of runway, 620' left of centerline, 30' AGL/6768' MSL.

WINNEMUCCA, NV

WINNEMUCCA MUNI

TAKE-OFF MINIMUMS: **Rwy 2**, 2500-2 or std. with a min. climb of 450' per NM to 6800. **Rwys 14,20**, 3200-2 or std. with a min. climb of 520' per NM to 7500.

DEPARTURE PROCEDURE: **Rwys 14,20**, turn right.

Rwy 2, turn left. **Rwy 32**, climb straight ahead. All aircraft climb via INA R-326 to 6700 or above within 12 NM, then climbing left turn return to INA VOR/DME via R-326. Continue climb in INA VOR/DME holding pattern (hold NW, right turns, 146° inbound) to depart INA VOR/DME at or above 11000. Southbound aircraft continue via INA R-146 direct Fesko Int. Northbound aircraft continue via INA R-326 and SDO R-144 direct SDO VORTAC.

YUMA MCAS/ YUMA INTL(KNYL)

YUMA, AZ 09323

Diverse departures not auth between 360° CW 055° from 25 NM to 30 NM.

Rwy 3L: Cross DER at or above 35' AGL/228' MSL. Diverse departures auth. Fr 083° CW 107°, std with minimum climb of 225'/NM to 3500'.

Rwy 3R: Cross DER at or above 35' AGL/242' MSL. Diverse departures auth. Fr 083° CW 107°, std with minimum climb of 225'/NM to 3500'.

Rwy 21L: Cross DER at or above 35' AGL/223' MSL. Diverse departures auth.

Rwy 21R: Cross DER at or above 35' AGL/227' MSL. Diverse departures auth.

Rwy 8: Cross DER at or above 35' AGL/231' MSL. Diverse departures auth. Fr 069° CW 123°, std with minimum climb of 230'/NM to 3500'.

Rwy 26: Cross DER at or above 35' AGL/230' MSL. Diverse departures auth.

Rwy 17: Cross DER at or above 35' AGL/217' MSL. Diverse departures auth. Fr 068° CW 109°, std with minimum climb of 220'/NM to 3500'.




Rwy 35: Cross DER at or above 35' AGL/231' MSL. Diverse departures auth.

APP CRS	Rwy Idg
067°	TDZE
	Apt Elev
	N/A
	5860

NA DME/DME RNP-0.3 NA.
If local altimeter setting not received, use Milford Muni altimeter setting and increase all MDAs 180 feet.

MISSED APPROACH: Climbing left turn to 9600 direct VOGUY and hold.

AWOS-3 119.925	SALT LAKE CITY CENTER 125.575 379.275	CTAF 122.9 0
-------------------	--	-----------------

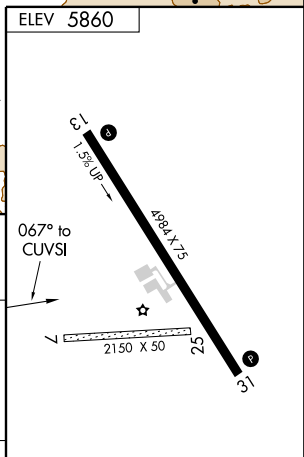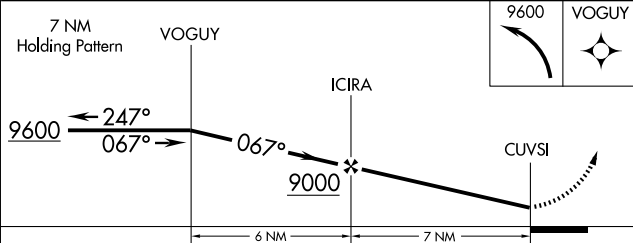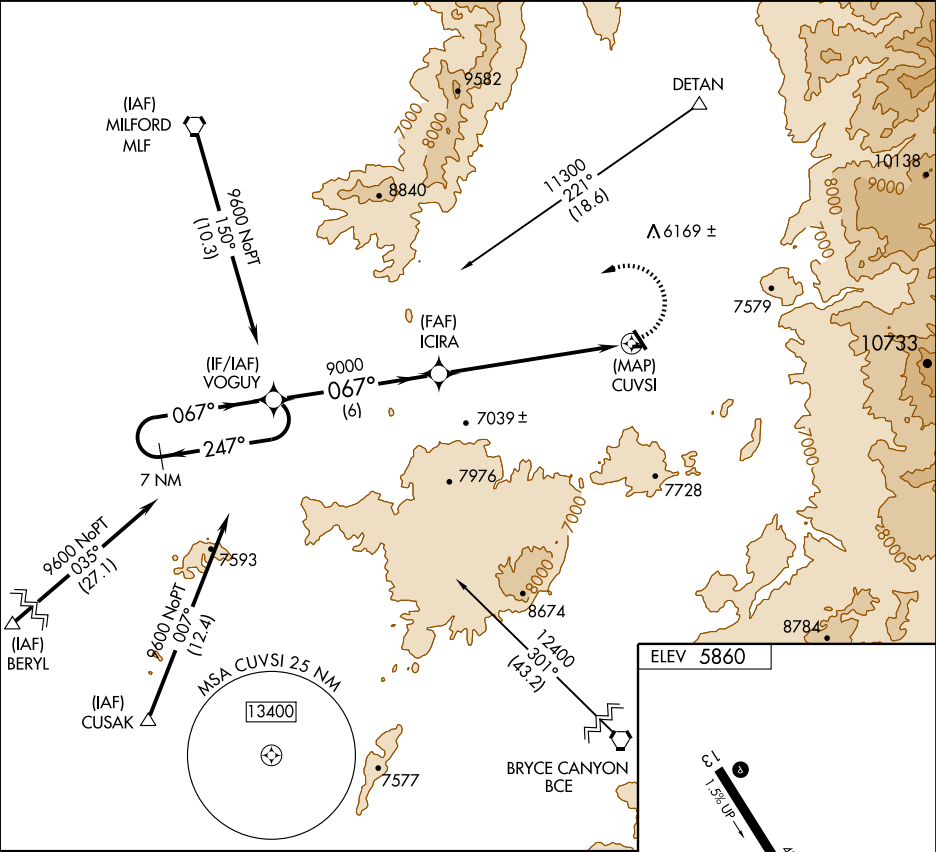

CATEGORY	A	B	C	D
CIRCLING	7080-1¼ 1220 (1300-1¼)	7080-1½ 1220 (1300-1½)	7080-3 1220 (1300-3)	NA

MRL Rwy 13-31 0
REIL Rwy 13 and 31 0

APP CRS	Rwy Idg	5781
348°	TDZE	5814
	Apt Elev	5865




RNAV (GPS) RWY 35

BLANDING MUNI (BDG)

NA GPS or RNP-0.3 required. DME/DME RNP-0.3 NA.
If local altimeter setting not received, use Cortez altimeter setting and increase all MDAs 120 feet.

MISSED APPROACH: Climbing right turn to 9200 direct GERRO WP and hold.

AWOS-3 127.75	DENVER CENTER 127.55 343.95	UNICOM 122.8 (CTAF) 0
------------------	--------------------------------	--------------------------

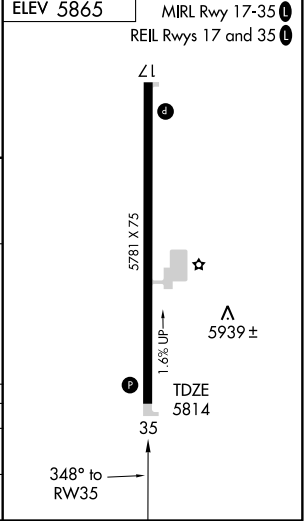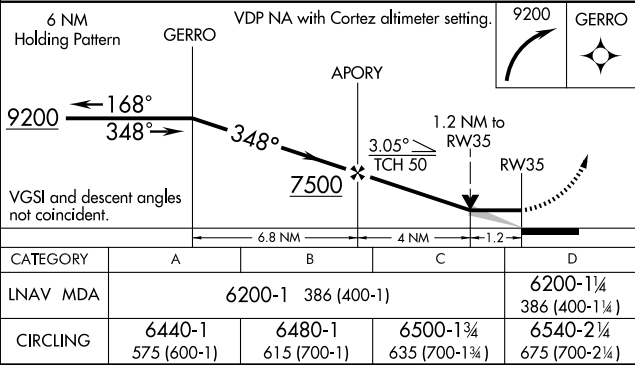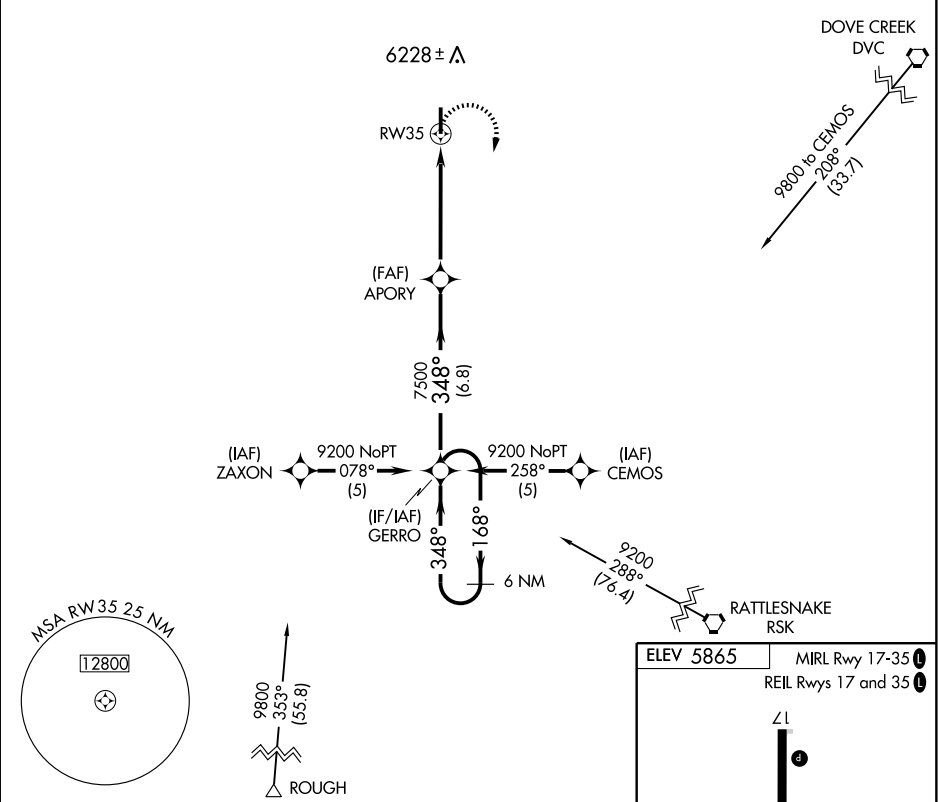

NDB BMC
294

APP CR
009°Rwy Idg
TDZE
Asp Elev

N/A
N/A
4220

NDB-A
BRIGHAM CITY (BMC)

T When local altimeter setting not received, use
A **NA** Ogden-Hinckley altimeter setting and increase all MDA
100 feet and Cat C visibility $\frac{1}{4}$ mile.


MISSED APPROACH: Climbing left turn to 7000 via heading 160° and BMC NDB 189° bearing to KONNE Int and left turn via OGD R-281 to OGD VORTAC and hold.

AWOS-3
135.075



SALT LAKE CITY APP CON
121.1 319.25

CLNC DEL
126.0

UNICOM
123.05 (CTAF) 

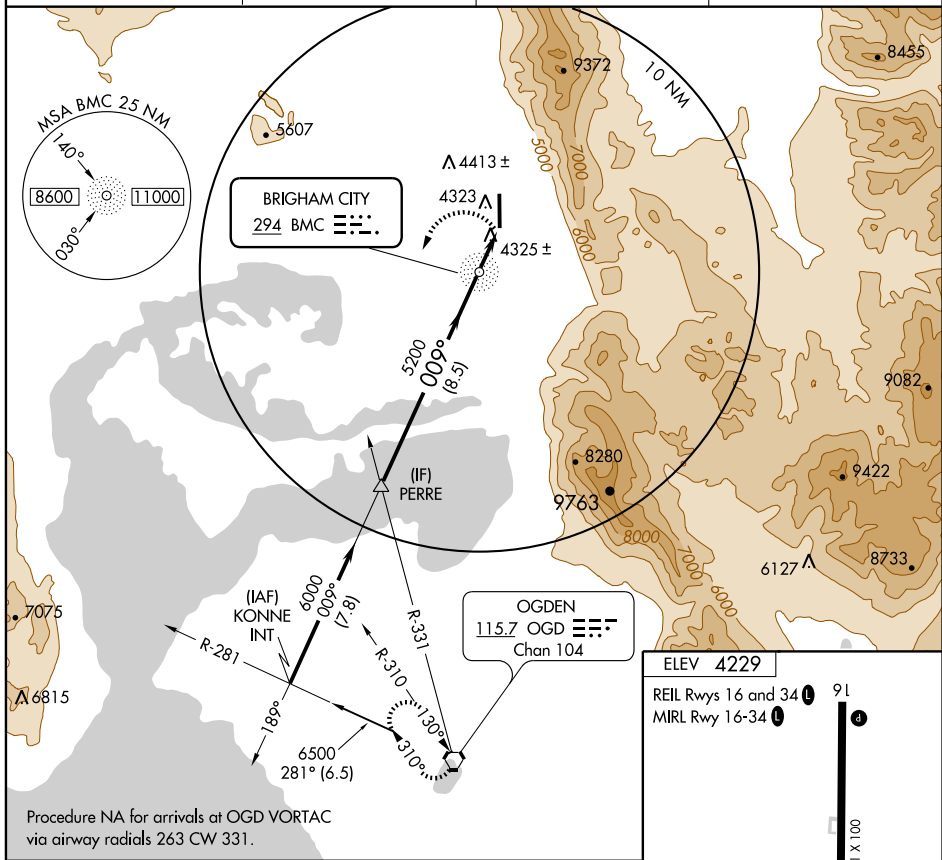

Procedure NA for arrivals at OGD VORTAC
via airway radials 263 CW 331.

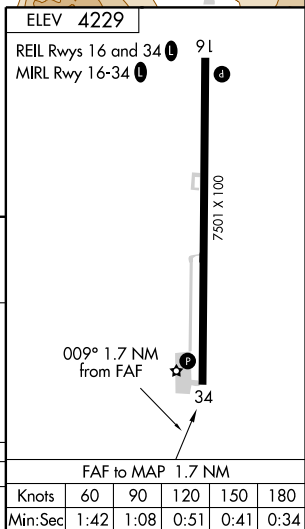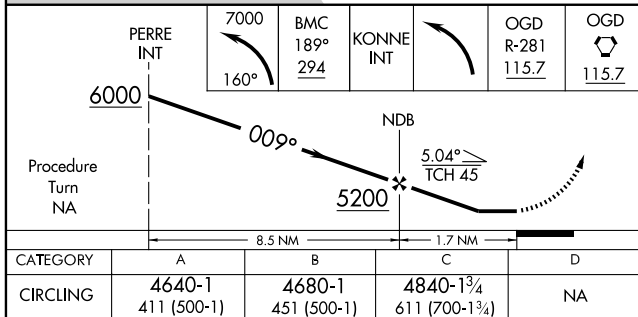

APP CRS	Rwy Idg	7501
356°	TDZE	4229
	Apt Elev	4229


RNAV (GPS) RWY 34

BRIGHAM CITY (BMC)

NA If local altimeter setting not received, use Ogden altimeter setting and increase all MDAs 100 feet.
DME/DME RNP-0.3 NA.
VDP NA when using Ogden altimeter setting.


MISSED APPROACH: Climbing left turn to 7100 direct KONNE and hold.

AWOS-3 135.075	SALT LAKE CITY APP CON 121.1 319.25	CLNC DEL 126.0	UNICOM 123.05 (CTAF)
--------------------------	---	--------------------------	--------------------------------

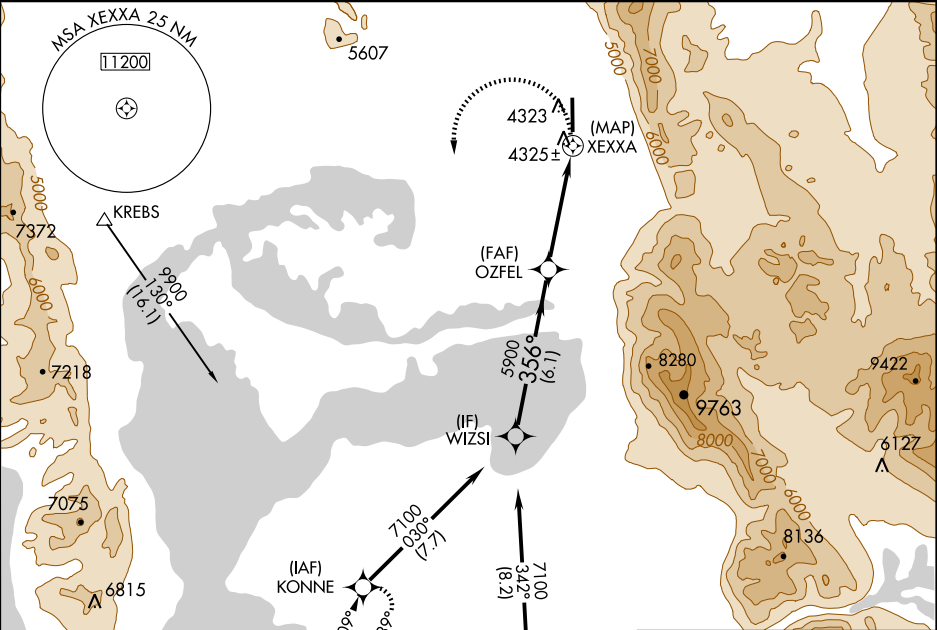


ELEV 4229

Procedure NA for arrivals at OGD VORTAC via V21 southeast bound.

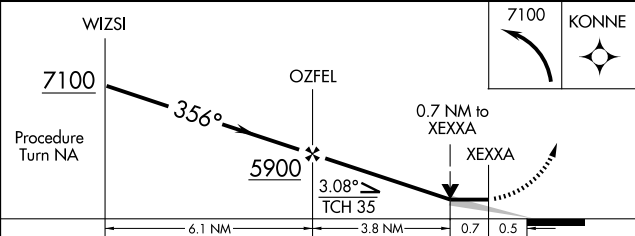

CATEGORY	A	B	C	D
LNAV MDA	4640-1	411 (500-1)	4640-1¼ 411 (500-1¼)	NA
CIRCLING	4640-1 411 (500-1)	4680-1 451 (500-1)	4840-1¾ 611 (700-1¾)	NA

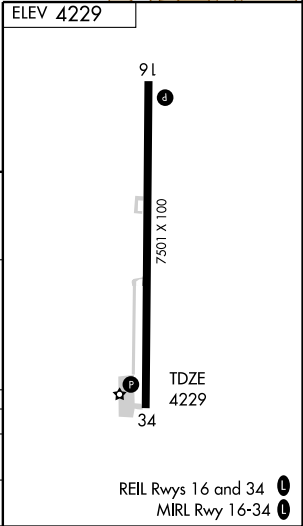

LOC I-ECC 110.1	APP CRS 200°	Rwy Idg TDZE Apt Elev	8653 5600 5622
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 20



CEDAR CITY RGNL (CDC)

⚠ Circling not authorized east of Rwy 2-20.



MISSED APPROACH: Climb to 6100, then climbing right turn to 9500 via heading 322° and CDC VOR/DME R-278 to BERYL Int/16.5 DME and hold.

ASOS 119.025	CEDAR CITY RADIO 122.6 255.4	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

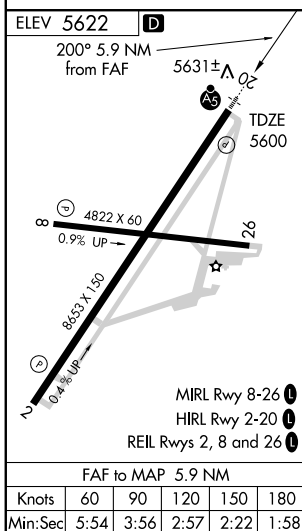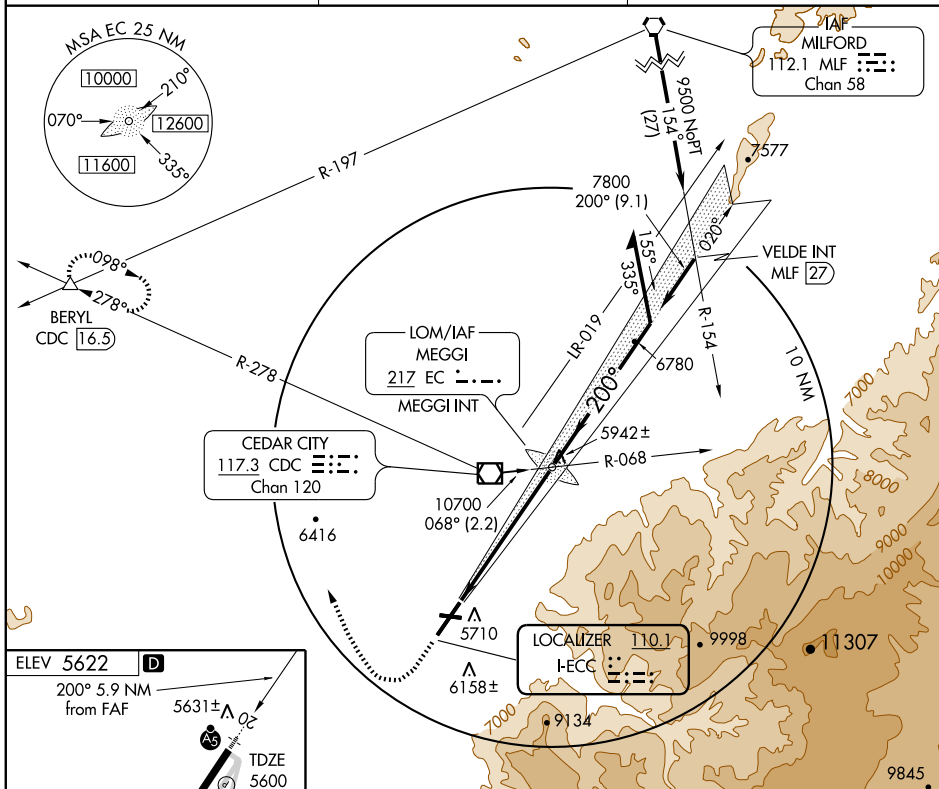

6100	9500	CDC R-278 117.3	BERYL △	LOM/INT*	Remain within 10 NM
↑	↪	322°			
*Maintain 10700 or above until established outbound for Procedure Turn.					
5.9 NM					
CATEGORY	A	B	C	D	
S-ILS 20	5800-½ 200 (200-½)				
S-LOC 20	5960-½ 360 (400-½)				5960-¾ 360 (400-¾)
CIRCLING	5980-1 358 (400-1)	6080-1 458 (500-1)	6080-1½ 458 (500-1½)	6440-2¾ 818 (900-2¾)	

RNAV (GPS) RWY 20

CEDAR CITY RGNL (CDC)

APP CRS **200°**
Rwy Idg **8653**
TDZE **5600**
Apt Elev **5622**

NA GPS or RNP-0.3 required. DME/DME RNP-0.3 NA.
Baro-VNAV NA below -26° C (-15° F)
Circling not authorized east of Rwy 2-20.
IAF ARM APPROACH MODE PRIOR TO IAF.

MALSR






MISSED APPROACH: Climb to 9500 via 200° course to ZUMAS WP then via 306° course to BERYL WP and hold.

ASOS
119.025

CEDAR CITY RADIO
122.6 255.4

UNICOM
123.0 (CTAF) 1

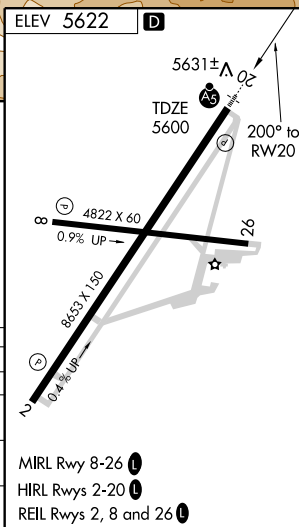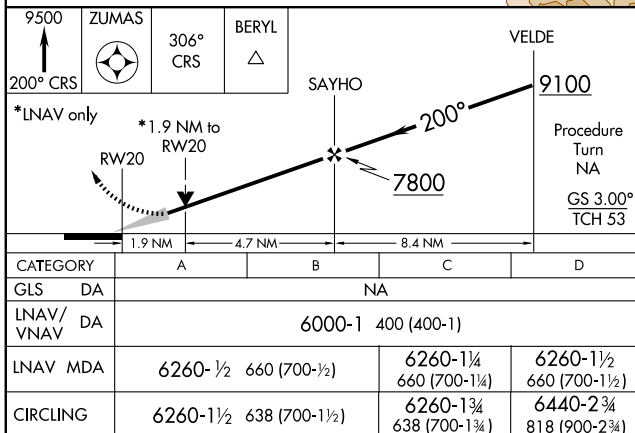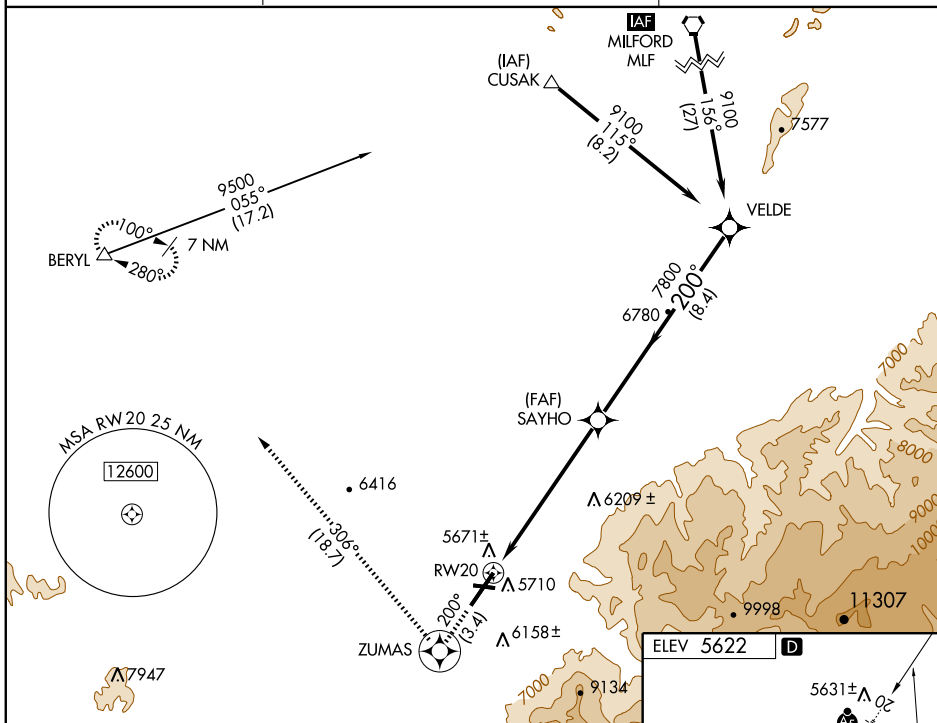




MIRL Rwy 8-26 **1**
HIRL Rwy 2-20 **1**
REIL Rwy 2, 8 and 26 **1**

Cirding not authorized east of Rwy 2-20.
Inoperative table does not apply.

MALS

MISSED APPROACH: Climbing right turn to 9500
via 322° heading and CDC R-278 to BERYL INT/
CDC 16.5 DME and hold.

ASOS 119.025	CEDAR CITY RADIO 122.6 255.4	UNICOM 123.0 (CTAF) 0
-----------------	---------------------------------	--------------------------

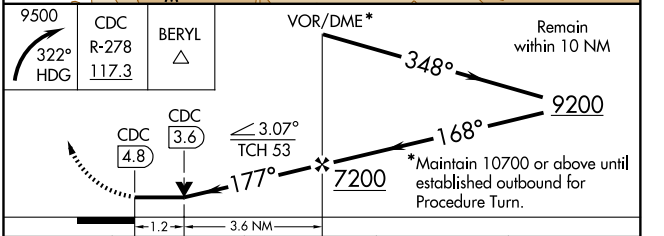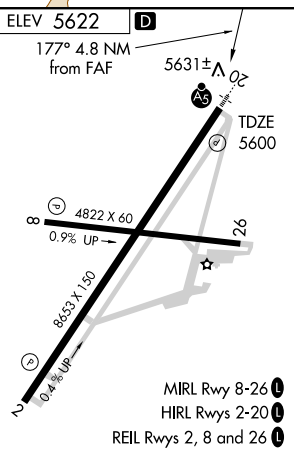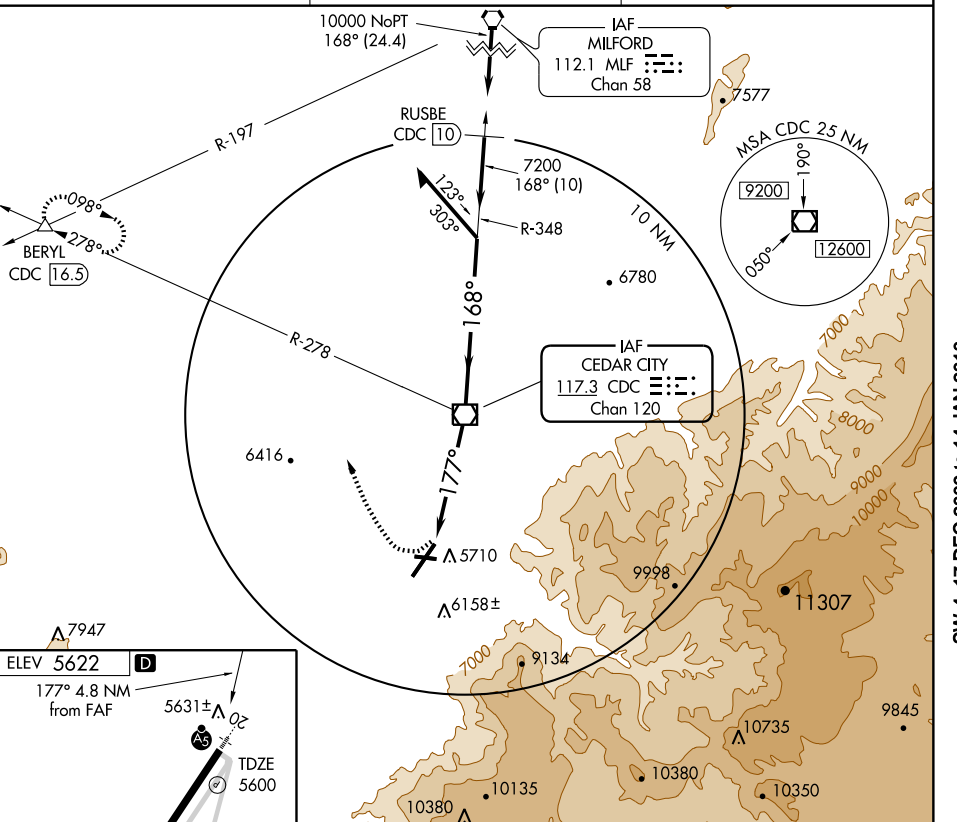

CATEGORY	A	B	C	D
S-20	6020-1 420 (400-1)		6020-1¼ 420 (400-1¼)	
CIRCLING	6020-1 398 (400-1)	6080-1 458 (500-1)	6080-1½ 458 (500-1½)	6440-2¾ 818 (900-2¾)

FAF to MAP 4.8 NM					
Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

APP CRS	Rwy Idg	5500
166°	TDZE	4759
	Apt Elev	4759



RNAV (GPS) RWY 17

DELTA MUNI (DTA)

⚠ DME/DME RNP-0.3 NA. Circling to Rwy 30 NA at night. **⚠** MISSED APPROACH: Climb to 12000 direct TAVTE and via 173° track to JULIK and hold, continue climb-in-hold to 12000.

⚠ NA If local altimeter setting not received, procedure NA.

AWOS-3 127.75	CEDAR CITY RADIO 122.1R	UNICOM 122.8 (CTAF) 📻
------------------	----------------------------	---------------------------------

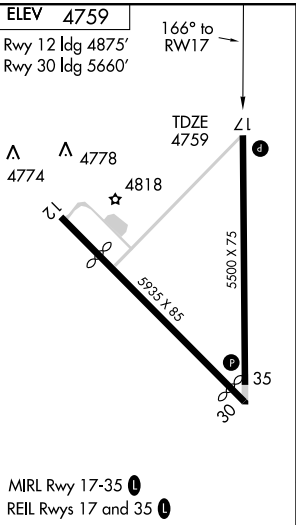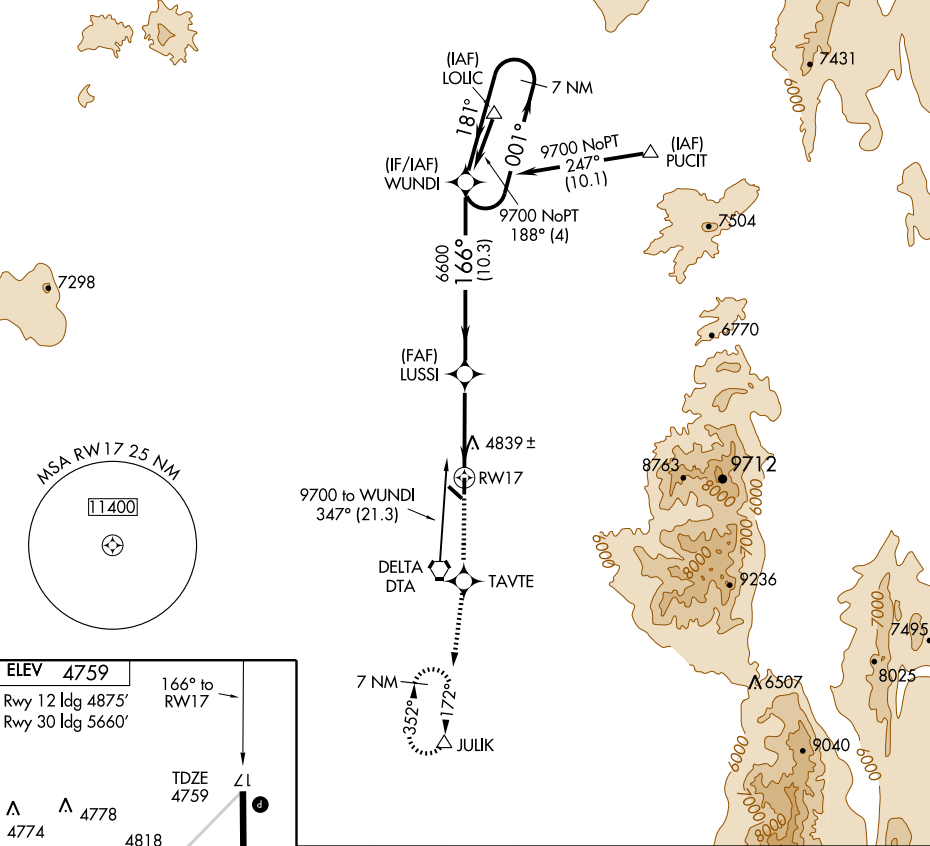

12000	TAVTE	173° track	JULIK	WUNDI	7 NM Holding Pattern
					001° → 9700 ← 181°
					VGSI and descent angles not coincident.
CATEGORY	A	B	C	D	
LNAV MDA	5100-1 341 (400-1)				
CIRCLING	5140-1 381 (400-1)	5220-1 461 (500-1)	5220-1½ 461 (500-1½)	5320-2 561 (600-2)	


APP CRS	Rwy Idg	5500
346°	TDZE	4758
	Apt Elev	4759

RNAV (GPS) RWY 35


DELTA MUNI (DTA)

DME/DME RNP-0.3 NA. NA Circling to Rwy 30 NA at night. If local altimeter setting not received, procedure NA.	MISSED APPROACH: Climb to 11000 direct ILACE and via 352° track to WADOK and hold, continue climb-in-hold to 11000.
---	---

AWOS-3 127.75	CEDAR CITY RADIO 122.1R	UNICOM 122.8 (CTAF)
------------------	----------------------------	------------------------

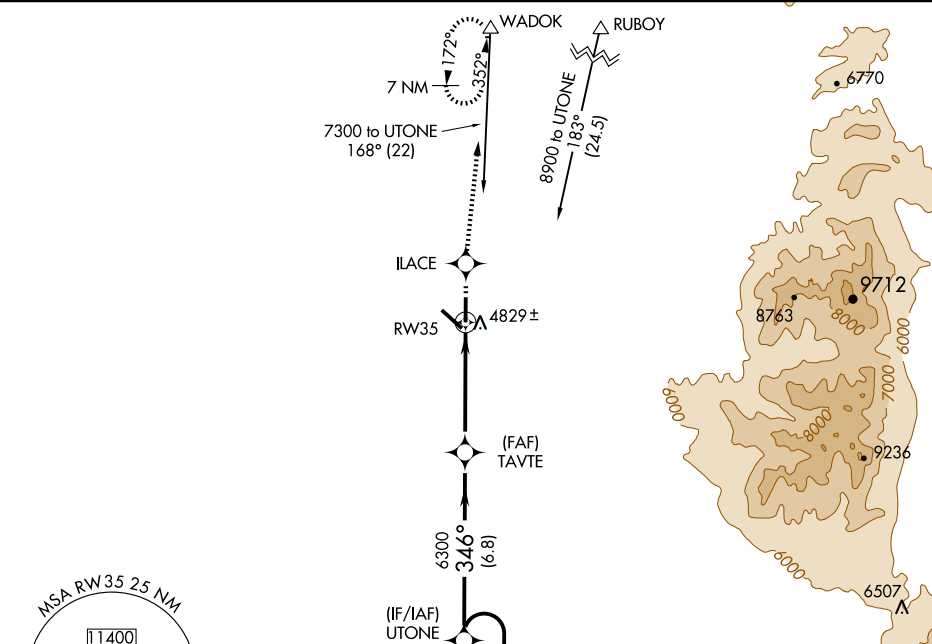

6 NM Holding Pattern UTONE				
CATEGORY	A	B	C	D
LNAV MDA	5080-1 322 (400-1)			
CIRCLING	5140-1 381 (400-1)	5220-1 461 (500-1)	5220-1½ 461 (500-1½)	5320-2 561 (600-2)

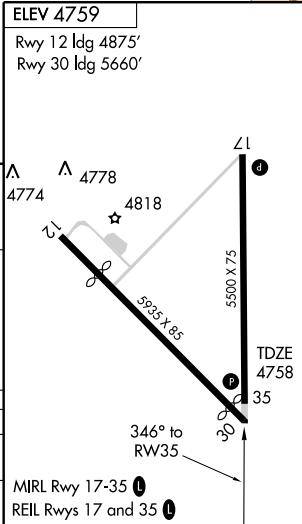

VORTAC DTA	APP CRS	Rwy Idg	5500
116.1	166°	TDZE	4759
Chan 108		Apt Elev	4759




▼

NA

Circling to Rwy 30 NA at night.
If local altimeter setting not received, procedure NA.

MISSED APPROACH: Climb to 9600 via DTA VORTAC R-346 and R-166 to DUDE/5 DME and climbing right turn via DTA VORTAC R-204 to DTA VORTAC and hold, continue climb-in-hold to 9600.

AWOS-3 127.75	CEDAR CITY RADIO 122.1R	UNICOM 122.8 (CTAF) 0
------------------	----------------------------	--------------------------

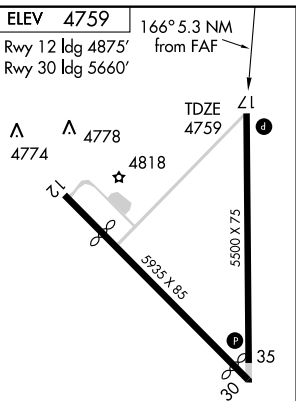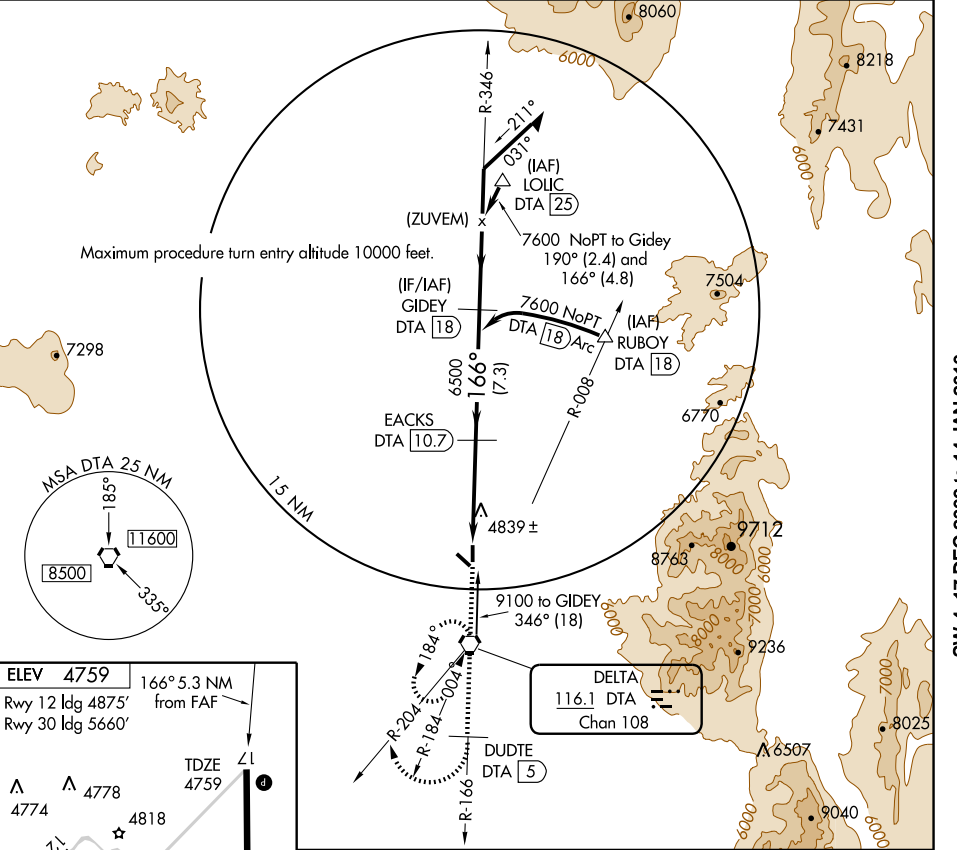

Knots	60	90	120	150	180
Min:Sec					
CATEGORY	S-17				
CIRCLING	5100-1 341 (400-1)				
	5140-1 381 (400-1)	5220-1 461 (500-1)	5220-1½ 461 (500-1½)	5320-2 561 (600-2)	

VORTAC DTA <u>116.1</u> Chan 108	APP CRS 346°	Rwy Idg 5500 TDZE 4758 Apt Elev 4759
--	------------------------	---

VOR RWY 35
DELTA MUNI (DTA)


T	Circling to Rwy 30 NA at night.
A NA	If local altimeter setting not received, procedure, NA.

MISSED APPROACH: Climbing right turn to 9600 direct DTA VORTAC and hold, continue climb-in-hold to 9600.


AWOS-3
127.75

CEDAR CITY RADIO
122.1R


UNICOM
122.8 (CTAF) **L**

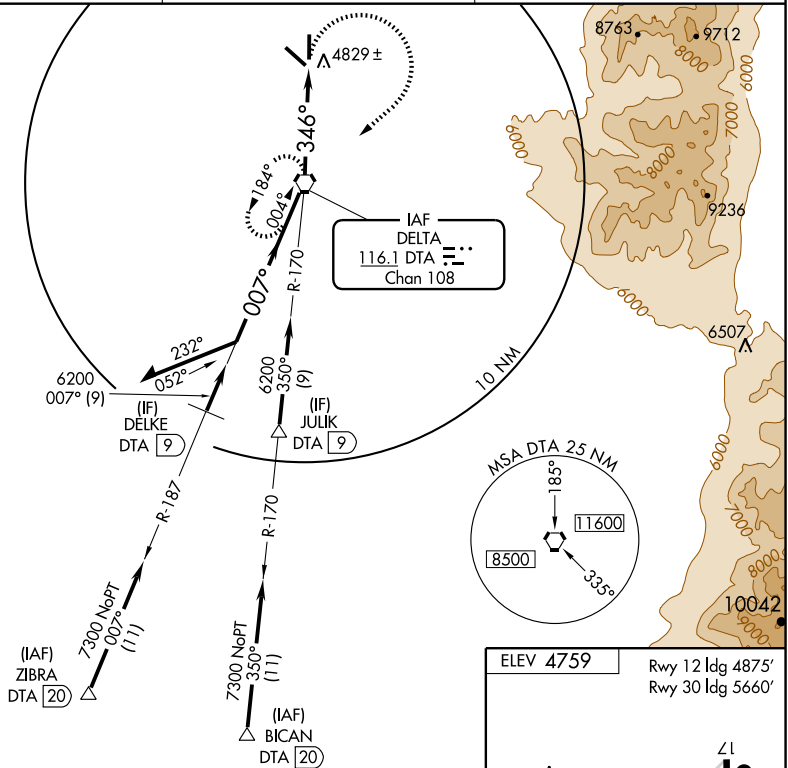

SW-4. 17 DEC 2009 to 14 JAN 2010

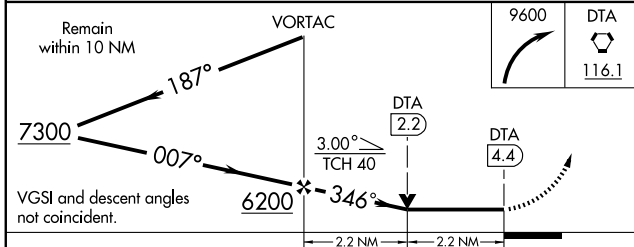

CATEGORY	A	B	C	D
S-35	5500-1 742 (800-1)	5500-1¼ 742 (800-1¼)	5500-2¼ 742 (800-2¼)	5500-2½ 742 (800-2½)
CIRCLING	5500-1 741 (800-1)	5500-1¼ 741 (800-1¼)	5500-2¼ 741 (800-2¼)	5500-2½ 741 (800-2½)

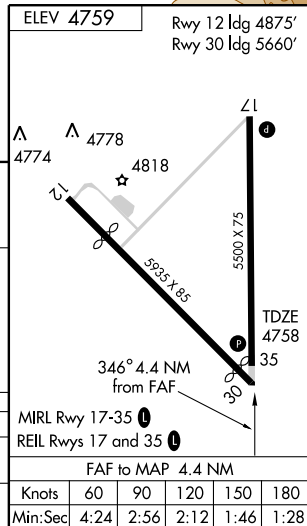

CLOVER CONTROL SOUTH
134.1 363.5
CTAF
126.2 270.3

40°13'N

40°12'N

40°11'N

12

112°57'W

DECONTAMINATION PAD
450 x 250

B

B2

B

112°56'W

11,000 x 150

E-5

B

B

B

FIELD
ELEV
4350

30

CONTROL
TOWER
4435

Rwy 12 ldg 10,000'
Rwy 30 ldg 10,000'

RWY 12-30
PCN 73 R/B/W/T



APRIL 2008
ANNUAL RATE OF CHANGE
0.1° W



SW-4, 17 DEC 2009 to 14 JAN 2010

NDB DPG 284	APCH CRS 080°	Rwy Idg 10,000 TDZE N/A Arprt Elev 4350
-----------------------	-------------------------	--

AL-5071 [USA]

MICHAEL AAF (KDPG)

▽ * Obtain local altimeter setting on CTAF; when not received, use Wendover altimeter setting.


▲ NA

MISSED APPROACH: Climbing left turn to 6500 in DPG NDB holding pattern.


CLOVER CON
134.1 363.5

CTAF
126.2 0 270.3

Procedure lies within restricted areas, PPR.
Limit final and missed approach
airspeed to 90 KIAS.

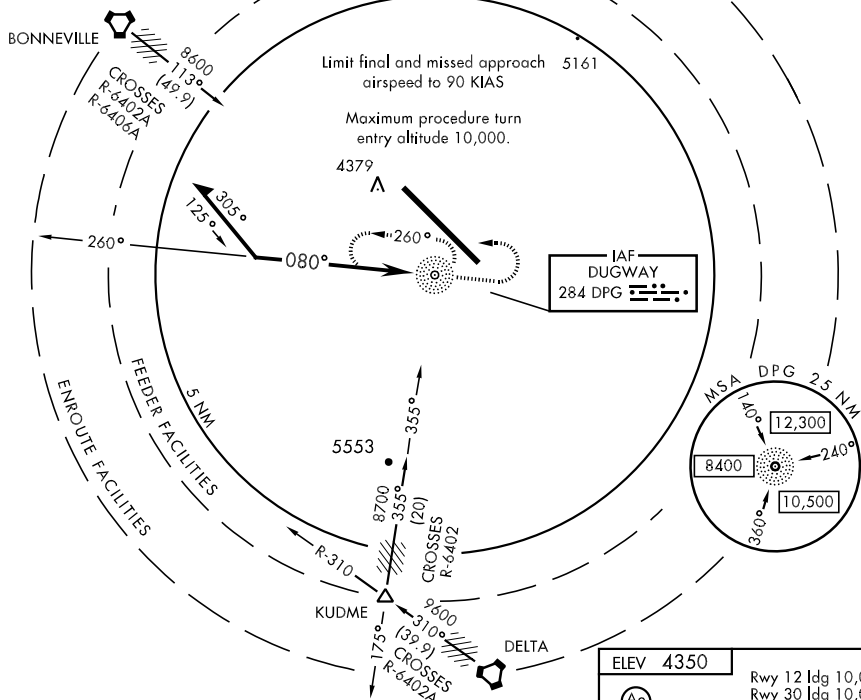

Remain
within 5 NM
of DPG NDB



CATEGORY

COPTER

H-080°

5160-1 809 (900-1)


* WENDOVER ALTIMETER SETTING MINIMUMS

H-080°

5320-1 969 (1000-1)

ELEV 4350

Rwy 12 Idg 10,000'
Rwy 30 Idg 10,000'

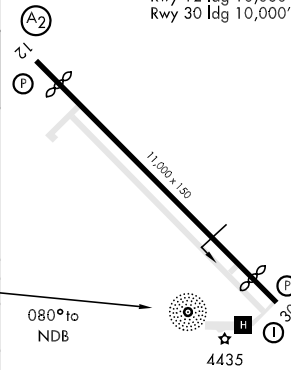

NDB DPG
284APCH CRS
082°Rwy Idg 10,000
TDZE N/A
Arpt Elev 4350

AL-5071 [USA]

MICHAEL AAF (KDPG)


▼ * Obtain local altimeter setting on CTAF; when not received, use Wendover altimeter setting.

▲ NA



MISSED APPROACH: Climbing left turn to 8300 in DPG NDB holding pattern.

CLOVER CON
134.1 363.5


CTAF
126.2 270.3

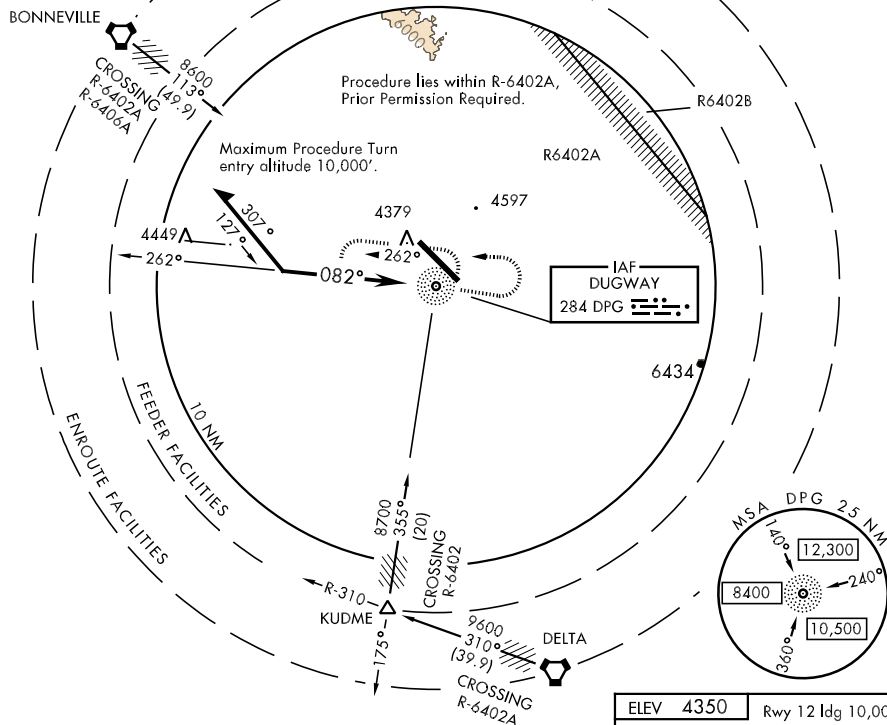

Remain
within 10 NM
of DPG NDB



ELEV 4350 Rwy 12 Idg 10,000'
Rwy 30 Idg 10,000'

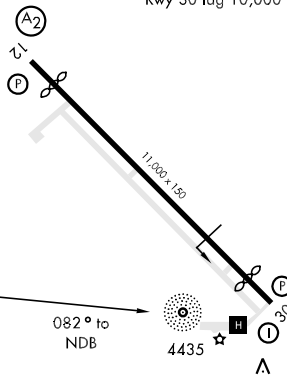

CATEGORY	A	B	C	D
CIRCLING	6000-1¼ 1649 (1700-1¼)	6000-1½ 1649 (1700-1½)	6000-3 1649 (1700-3)	
* WENDOVER ALTIMETER SETTING MINIMUMS				
CIRCLING	6160-1¼ 1809 (1900-1¼)	6160-1½ 1809 (1900-1½)	6160-3 1809 (1900-3)	

APCH CRS	Rwy Idg	10,000
122°	TDZE	4342
	Arpt Elev	4350

AL-5071 [USA]

MICHAEL AAF (KDPG)



* Obtain local altimeter setting on CTAF; when not received, use Wendover altimeter setting.

SALSF



MISSED APPROACH: Climbing right turn to 8000 direct GOYVE and hold.


CLOVER CON
134.1 363.5

CTAF
126.2 270.3


Procedure lies within R-6402A, PPR.

DME/DME RNP-0.3 NA.

Procedure NA for arrivals on DTA VORTAC
airways radials R-348 CW R-008.

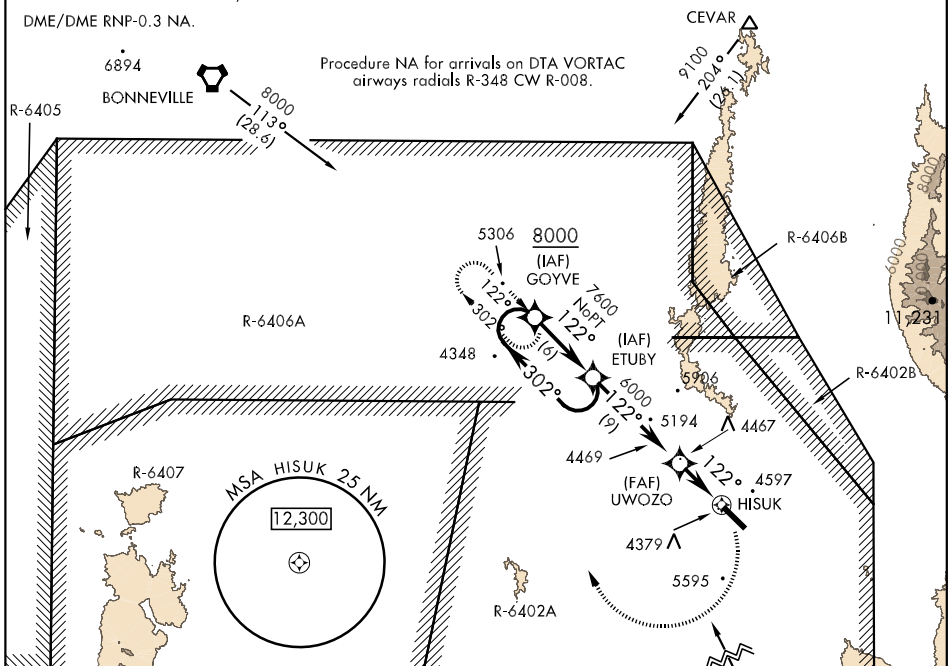


VGSI and descent angles
not coincident

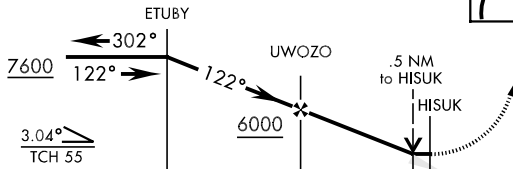VDP NA with Wendover
altimeter setting minimums.

CATEGORY	A	B	C	D	E
RNAV MDA	4820-1 478 (500-1)		4820-1½ 478 (500-1½)	4820-1½ 478 (500-1½)	5120-2¾ 778 (800-2¾)
CIRCLING	4820-1 469 (500-1)		4820-1½ 469 (500-1½)	4920-2 569 (600-2)	5900-3 1549 (1600-3)
* WENDOVER ALTIMETER SETTING MINIMUMS					
RNAV MDA	4980-1 638 (700-1)		4980-1¾ 638 (700-1¾)	4980-2 638 (700-2)	5280-3 938 (1000-3)
CIRCLING	4980-1 629 (700-1)		4980-1¾ 629 (700-1¾)	5060-2½ 709 (800-2½)	6060-3 1709 (1800-3)

ELEV 4350	Rwy 12 Idg 10,000'
	Rwy 30 Idg 10,000'



TACAN Chan 79	MIJ 117°	APCH CRS 117°	Rwy Idg 10,000' TDZE 4342 Arpt Elev 4350
-------------------------	--------------------	-------------------------	---

AL-5071 [USA]

MICHAEL AAF (KDPG)

V * Obtain local altimeter setting on CTAF; when not received, use Wendover altimeter setting.



A NA

SALSF
(A2)

MISSED APPROACH: Climbing right turn to 8800 via MIJ TACAN R-297 to POISN/23 DME and hold.

CLOVER CON
134.1 363.5

CTAF
126.2 0 270.3

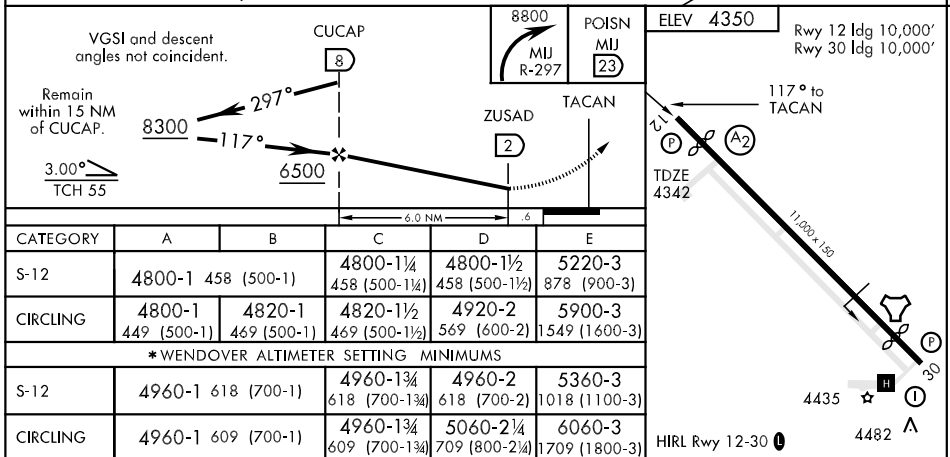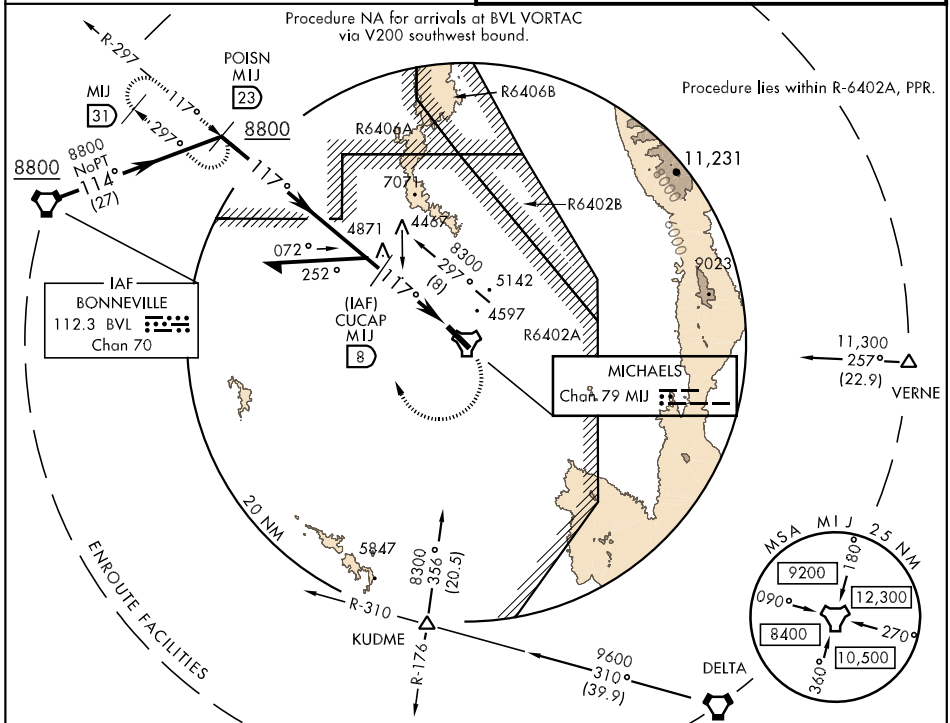

TACAN Chan 79	MIJ 117°	APCH CRS 117°	Rwy ldg 10,000 TDZE 4342 Arpt Elev 4350
-------------------------	--------------------	-------------------------	--

AL-5071 [USA]

MICHAEL AAF (KDPG)

▼ * Obtain local altimeter setting on CTAF; when not received, use Wendover altimeter setting.

▲ NA


SALSF

(A2)


† MISSED APPROACH: Climbing right turn to 8800 via MIJ TACAN R-297 to POISN/23 DME and hold.

CLOVER CON
134.1 363.5


CTAF
126.2 270.3

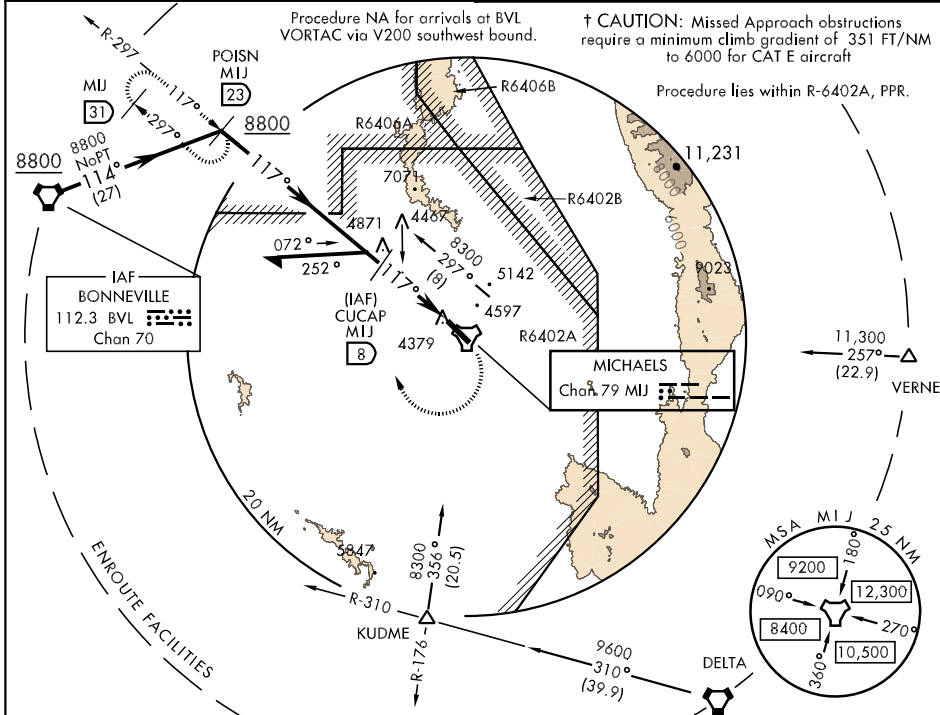

SW-4, 17 DEC 2009 to 14 JAN 2010

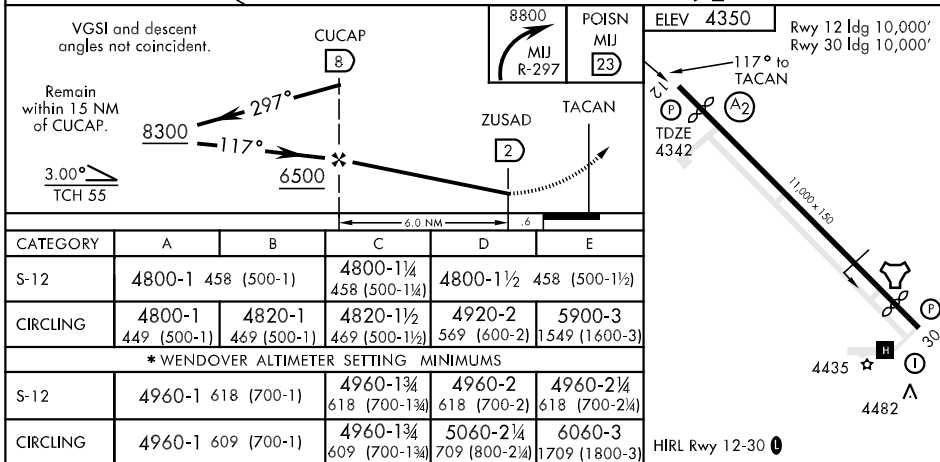

SALT LAKE CITY CENTER
119.95 377.15
CTAF 122.8
AWOS-3 124.825

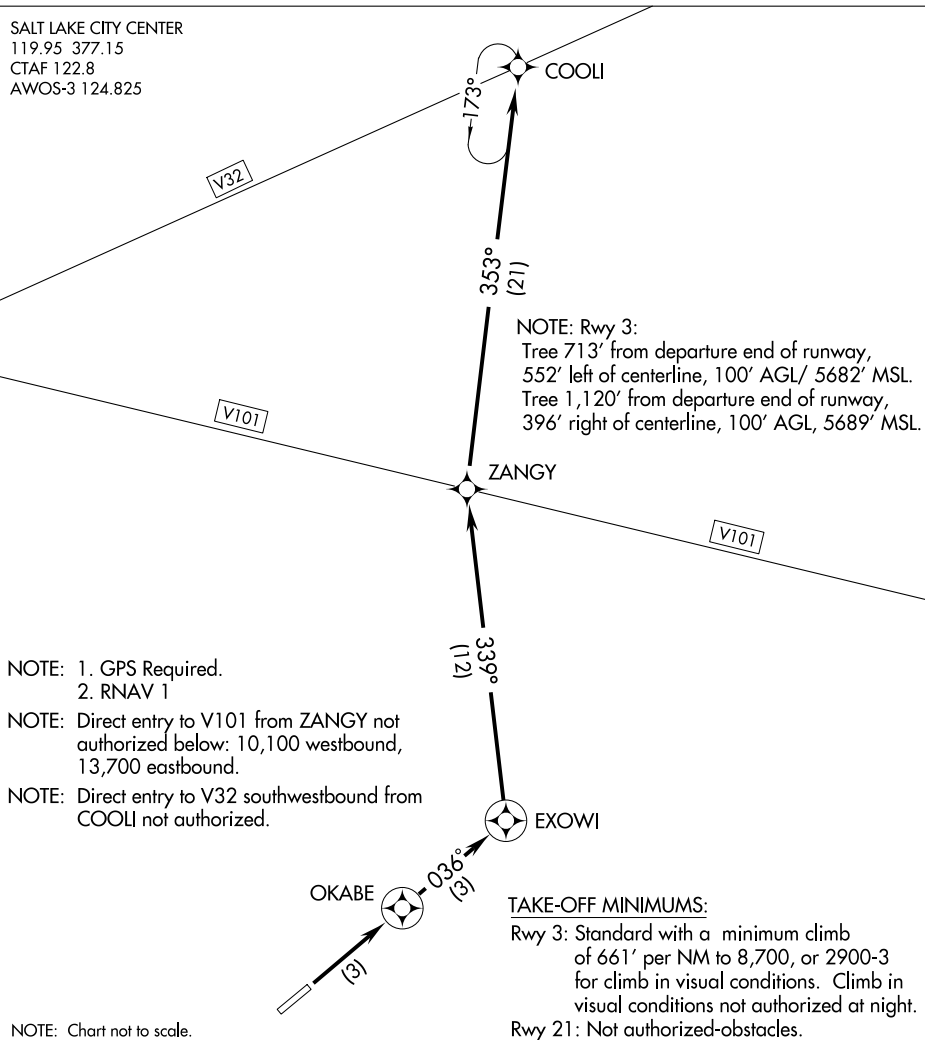

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 3: Climb to 12,000 (or assigned altitude) direct OKABE and 036° track to EXOWI, Then via depicted route to COOLI, thence...

or climb in visual conditions to cross departure end of runway northeastbound at or above 8,400 direct OKABE and 036° track to EXOWI, then via depicted route to COOLI, thence...

....climb in holding (if required) at COOLI before proceeding via assigned route.

▼



▲

Use Carbon County Rgnl/Buck Davis Field altimeter setting; when not received, procedure not authorized. Circling not authorized at night to Rwy 18, 36, 12, and 30.

MISSED APPROACH: Climbing left turn to 10000 via PUC VOR/DME R-183 to PUC VOR/DME and hold.

SALT LAKE CENTER
133.9 370.85

UNICOM
122.8 (CTAF) 1

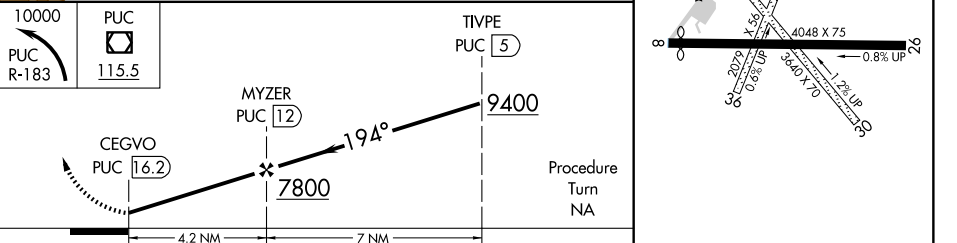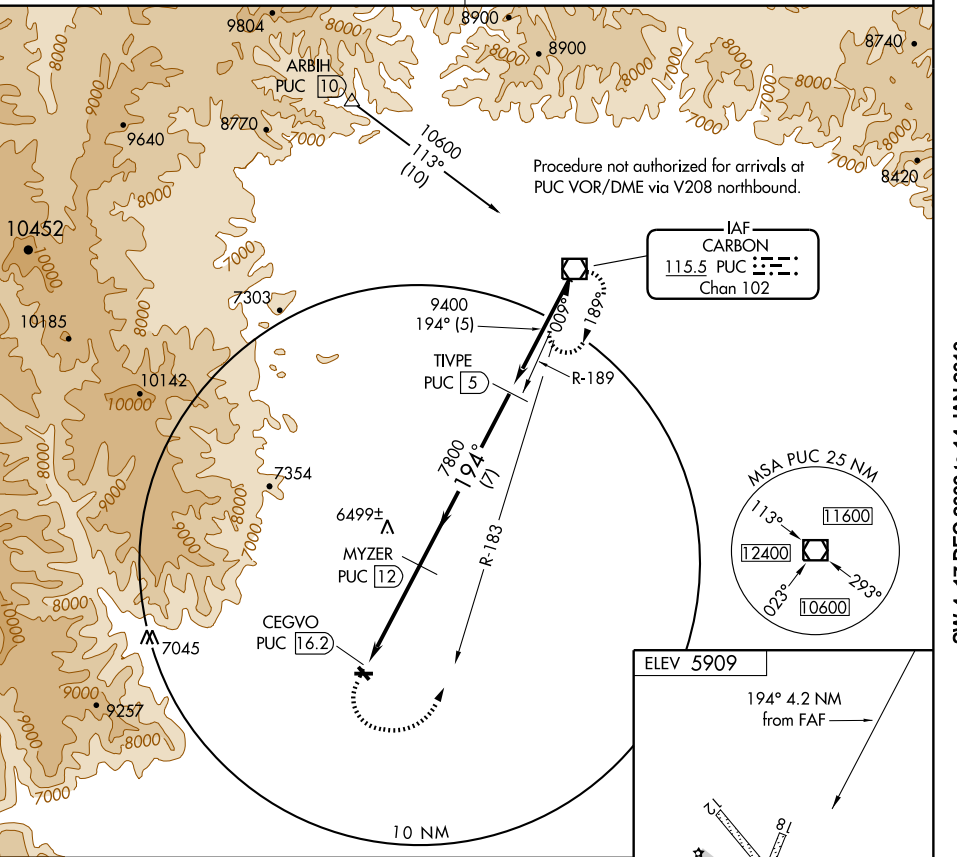


CATEGORY	A	B	C	D
CIRCLING	6620-1 711 (800-1)		6620-2 711 (800-2)	NA

MIRL Rwy 8-26 1

SW-4, 17 DEC 2009 to 14 JAN 2010

LOS ANGELES CENTER
124.2 343.6
UNICOM 122.8 (CTAF)
AWOS-3 133.175

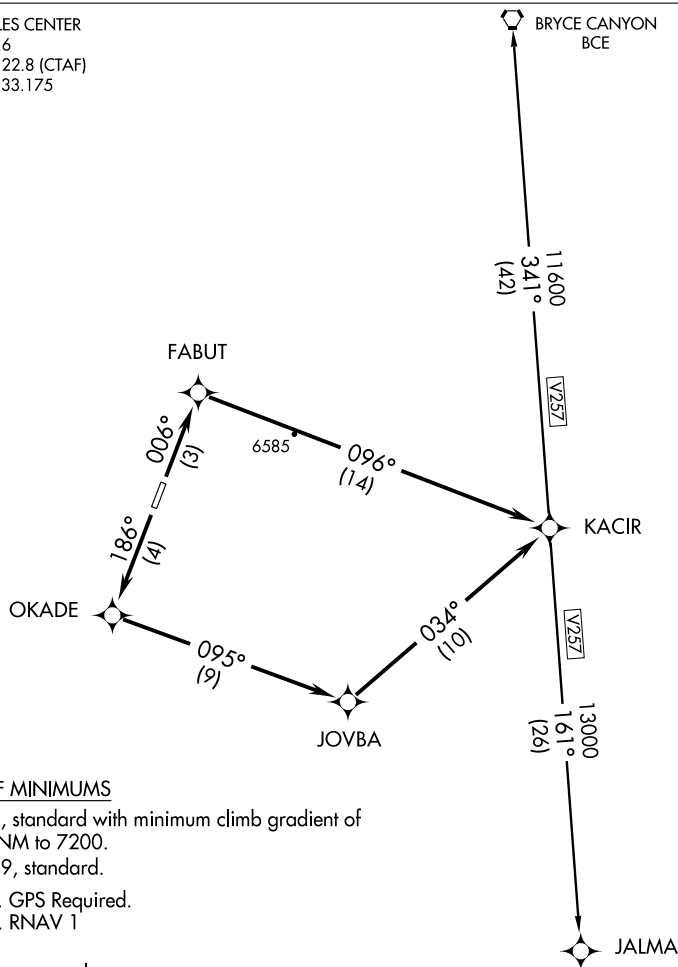

TAKE-OFF MINIMUMS

Runway 1, standard with minimum climb gradient of 316' per NM to 7200.

Runway 19, standard.

NOTE: 1. GPS Required.
2. RNAV 1

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 1: Climb via 006° course to FABUT WP, then via 096° course to KACIR WP, then via assigned transition/altitude.

TAKE-OFF RUNWAY 19: Climb via 186° course to OKADE WP, then via 095° course to JOVBA WP, then via 034° to KACIR WP, then via assigned transition/altitude.

BRYCE CANYON TRANSITION (KACIR1.BCE)




JALMA TRANSITION (KACIR1.JALMA)

APP CRS	Rwy Idg	6193
006°	TDZE	4831
	Apt Elev	4868


RNAV (GPS) RWY 1
KANAB MUNI (KNB)

<div><div></div><div></div></div> <div>DME/DME RNP-0.3 NA.</div>	MISSED APPROACH: Climbing right turn to 8200 direct DEDKE and hold.
--	---

AWOS-3 133.175	LOS ANGELES CENTER 124.2 343.6	UNICOM 122.8 (CTAF) 1
-------------------	-----------------------------------	--------------------------

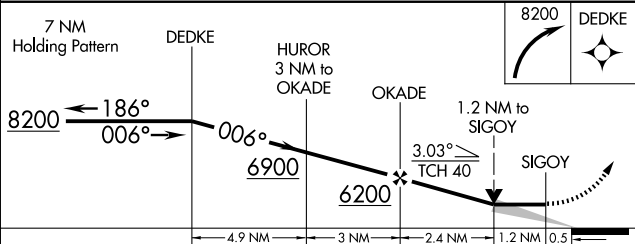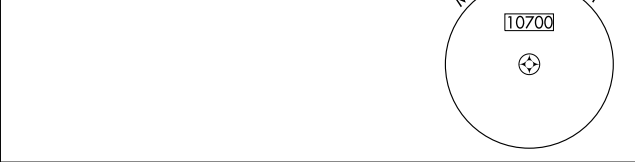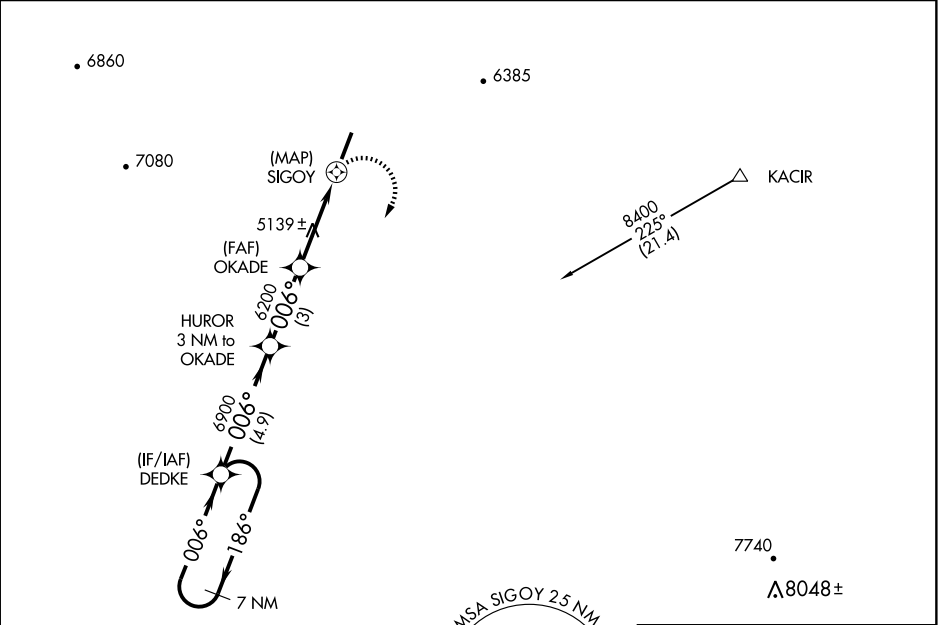

CATEGORY	A	B	C	D
LNNAV MDA	5400-1 569 (600-1)	5400-1½ 569 (600-1½)	5400-1½ 569 (600-1½)	NA
CIRCLING	5600-1 732 (800-1)	5960-1½ 1092 (1100-1½)	6200-3 1332 (1400-3)	NA

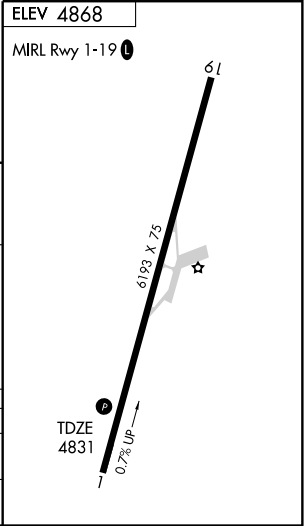

IFR TAKE-OFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

Civil Airports and Selected Military Airports

ALL USERS: Airports that have Departure Procedures (DPs) designed specifically to assist pilots in avoiding obstacles during the climb to the minimum enroute altitude, and/or airports that have civil IFR take-off minimums other than standard, are listed below. Take-off Minimums and Departure Procedures apply to all runways unless otherwise specified. Altitudes, unless otherwise indicated, are minimum altitudes in MSL.

DPs specifically designed for obstacle avoidance are referred to as Obstacle Departure Procedures (ODPs) and are described below in text, or published separately as a graphic procedure. If the (Obstacle) DP is published as a graphic procedure, its name will be listed below, and it can be found in either this volume (civil), or a separate Departure Procedure volume (military), as appropriate. Users will recognize graphic obstacle DPs by the term "(OBSTACLE)" included in the procedure title; e.g., TETON TWO (OBSTACLE). If not assigned a SID or radar vector by ATC, an ODP may be flown without ATC clearance to ensure obstacle clearance.

Graphic DPs designed by ATC to standardize traffic flows, ensure aircraft separation and enhance capacity are referred to as "Standard Instrument Departures (SIDs)". SIDs also provide obstacle clearance and are published under the appropriate airport section. ATC clearance must be received prior to flying a SID.

CIVIL USERS NOTE: Title 14 Code of Federal Regulations Part 91 prescribes standard take-off rules and establishes take-off minimums for certain operators as follows: (1) Aircraft having two engines or less - one statute mile. (2) Aircraft having more than two engines - one-half statute mile. These standard minima apply in the absence of any different minima listed below.

MILITARY USERS NOTE: Civil (nonstandard) take-off minima are published below. For military take-off minima, refer to appropriate service directives.

NAME TAKE-OFF MINIMUMS

BATTLE MOUNTAIN, NV

BATTLE MOUNTAIN (BAM)

AMDT 3 09127 (FAA)

TAKE-OFF MINIMUMS: **Rwy 3**, std. w/ a min climb of 282' per NM to 7300 or 4700-3 for climb in visual conditions. **Rwy 12**, std. w/ a min climb of 386' per NM to 7600 or 4700-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 3**, climb heading 032° to 8200 before proceeding on course or climb in visual conditions to cross Battle Mountain Airport at or above 9100 before proceeding on course. **Rwy 12**, climb heading 122° and BAM R-076 to 10000 before proceeding on course or climb in visual conditions to cross Battle Mountain Airport at or above 9100 before proceeding on course. **Rwy 21**, climb direct BAM VORTAC and BAM R-205 to 10100 before proceeding on course. **Rwy 30**, climb heading 302° and BAM R-324 to 9100 before proceeding on course.

BEAVER, UT

BEAVER MUNI

TAKE-OFF MINIMUMS: **Rwys 7, 25**, NA-obstacles. **Rwys 13, 31**, 2600-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwys 13, 31**, climb in visual conditions to cross Beaver Muni Airport Northwestbound at or above 8300 then climb to 10100 via MLF VORTAC R-102 to MLF VORTAC. Do not exceed 210 KIAS until established on MLF VORTAC R-102.

NAME TAKE-OFF MINIMUMS

BLANDING, UT

BLANDING MUNI

TAKE-OFF MINIMUMS: **Rwy 35**, 800-1 or std. with a min. climb of 350 feet per NM to 6700.

DEPARTURE PROCEDURE: **Rwy 17**, turn left. **Rwy 35**, turn right climb to 9000 via heading 090° and DVC R-223 to DVC VORTAC, then continue climb on course to MEA.

BRIGHAM CITY, UT

BRIGHAM CITY (BMC)

AMDT 5 09295 (FAA)

TAKE-OFF MINIMUMS: **Rwy 34**, std. w/ min. climb of 325' per NM to 5300 or 5100-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 16**, climbing right turn heading 205° and OGD R-331 to OGD VORTAC. **Rwy 34**, climbing left turn heading 205° and OGD R-331 to OGD VORTAC or for climb in visual conditions: cross Brigham City airport southbound at or above 9200 then via OGD R-351 to OGD VORTAC.

NOTE: **Rwy 16**, poles 266' from DER, 558' right of centerline, 30' AGL/4258' MSL.

BULLHEAD CITY, AZ

LAUGHLIN/BULLHEAD INTL (IFP)
AMDT 1 09183 (FAA)

TAKE-OFF MINIMUMS: **Rwy 16**, std. w/a min. climb of 370' per NM to 1800, or 1700-3 for climb in visual conditions. **Rwy 34**, std. w/a min. climb of 495' per NM to 5500, or 1700-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 16**, climb via heading 164° and EED VORTAC R-334 to EED VORTAC, or for climb in visual conditions: cross Laughlin/Bullhead Intl airport at or above 2300, then continue climbing via heading 155° and EED VORTAC R-335 to EED VORTAC. **Rwy 34**, climb via heading 344° to 1600, then climbing right turn direct EED VORTAC, or for climb in visual conditions: cross Laughlin/Bullhead Intl airport at or above 2300, then continue climbing via heading 155° and EED VORTAC R-335 to EED VORTAC. **All Aircraft** climb in EED VORTAC holding pattern (East, right turn, 257° inbound) to cross EED VORTAC at or above MEA for direction of flight before proceeding on course.

NOTE: **Rwy 16**, multiple bushes beginning 3600' from DER, left of centerline, up to 12' AGL/1029' MSL.

Rwy 34, multiple poles beginning 2211' from DER, right of centerline, up to 105' AGL/821' MSL.

CARSON CITY, NV

CARSON (CXP)
ORIG 08325 (FAA)

TAKE-OFF MINIMUMS: **Rwy 27**, NA-obstacles.
DEPARTURE PROCEDURE: **Rwy 9**, use JIMPA
DEPARTURE.

CASA GRANDE, AZ

CASA GRANDE MUNI

DEPARTURE PROCEDURE: **Rwy 5**, right turn. **Rwy 23**, climb direct TFD VORTAC. Continue climb in holding pattern (SW, right turn, 048° inbound) to MEA for direction of flight.

CEDAR CITY, UT

CEDAR CITY RGNL

TAKE-OFF MINIMUMS: **Rwy 8**, 3500-3 or std. with a min. climb of 450' per NM to 10000.

DEPARTURE PROCEDURE: **Rwys 20, 26**, turn right.

Rwys 2, 8, turn left, climb direct to CDC VOR/DME, continue climb to 9000 via R-348. Northbound continue on course. All others reverse course, climb to cross CDC VOR/DME at or above MCA for direction of flight.

CHANDLER, AZ

CHANDLER MUNI

DEPARTURE PROCEDURE: **Rwy 4R**, climbing left turn heading 220°. **Rwys 22L, 22R**, climbing left turn heading 190°. **All Aircraft**, continue climb via TFD R-350 to TFD VORTAC.

NOTE: **Rwy 4L**, multiple towers and buildings beginning 69' from departure end of runway, 397' left of centerline, up to 80' AGL/1319' MSL.

CHANDLER, AZ (CON'T)

STELLAR AIRPARK

DEPARTURE PROCEDURE: **Rwy 17**, turn left, climb via heading 150°. **Rwy 35**, turn right. **All aircraft** climb via TFD R-350 direct TFD VORTAC.

NOTE: **Rwy 17**, tower and signs beginning 574' from departure end of runway, 183' right of centerline, up to 50' AGL/1124' MSL. Sign 611' from departure end of runway, 365' left of centerline, 42' AGL/1214' MSL.

COLORADO CITY, AZ

COLORADO CITY MUNI

TAKE-OFF MINIMUMS: **Rwy 2, NA**.

DEPARTURE PROCEDURE: **Rwy 11**, turn right.

Rwys 20, 29, turn left. **All aircraft** climb to 7400 via the 160° bearing from AZC NDB then continue climb on course.

COOLIDGE, AZ

COOLIDGE MUNI

DEPARTURE PROCEDURE: **Rwys 5, 35**, climbing left turn heading 280° to intercept TFD R-063, then via R-063 to TFD VORTAC before proceeding on course.

Rwy 17, climbing right turn heading 240° to intercept TFD R-090, then via R-090 to TFD VORTAC before proceeding on course. **Rwy 23**, climb runway heading to intercept TFD R-090, then via R-090 to TFD VORTAC before proceeding on course.

DAVIS-MONTHAN AFB (KDMA)

TUCSON, AZ.07186

Diverse departures not authorized, use published departure procedure for obstacle avoidance.

TAKE-OFF OBSTACLES: **Rwy 12**: Terrain 0' AGL/2707' MSL, 81' from DER, 500' left of centerline. Terrain 0' AGL/2707' MSL, 46' from DER, 512' left of centerline. Terrain 0' AGL/2707' MSL, 16' from DER, 500' left of centerline. Terrain 0' AGL/2706' MSL, 0' from DER, 200' left of centerline.

Rwy 30: Terrain 0' AGL/2592' MSL, 0' from DER, 106' left of centerline. Terrain 0' AGL/2592' MSL, 7' from DER, 97' left of centerline. Terrain 0' AGL/2592' MSL, 0' from DER, 484' right of centerline. Terrain 0' AGL/2592' MSL, 13' from DER, 493' right of centerline. Vehicle 11' AGL/2615' MSL, 1017' from DER, 477' left of centerline. Terrain 0' AGL/2612' MSL, 237' from DER, 590' left of centerline.

DELTA, UT

DELTA MUNI

TAKE-OFF MINIMUMS: **Rwy 17**, std. with a min. climb of 412' per NM to 6600, or 1800-3 for climb in visual conditions. Climb in visual conditions NA at night. **Rwy 12**, NA-terrain. **Rwy 30**, NA-airspace.

DEPARTURE PROCEDURE: **Rwy 17**, climb via DTA VORTAC R-347 to DTA VORTAC, or climb in visual conditions to cross departure end of runway southbound at or above 6400, then via DTA VORTAC R-347 to DTA VORTAC, thence... **Rwy 35**, climb via heading 346° to 5800, then climbing left turn via heading 180° and DTA VORTAC R-310 to DTA VORTAC, thence...
...climb in holding pattern (hold south, left turn, 004° inbound) to cross DTA VORTAC at or above airway MEA for route of flight.

NOTE: **Rwy 17**, trees 1598' from departure end of runway, 62' right of centerline, 60' AGL/4799' MSL.



DOUGLAS BISBEE, AZ

BISBEE- DOUGLAS INTL

DEPARTURE PROCEDURE: Climb to 5700 in holding pattern, right turn to 140 inbound DUG VORTAC, then assigned route. CAT C, D turbojets climb not to exceed 250 kts. to 8000.

DUCHESNE, UT

DUCHESNE MUNI

DEPARTURE PROCEDURE: Climb direct to MTU VORTAC to depart at or above 7200 eastbound or 10000 westbound.

ELKO, NV

ELKO RGNL

TAKE-OFF MINIMUMS: **Rwy 5**, 2500-3 or std. with a min. climb of 330' per NM to 8000. **Rwy 23**, 2500-3 or std. with a min. climb of 340' per NM to 8000.

DEPARTURE PROCEDURE: **Rwy 5**, climb runway heading to 6000, then climbing right turn direct BQU VOR/DME, then...

Rwy 23, (V32 Southwest) climb to 6000, then climbing left turn heading 200° to intercept BQU R-241 (V32).

Rwy 23, all others climb runway heading to 6000, then climbing left turn direct BQU VOR/DME, then...

climb in BQU VOR/DME holding pattern (S, left turns, 340° inbound) to cross BQU VOR/DME at the MEA/MCA/MOCA for direction of flight.

ELY, NV

ELY AIRPORT-YELLAND FIELD

TAKE-OFF MINIMUMS: **Rwys 30,36**, 3000-2 or std. with a min. climb of 700' per NM to 10000.

DEPARTURE PROCEDURE: **Rwys 12,30,36**, right turn;

Rwy 18, straight ahead; intercept. ELY VOR/DME R-150 to 10000. Aircraft departing on V293 southeast climb on course to MEA. Departures V269 or V293 northbound, reverse course to the left, continue climb to cross ELY VOR/DME at or above 12000.

FALLON, NV

FALLON MUNI

TAKE-OFF MINIMUMS: **Rwy 13**, 300-1 or std. with a min. climb of 350' per NM to 4300.

DEPARTURE PROCEDURE: **Rwy 21**, turn right.

Rwys 3,13,31, turn left. All departures climb via HZN R-075 to HZN VORTAC. Climb in holding pattern (W, right turns, 075° inbound) to depart HZN VORTAC at or above: R-240 CW R-149, 8000; R-150 CW R-239, 9000. Continue climb on course to MEA or assigned altitude.

FALLON NAS (KNFL)

FALLON, NV

Diverse departures not authorized.

FLAGSTAFF, AZ

FLAGSTAFF PULLIAM

DEPARTURE PROCEDURE: **Rwy 3**, turn right. **Rwy 21**, turn left. Aircraft departing FLG R-160 CW R-175 climb on course. All others climb southbound on FLG R-172 to 9000, then climbing left turn direct FLG VOR/DME.

FORT HUACHUCA-SIERRA VISTA, AZ

SIERRA VISTA MUNI-LIBBY AAF

TAKE-OFF MINIMUMS: **Rwy 21**, NA.

DEPARTURE PROCEDURE: **Rwys 3,8,12**, turn left.

Rwys 26,30, turn right. All aircraft climb to 9500 to TOMBS Int via FHU VOR R-019 or 018° bearing from DAO NDB.

GLENDALE, AZ

GLENDALE MUNI

TAKE-OFF MINIMUMS: **Rwy 19**, NA-ATC.

DEPARTURE PROCEDURE: **Rwy 1**, Use DRAKE (RNAV) DEPARTURE.

GLOBE, AZ

SAN CARLOS APACHE (P13)

ADMT 2 08101 (FAA)

DEPARTURE PROCEDURE: Use IZTRI

DEPARTURE.

GOODYEAR, AZ

PHOENIX GOODYEAR

TAKE-OFF MINIMUMS: **Rwy 3**, NA-ATC.

DEPARTURE PROCEDURE: **Rwy 21**, Use POTER DEPARTURE.

GRAND CANYON, AZ

GRAND CANYON NATIONAL PARK

TAKE-OFF MINIMUMS: **Rwy 3**, NA-environmental.

DEPARTURE PROCEDURE: **Rwy 21**, use GRAND DEPARTURE.

HEBER CITY, UT

HEBER CITY MUNI-RUSS MCDONALD FIELD

DEPARTURE PROCEDURE: **Rwy 3**, Use COOLI

RNAV DEPARTURE.

HILL AFB (KHIF)

OGDEN, UT

Diverse departures not authorized, use radar vectors or published Departure Procedures (DP) for obstacle avoidance.

HUNTINGTON, UT

HUNTINGTON MUNI (69V)

AMDT 2A 09295 (FAA)

TAKE-OFF MINIMUMS: **Rwys 18,26,36**, NA. **Rwy 30**, 1700-3 or std. with a min. climb of 300' per NM to 8100.

DEPARTURE PROCEDURE: **Rwys 8,12**, climbing left turn direct PUC VOR/DME...

Rwy 30, climbing right turn direct PUC VOR/DME....

...continue climb in PUC VOR/DME holding pattern (hold S, right turns, 009° inbound) to MEA for direction of flight.

NOTE: **Rwy 8**, tree 2663' from DER, 922' left of centerline, 40' AGL/5979' MSL. **Rwy 12**, tree 333' from DER, 132' right of centerline, 40' AGL/5919' MSL.

Rwy 30, tree 2065' from DER, 875' left of centerline, 40' AGL/5999' MSL.



KANAB, UT**KANAB MUNI**

TAKE-OFF MINIMUMS: **Rwy 1**, std. with a min. climb of 316' per NM to 7200.

NOTE: Use KACIR ONE RNAV DEPARTURE.

KINGMAN, AZ**KINGMAN**

TAKE-OFF MINIMUMS: **Rwys 3,17,21,35**, 800-1 or std. with a min. climb of 210' per NM to 7000.

DEPARTURE PROCEDURE: Climb northbound on IGM R-010 until reaching 6000; reverse course to the left and continue climb to 9000 direct to IGM. If unable to cross IGM at 9000 continue climb in IGM holding pattern (SW, left turns, 027° inbound).

LAGUNA AAF (LGF)**YUMA PROVING GROUND, AZ (03247)**

Rwy 6, 18, 36 turn right, climb to 3600 direct BZA VORTAC.

Rwy 24 climb to 3600 direct to BZA VORTAC.

TAKE-OFF OBSTACLES:

Rwy 18: 386' (6' AGL) windsock, 818' from departure end of rwy, 194' left of centerline.

LAKE HAVASU CITY, AZ**LAKE HAVASU CITY**

TAKE-OFF MINIMUMS: **Rwy 14**, 300-1½ or std. w/ min. climb of 278' per NM to 1200. **Rwy 32**, 600-1½ or std. w/ min. climb of 492' per NM to 1100.

DEPARTURE PROCEDURE: **Rwy 14**, climbing right turn heading 300° to intercept EED VORTAC R-155 to EED VORTAC, climb in EED VORTAC holding pattern (east, right turn, 257° inbound) to cross EED VORTAC at or above airway MEA for route of flight. **Rwy 32**, climbing left turn heading 290° to intercept EED VORTAC R-155 to EED VORTAC, climb in EED VORTAC holding pattern (east, right turn, 257° inbound) to cross EED VORTAC at or above airway MEA for route of flight.

NOTE: **Rwy 14**, obstruction light on transmission tower,

1.2 NM from departure end of runway, 1885' left of centerline, 151' AGL/1027' MSL. Transmission tower 1.4 NM from departure end of runway, 1953' left of centerline, 145' AGL/1058' MSL. Bush 1080' from departure end of runway, 500' left of centerline, 31' AGL/825' MSL. Terrain 145' from departure end of runway, 347' left of centerline, 14' AGL/797' MSL. Bush 1256' from departure end of runway, 255' left of centerline, 35' AGL/818' MSL. **Rwy 32**, obstruction light on transmission tower 4052' from departure end of runway, 932' right of centerline, 180' AGL/974' MSL.

Transmission tower 2504' from departure end of runway, 1009' right of centerline, 112' AGL/903' MSL.

LAS VEGAS, NV**HENDERSON EXECUTIVE**

TAKE-OFF MINIMUMS: **Rwy 17L/R**, Cat A/B std. with a min. climb of 491' per NM to 6000, or 2100-3 for climb in visual conditions, Cat C/D NA. **Rwy 35L/R**, Cat A/B std. with a min. climb of 312' per NM to 4700, or 2100-3 for climb in visual conditions, Cat C/D NA.

DEPARTURE PROCEDURE: **Rwy 17L/R**, climbing right turn via LAS R-157 to LAS VORTAC before proceeding on course, or for climb in visual conditions: Cross Henderson Executive Airport eastbound at or above 4500, then via BLD R-249 to BLD VORTAC. **Rwy 35L/R**, climbing right turn via BLD R-257 to BLD VORTAC before proceeding on course, or for climb in visual conditions: Cross Henderson Executive Airport eastbound at or above 4500, then via BLD R-249 to BLD VORTAC.

NOTE: **Rwy 17L**, tree 5610' from departure end of runway, 82' left of centerline, 100' AGL/2739' MSL. Tree 1.9 miles from departure end of runway, 1495' left of centerline, 100' AGL/2859' MSL. **Rwy 17R**, tree 4041' from departure end of runway, 859' left of centerline, 100' AGL/2739' MSL.

MCCARRAN INTL (KLAS)

TAKE-OFF MINIMUMS: **Rwy 25R**, 200-1 or std. with a min. climb of 220' per NM to 2400.

DEPARTURE PROCEDURE: **Rwys 1L, 1R**, climbing right turn direct BLD VORTAC. **Rwys 7L, 7R**, climb via heading 075° to 3400 then climbing right turn direct BLD VORTAC. **Rwys 19L, 19R**, climbing left turn via heading 120° and BLD VORTAC R-257 to BLD VORTAC. **Rwys 25L, 25R**, climb via heading 255° to 2700 then climbing right turn direct BLD VORTAC.

NOTE: **Rwy 1L**, multiple poles, tree, and building 450' from departure end of runway, 283' left of centerline, up to 174' AGL/2132' MSL. Obstruction light on WSK 248' from departure end of runway, 224' right of centerline, 15' AGL/2104' MSL. **Rwy 1R**, multiple sign and building 1331' from departure end of runway, 448' right of centerline, up to 100' AGL/2120' MSL. **Rwy 7L**, multiple poles and trees 747' from departure end of runway, 442' right of centerline, up to 62' AGL/2062' MSL. Tree 1257' from departure end of runway, 789' left of centerline, 65' AGL/2077' MSL. **Rwy 7R**, lighted WSK 126' from departure end of runway, 290' right of centerline, 25' AGL/2051' MSL. **Rwy 19L**, multiple poles, sign and building 1394' from departure end of runway, 320' right of centerline, up to 51' AGL/2256' MSL. **Rwy 19R**, multiple poles, sign, and building 197' from departure end of runway, 125' right of centerline, up to 51' AGL/2256' MSL. Multiple pole and building 1396' from departure end of runway, 356' left of centerline, up to 47' AGL/2262' MSL. **Rwy 25L**, multiple poles, sign, and building 1003' from departure end of runway, 251' left of centerline, up to 63' AGL/2256' MSL. **Rwy 25R**, multiple poles and road 675' from departure end of runway, 17' right of centerline, up to 100' AGL/2301' MSL. Multiple poles and buildings 533' from departure end of runway, 1' left of centerline, up to 150' AGL/2469' MSL.

NORTH LAS VEGAS (VGT)**AMDT 3 08045 (FAA)**

DEPARTURE PROCEDURE: Use BOULDER CITY DEPARTURE.



LOGAN, UT

LOGAN-CACHE (LGU)

AMDT 8 09351 (FAA)

TAKE-OFF MINIMUMS: **Rwys 10,28**, NA-obstacles.DEPARTURE PROCEDURE: **Rwys 17, 35**, use

ORNEY DEPARTURE.

LOVELOCK, NV

DERBY FIELD (LOL)

ORIG-A 08297 (FAA)

TAKE-OFF MINIMUMS: **Rwy 1**, 2300-2 or std. with a min. climb of 300' per NM to 6200. **Rwy 7**, 1100-1 or std. with a min. climb of 250' per NM to 5000. **Rwys 19, 25**, 2300-2 or std. with a min. climb of 260' per NM to 6200.

DEPARTURE PROCEDURE: **Rwy 1**, turn right.**Rwys 7, 19, 25**, turn left, climb direct LLC VORTAC.

Aircraft departing 330° CW 359° climb via LLC R-333 to ROBUD INT; 360° CW 089° climb in LLC VORTAC holding pattern (hold NW, left turns, 153° inbound) to depart LLC VORTAC at or above 8600; 090° CW 219° climb on course; 220° CW 329° climb in LLC VORTAC holding pattern to depart LLC VORTAC at or above 8600. Continue climb on course to MEA or assigned altitude.

LUKE AFB (KLUF)

GLENDALE, AZ AMDT 3, 09183

Diverse departures not authorized.

Use published DP, if unable to comply with DP notify clearance delivery and request RADAR Vectors.

TAKE-OFF OBSTACLES:

RWY 3L: Taxiing aircraft, 19' AGL/1126' MSL, 1221' from DER, 782' left of centerline. Taxiing aircraft, 19' AGL/1126' MSL, 1407' from DER, 609' left of centerline. Weather equipment, 15' AGL/1117' MSL, 759' from DER, 505' right of centerline. Weather equipment, 15' AGL/1117' MSL, 1209' from DER, 505' right of centerline. Building, 20' AGL/1127' MSL, 1620' from DER, 925' left of centerline.

RWY 21L: Taxiing aircraft, 38' AGL/1120' MSL, 1428' from DER, 774' left of centerline.

MESA, AZ

FALCON FIELD

TAKE-OFF MINIMUMS: **Rwys 4L, 4R**, std. with a min. climb of 459' per NM to 3600, or 1100-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 4L, 4R**, climbing left turn to 5000 via 220° bearing from FFZ NDB to intercept the PXR VORTAC R-143 southeast bound. For climb in visual conditions cross FFZ NDB at or above 2300 then proceed via 220° bearing to PXR R-143 southeast bound. **Rwy 22L, 22R**, climb to 5000 via 220° bearing from FFZ NDB to intercept the PXR VORTAC R-143 southeast bound.

NOTE: **Rwy 4L**, light standard 416' from departure end of runway, 415' left of centerline, 48' AGL/1428' MSL.

Obstacle light on building 1313' from departure end of

runway, 424' left of centerline, 54' AGL/1434' MSL. **Rwy****4R**, light standard 514' from departure end of runway,

565' right of centerline, 48' AGL/1441' MSL. Tree 1097'

from departure end of runway, 650' right of centerline,

50' AGL/1448' MSL. Tree 1060' from departure end of

runway, 359' right of centerline, 50' AGL/1451' MSL.

Rwy 22L, light pole 254' from departure end of runway,

538' right of centerline, 13' AGL/1382' MSL. Windmill

691' from departure end of runway, 528' right of

centerline, 30' AGL/1389' MSL. Windmill 715' from

departure end of runway, 603' right of centerline, 30'

AGL/1389' MSL. Light pole 68' from departure end of

runway, 764' right of centerline, 13' AGL/1382' MSL.

Tree 175' from departure end of runway, 826' right of

centerline, 13' AGL/1383' MSL. **Rwy 22R**, light pole

296' from departure end of runway, 541' right of

centerline 13' AGL/1400' MSL. Light pole 495' from

departure end of runway, 187' right of centerline, 13'

AGL/1382' MSL. Light pole 594' from departure end of

runway, 65' right of centerline, 13' AGL/1382' MSL.

MESQUITE, NV

MESQUITE

TAKE-OFF MINIMUMS: **Rwy 1**, 900-3, or std. with a min. climb of 620' per NM to 2400.

DEPARTURE PROCEDURE: **Rwy 1**, climbing left turn,**Rwy 19**, climbing right turn. All aircraft climb direct

MMM VORTAC. Aircraft departing MMM R-149 CW

R-220 climb on course. All others continue climb via

MMM R-196 to 6100 and reverse course to cross MMM

VORTAC at or above: R-221 CW R-270 and R-331 CW

R-060, 6100; R-271 CW R-330, 7300; R-061 CW

R-150, 8300.

MICHAEL AAF (KDPG),

DUGWAY PROVING GROUND, UT

.....Amdt 1, 09099

Rwy 12, 4700-3*

* Or standard with minimum climb of 305 ft/NM to 6100.

DEPARTURE PROCEDURES: **Rwy 12** Climb via heading 122° to 6100, then right turn direct DPG NDB. Continue climb in DPG NDB holding pattern (Hold W, LT, 080° inbound) to 9600 before proceeding on course, or for climb in visual conditions: Cross Michael AAF, Dugway Proving Ground at or above 8900 before proceeding on course. **Rwy 30** Climb via heading 302° to 6100 then left turn direct DPG NDB, continue climb in DPG NDB holding pattern (Hold W, LT, 080° inbound) to 9600 before proceeding on course.



MILFORD, UT

MILFORD MUNI/BEN AND JUDY BRISCOE
FIELD

TAKE-OFF MINIMUMS: **Rwy 34**, CAT A,B 1200-2 or std. with a min. climb of 360' per NM to 6500. CAT C,D NA.
DEPARTURE PROCEDURE: **Rwy 16**, climb direct MLF VORTAC. **Rwy 34**, climbing left turn direct MLF VORTAC. Aircraft departing MLF R-170 CW R-210 climb on course. All other aircraft continue climb southbound via MLF R-190 to 7600, then climbing right turn to cross MLF VORTAC at or above 9000, then climb on course.

MINDEN, NV

MINDEN-TAHOE

TAKE-OFF MINIMUMS: **Rwys 12,16,30**, NA. **Rwy 34**, 4000-3 or std. with a min. climb of 531' per NM to 8700.
DEPARTURE PROCEDURE: **Rwy 34**, use MINDEN RNAV DEPARTURE.

MOAB, UT

CANYONLANDS FIELD

TAKE-OFF MINIMUMS: **Rwy 3**, std. with a min. climb of 320' per NM to 5800. **Rwy 21**, std. with a min. climb of 330' per NM to 5400.

DEPARTURE PROCEDURE: **Rwy 3**, turn left. **Rwy 21**, turn right climb to 6700 via OAB R-293, then climbing right turn direct OAB VOR/DME. Climb in OAB holding pattern (NW, left turns, 113° inbound) to 10000 then proceed on course.

NOTE: **Rwy 3**, tree 4383' from departure end of runway, 1507' right of centerline, 50' AGL/4729' MSL. Road 1749' from departure end of runway, 905' left of centerline, 15' AGL/4635' MSL. Tree 3914' from departure end of runway, 1166' right of centerline, 50' AGL/4690' MSL. Tree 1.25 NM from departure end of runway, 400' right of centerline, 50' AGL/4758' MSL.

Rwy 21, pole 2026' from departure end of runway, 78' right of centerline, 80' AGL/4625' MSL. Pole 2061' from departure end of runway, 40' right of centerline, 80' AGL/4625' MSL. Pole 2095' from departure end of runway, 857' right of centerline, 80' AGL/4623' MSL. Pole 1980' from departure end of runway, 344' right of centerline, 80' AGL/4602' MSL.

NELLIS AFB (KLSV)

LAS VEGAS, NV

08241

Rwy 3L/R, 10,200-3' SR-SS

Rwy 21L/R, 10,200-3' SR-SS

Diverse departure not authorized.

MILITARY: Use published DP, if unable to comply with

DP climb gradient file appropriate DP for intended

destination and notify clearance delivery and request

RADAR Vectors (Climb Gradient of 300' per NM until

12,000 for RADAR Vectors). If unable to comply with

RADAR Vector climb gradient, A/C must depart VFR.

* CIVIL: Use published DP, if unable to comply with DP

climb gradient file appropriate DP for intended

destination and notify clearance delivery and request

RADAR Vectors (Climb Gradient of 330' per NM until

12,000 for RADAR Vectors). If unable to comply with

RADAR Vectors climb gradient, A/C may use published

weather minimums or depart VFR.

TAKE-OFF OBSTACLES: **RWY 3L**: Terrain 0' AGL/

1870' MSL, 0' inward of DER, 500' left of centerline.

Road 15' AGL/1934' MSL, 1321' from DER, 802' left of

centerline. **RWY 3R**: C-5 on taxiway 65' AGL/1936'

MSL, 1345' from DER, 822' right of centerline. Road

15' AGL/2014' MSL, 3929' from DER, 1404' right of

centerline. **RWY 21L**: Trees 90' AGL/1949' MSL, 4594'

from DER, 1596' right of centerline. Trees 90' AGL/

1949' MSL, 4940' from DER, 541' right of centerline.

Trees 60' AGL/1899' MSL 929' from DER, 724' left of

centerline. Trees 60' AGL/1899' MSL, 946' from DER,

626' left of centerline. Trees 60' AGL/1899' MSL, 2720'

from DER, 341' left of centerline. Trees 60' AGL/1899'

MSL, 2514' from DER, 403' left of centerline.

RWY 21R: Terrain 0' AGL/1835' MSL, 0' inward of DER,

500' right of centerline. Trees 90' AGL/1949' MSL, 4594'

from DER, 597' right of centerline. Building 45' AGL/

1904' MSL, 2274' from DER, 1037' right of centerline.

Road 15' AGL/1874' MSL, 1404' from DER, 465' right of

centerline.

NOGALES, AZ

NOGALES INTL (OLS)

AMDT 2 09351 (FAA)

TAKE-OFF MINIMUMS: Use NOGALES DEPARTURE.

OGDEN, UT

OGDEN-HINCKLEY (OGD)

AMDT 2 08101 (FAA)

TAKE-OFF MINIMUMS: **Rwys 7,16**, NA- Obstacles.

DEPARTURE PROCEDURE: **Rwys 3, 21, 25, 34**, Use

EMONT DEPARTURE.

PAGE, AZ

PAGE MUNI (PGA)
AMDT 2 08045 (FAA)

TAKE-OFF MINIMUMS: **Rwys 7, 25**, NA—obstacles

Rwy 15, 300-1 or std. w/ min. climb of 252' per NM to 6500, or 1900-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 15**, climb via 157° heading to 6000, then climbing right turn to PGA VOR/DME. cross PGA VOR/DME at or above 7700. Continue climb in PGA VOR/DME holding pattern (hold NW, right turns, 147° inbound) to airway MEA, or climb in visual conditions: cross Page airport at or above 6100, before proceeding on course. **Rwy 33**, climb via 337° heading to 6000, then climbing left turn to PGA VOR/DME. Cross PGA VOR/DME at or above 7700. Continue climb in PGA VOR/DME holding pattern (hold NW, right turns, 147° inbound) to airway MEA.

NOTE: **Rwy 15**, terrain 192' from departure end of runway, 274' right of centerline, 4323' MSL, tree 1.07 NM from departure end of runway, 167' left of centerline, 4519 MSL, transmission lines 1.96 NM from departure end of runway, 825' left of centerline, 100' AGL/4519' MSL, power line 4.00 NM from departure end of runway, 3606' right of centerline, 75' AGL/4819' MSL, power line 4.35 NM from departure end of runway, 3968' right of centerline, 75' AGL/4919' MSL, power line 5.36 NM from departure end of runway, 5039' right of centerline, 75' AGL/5119' MSL, power line 4.51 NM from departure end of runway, 4136' right of centerline, 75' AGL/5019' MSL, tree 4.52 NM from departure end of runway, 1508' right of centerline, 100' AGL/5173' MSL, AAO 4.58 NM from departure end of runway, 1617' right of centerline, 200' AGL/5187' MSL, AAO 5.15 NM from departure end of runway, 4456' left of centerline, 200' AGL/5190' MSL, tree 5.56 NM from departure end of runway, 4097' right of centerline, 30' AGL/5249' MSL, AAO 5.98 NM from departure end of runway, 653' left of centerline, 200' AGL/5440' MSL.

PARKER, AZ

AVI SUQUILLA

TAKE-OFF MINIMUMS: **Rwy 1**, 800-1½. **Rwy 19**, 300-1. DEPARTURE PROCEDURE: **Rwy 19**, right turn. **Rwy 1**, left turn. Climb via R-067 to PKE VORTAC, to cross above 4500. Continue climb on course to MEA or assigned altitude.

PAYSON, AZ

PAYSON

TAKE-OFF MINIMUMS: **Rwy 6**, std. with a min. climb of 360' per NM to 9300, or 2500-3 for climb in visual conditions. **Rwy 24**, std. with a min. climb of 375' per NM to 9300, or 2500-3 for climb in visual conditions. DEPARTURE PROCEDURE: **Rwys 6, 24**, for climb in visual conditions: Cross Payson Airport at or above 7500, then proceed on course.

NOTE: **Rwy 24**, bush 15' from departure end of runway, 133' right of centerline, 6' AGL/5148' MSL. Tree 320' from departure end of runway, 183' right of centerline, 12' AGL/5154' MSL. Fence 85' from departure end of runway, 84' left of centerline, 4' AGL/5141' MSL. Tree 164' from departure end of runway, 126' left of centerline, 9' AGL/5147' MSL.

PHOENIX, AZ

PHOENIX-DEER VALLEY

DEPARTURE PROCEDURE: Use DEER VALLEY DEPARTURE.

PHOENIX SKY HARBOR INTL (PHX)

AMDT 4A 09071 (FAA)

TAKE-OFF MINIMUMS: **Rwy 26**, 700-3 or std. with a min. climb of 358' per NM to 2000.

DEPARTURE PROCEDURE: **Rwys 7L, 7R, 8**, climb via 078° heading to 3000, then climbing right turn direct PHOENIX (PXR) VORTAC. **Rwys 25L, 25R**, climb via 258° heading to 1550 then climbing right turn to join the PXR R-260 (V16) westbound, climb to 5000. **Rwy 26**, climb via 258° heading to 1550 then climbing left turn to join the PXR R-260 (V16) westbound, climb to 5000. Westbound departures continue climb on PXR R-260. All others, climbing right turn direct PXR VORTAC.

NOTE: **Rwy 7L**, building 1332' from DER, 798' left of centerline, 67' AGL/1176' MSL. **Rwy 7R**, rod 716' from DER, 184' right of centerline, 87' AGL/1196' MSL. **Rwy 8**, light standard 3530' from DER, 1207' left of centerline, 123' AGL/1232' MSL. Light standard 3479' from DER, 1003' left of centerline, 118' AGL/1227' MSL. **Rwy 25L**, light standard 1129' from DER, 774' left of centerline, 91' AGL/1200' MSL. ASDE-X equipment 411' from DER, 531' left of centerline, 29' AGL/1135' MSL. **Rwy 26**, light 59' from DER, 63' right of centerline, 16' AGL/1125' MSL. Pole 58' from DER, 90' right of centerline, 25' AGL/1125' MSL. Light 78' from DER of runway, 64' right of centerline, 18' AGL/1127' MSL. Light 38' from DER, 440' left of centerline, 24' AGL/1135' MSL. Light standard 77' from DER, 453' left of centerline, 27' AGL/1136' MSL. Light standard 74' from DER, 456' right of centerline, 33' AGL/1142' MSL. Light standard 77' from DER, 434' right of centerline, 31' AGL/1140' MSL. Tree 113' from DER, 294' right of centerline, 24' AGL/1133' MSL. Building 2.32 NM from DER, 3309' right of centerline, 406' AGL/1496' MSL. Building 2.28 NM from DER, 3612' right of centerline, 663' AGL/1750' MSL. Tree 234' from DER, 214' right of centerline, 24' AGL/1133' MSL. Light standard 64' from DER, 68' left of centerline, 39' AGL/1125' MSL. ASDE-X equipment 897' from DER, 413' right of centerline, 35' AGL/1141' MSL.

PHOENIX-MESA GATEWAY

TAKE-OFF MINIMUMS: **Rwys 30L, 30C, 30R**, CAT C, D, E 2000-2 or std. with a min. climb of 230' per NM to 3900.

DEPARTURE PROCEDURE: **Rwys 12L, 12C, 12R**, climb to 2500 via IWA R-122 then climbing right turn direct PXR VORTAC. **Rwys 30L, 30C, 30R**, climbing right turn to 4000 via IWA R-122 then climbing right turn direct PXR VORTAC.



PRESCOTT, AZ

ERNEST A. LOVE FIELD

TAKE-OFF MINIMUMS: **Rwy 12**, 2700-2 or std. with a min. climb of 460' per NM to 8100. **Rwy 21L**, 2700-2 or std. with a min. climb of 500' per NM to 8100. **Rwy 30**, 300-1 or std. with a min. climb of 300' per NM to 5200. **Rwy 3L**, 21R, NA.

DEPARTURE PROCEDURE: **Rwy 3R**, turn left heading 250° to intercept DRK R-305. **Rwy 12**, turn right direct DRK VORTAC. **Rwy 21L**, turn right heading 335° to intercept DRK R-305. **Rwy 30**, climb direct DRK VORTAC. **All aircraft** continue climb via DRK R-305 to 9000. Aircraft departing via DRK R-305 continue climb on course. All other aircraft turn right direct DRK VORTAC then climb on course.

RENO, NV

RENO/STEAD (RTS)

AMDT 3A 09183 (FAA)

TAKE-OFF MINIMUMS: CAT A,B only, CAT C,D NA.

Rwys 8,14, 1300-2 or std. with a min. climb of 400' per NM to 6500. **Rwy 26**, 1900-2 or std. with a min. climb of 410' per NM to 7200. **Rwy 32**, 2300-2 or std. with a min. climb of 420' per NM to 7200.

DEPARTURE PROCEDURE: **Rwys 8,32**, climbing right turn heading 100° and FMG VORTAC R-314 to FMG VORTAC. **Rwy 14**, left turn climb direct FMG VORTAC. **Rwy 26**, climbing right turn heading 050° and FMG VORTAC R-314 to FMG VORTAC. **All aircraft** climb in FMG VORTAC holding pattern (NE, right turns, 221° inbound) to depart FMG VORTAC; R-260 CWR R-170 at or above 10000; R-171 CWR R-195 at or above 10500; R-196 CWR R-259 at or above 12000.

PRICE, UT

CARBON COUNTY RGNL/BUCK DAVIS FLD (PUC)

AMDT 4 09071 (FAA)

TAKE-OFF MINIMUMS: **Rwy 7**, NA - per flight check **Rwy 32**, std. w/ min. climb of 425' per NM to 7000, or 3400-3 for climb in visual conditions. **Rwy 36**, std. w/ min. climb of 400' per NM to 7200, or 3400-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 14**, climb on a heading between 126° CW to 193°, thence... **Rwy 18**, climb on a heading between 192° CCW to 125°, thence... **Rwy 25**, climb on a heading between 176° CCW to 124°, thence... **Rwy 32**, climb to 7000 then climbing left turn on a heading between 175° CCW to 145°, thence... **Rwy 36**, climb to 6400 then climbing right turn on a heading between 141° CW to 184°, maintain 210K until completion of turn, thence...

...continue climb to assigned altitude for direction of flight. **Rwys 32, 36**, for climb in visual conditions cross Carbon County Rgnl/ Buck Davis Field at or above 9200 before proceeding on course.

NOTE: **Rwy 14**, multiple trees beginning 121' from DER, 3' left of centerline, up to 40' AGL/5839' MSL. **Rwy 25**, trees 515' from DER, 535' right of centerline, up to 40' AGL/5879' MSL. **Rwy 32**, trees 9544' from DER, 1644' left of centerline, up to 40' AGL/6900' MSL. Trees 11332' from DER, 74' right of centerline, up to 40' AGL/6800' MSL. **Rwy 36**, poles 2599' from DER, 615' left of centerline, 40' AGL/6079' MSL. Poles 2715' from DER, 668' right of centerline, 59' AGL/6098' MSL.

PROVO, UT

PROVO MUNI

DEPARTURE PROCEDURE: Use PROVO
DEPARTURE.



RENO, NV (CON'T)

RENO/TAHOE INTL (RNO)

AMDT 4 07354 (FAA)

TAKE-OFF MINIMUMS: **Rwy 7**, NA-terrain. **Rwy 16L**, std. w/ min. climb of 730' per NM to 8000, or 600-1½ w/ min. climb of 480' per NM to 8000, or 2700-3 for climb in visual conditions. **Rwy 16R**, std. w/ the following minimum climb requirements: 210 knots or less, 385' per NM to 8000; more than 210 knots, 420' per NM to 8900, or 2700-3 for climb in visual conditions. Resume normal speed after passing FMG VORTAC. **Rwy 25**, std. w/ min. climb of 470' per NM to 7800, or 2700-3 for climb in visual conditions. **Rwy 34L**, std. w/ min. climb of 320' per NM to 7000, or 2700-3 for climb in visual conditions. **Rwy 34R**, std. w/ min. climb of 480' per NM to 7000, or 500-1½ w/ min. climb of 320' per NM to 7000, or 2700-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwys 16L/R**, climb heading 164° to 6600 then climbing left turn direct FMG VORTAC, thence... or for climb in visual conditions: cross Reno/Tahoe Intl Airport at or above 7000 via heading 054° and FMG R-234 to FMG VORTAC, thence... **Rwy 25**, climb heading 254° to 5000 then climbing right turn direct FMG VORTAC, thence... or for climb in visual conditions: cross Reno/Tahoe Intl Airport at or above 7000 via heading 054° and FMG R-234 to FMG VORTAC, thence... **Rwys 34L/R**, climb heading 344° to 7000 then climbing right turn direct FMG VORTAC, thence... or for climb in visual conditions: cross Reno/Tahoe Intl Airport at or above 7000 via heading 054° and FMG R-234 to FMG VORTAC, thence...

... **All aircraft**: continue climb in FMG VORTAC holding pattern (northeast, left turn, 221° inbound) to cross FMG VORTAC at or above MEA/MCA for route of flight.

NOTE: **Rwy 16L**, multiple poles, trees, bushes and terrain beginning 618' from departure end of runway, 133' left of centerline, up to 20' AGL/4961' MSL. **Rwy 16R**, multiple trees 2784' from departure end of runway, 171' right of centerline, up to 20' AGL/4510' MSL. Multiple trees and terrain beginning 746' from departure end of runway, 380' left of centerline, up to 20' AGL/4703' MSL. **Rwy 25**, multiple trees and poles beginning 829' from departure end of runway, 201' right of centerline, up to 103' AGL/4523' MSL. Building 6023' from departure end of runway, 456' right of centerline, 152' AGL/4608' MSL. Fence 222' from departure end of runway, 270' right of centerline, up to 5' AGL/4415' MSL. Multiple trees and poles beginning 500' from departure end of runway, 31' left of centerline, up to 20' AGL/4506' MSL. **Rwy 34L**, multiple trees and poles beginning 1229' from departure end of runway, 180' right of centerline, up to 20' AGL/4498' MSL. Multiple trees beginning 1193' from departure end of runway, 331' left of centerline, up to 20' AGL/4489' MSL. **Rwy 34R**, multiple trees and poles beginning 1067' from departure end of runway, 172' right of centerline, up to 20' AGL/4497' MSL. Multiple trees and poles beginning 1230' from departure end of runway, 350' left of centerline, up to 20' AGL/4498' MSL. Building 1.2 NM from departure end of runway, 1730' right of centerline, 363' AGL/4780' MSL.

RICHFIELD, UT

RICHFIELD MUNI (RIF)

AMDT 1 08157 (FAA)

DEPARTURE PROCEDURE: **Rwy 1**, use RICHFIELD (RNAV) DEPARTURE. **Rwy 19**, use HAMET (RNAV) DEPARTURE.

ROOSEVELT, UT

ROOSEVELT MUNI

TAKE-OFF MINIMUMS: **Rwy 25**, 700-3 or std. with a min. climb of 300' per NM to 6100.

DEPARTURE PROCEDURE: **Rwy 7**, turn right.

Rwy 25, turn left. **All aircraft**, climb direct MTU VORTAC. Aircraft departing MTU VORTAC R-040 CW R-150, climb on course. All others continue climb in MTU holding pattern (NE, right turns, 213° inbound) to cross MTU VORTAC; R-151 CW R-290 at or above 8000; R-291 CW R-039 at or above 10,000. Then climb on course.

SAFFORD, AZ

SAFFORD RGNL

TAKE-OFF MINIMUMS: IFR departure not authorized.

ST. GEORGE, UT

ST. GEORGE MUNI

TAKE-OFF MINIMUMS: **Rwy 34**, 1500-2 or std. with a min. climb of 325' per NM to 4000.

DEPARTURE PROCEDURE: **Rwy 16**, turn left. **Rwy 34**, turn right. Climb in OZN VOR/DME holding pattern (hold SE, right turns, 296 inbound) to depart OZN VOR/DME at or above MEA for direction of flight.

ST. JOHNS, AZ

ST. JOHNS INDUSTRIAL AIR PARK (SJN)

AMDT 1A 08241 (FAA)

TAKE-OFF MINIMUMS: **Rwy 21**, 400-2 or std. with a min. climb of 205' per NM to 6200.

DEPARTURE PROCEDURE: **Rwys 3, 32**, climbing right turn, **Rwys 14, 21**, climbing left turn. **All aircraft**, climb direct SJN VORTAC. Aircraft departing SJN VORTAC R-240 CW R-080 climb on course. All others continue climb in SJN VORTAC holding pattern (Hold NE, right turns, 239° inbound) to cross SJN VORTAC at or above 9000.

NOTE: **Rwy 14**, 5790' tower 350' right abeam departure end of runway.



SALT LAKE CITY, UT

SALT LAKE CITY INTL (SLC)

AMDT 10 09071 (FAA)

TAKE-OFF MINIMUMS: **Rwys 14, 32**, NA, operational.
 DEPARTURE PROCEDURE: **Rwys 16L, 16R**, climb to 10000 via heading 161° and FFU R-341 to FFU VORTAC before proceeding on course. **Rwy 17**, climb to 10000 via heading 166° and FFU R-341 to FFU VORTAC before proceeding on course. **Rwys 34L, 34R**, climb to 9000 via heading 341° and OGD R-153 to OGD VORTAC before proceeding on course. **Rwy 35**, climb to 9000 via heading 336° and OGD R-153 to OGD VORTAC before proceeding on course.

NOTE: **Rwy 16L**, vehicle 124' from DER, 14' right of centerline, 15' AGL/4239' MSL. Light pole 988' from DER, 726' right of centerline, 34' AGL/4254' MSL. Pole 1024' from DER, 689' right of centerline, 34' AGL/4254' MSL. **Rwy 17**, vehicles beginning 335' from DER, on centerline, up to 17' AGL/4241' MSL. **Rwy 34R**, post 13' from DER, 349' right of centerline, 3' AGL/4227' MSL. **Rwy 35**, post 56' from DER, 249' left of centerline, 2' AGL/4220' MSL.

SOUTH VALLEY RGNL AIRPORT (U42)

AMDT 4A 09155 (FAA)

TAKE-OFF MINIMUMS: **Rwy 16**, 2400-3 or std. with a min. climb of 295' per NM to 7700. **Rwy 34**, std. with a min. climb of 353' per NM to 9500.

DEPARTURE PROCEDURE: **Rwy 16**, climbing left turn to 9600 via heading 136° and V21 (TCH R-161 FFU R-341) to FFU VORTAC. Aircraft departing FFU R-156 CW R-263 and R-308 CW R-359 climb on course. All others continue climb in FFU VORTAC holding pattern (S, right turns, 008° inbound) to cross FFU VORTAC at or above: R-360 CW R-093 12400; R-094 CW R-138 10600; R-139 CW R-155 11300; R-264 CW R-307 11500. **Rwy 34**, climbing right turn to 9500 via heading 026° and V21 (TCH R-161) to TCH VORTAC. Aircraft departing TCH R-144 CW R-176 and R-217 CW R-355 climb on course. All others continue climb in TCH VORTAC holding pattern (NW, right turns, 116° inbound) to cross TCH VORTAC at or above: R-356 CW R-116 10700; R-117 CW R-143 11600; R-177 CW R-216 10100.

SCOTTSDALE, AZ

SCOTTSDALE (SDL)

AMDT 7 08269 (FAA)

TAKE-OFF MINIMUMS: **Rwy 3**, std. w/ min climb of 440' per NM to 4000, or 3100-3 for climb in visual conditions. **Rwy 21**, std. w/ min. climb of 215' per NM to 4000, or 3100-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 3**, climbing left turn to 4000 via heading 220° and PXR VORTAC R-336 southeast bound to PXR VORTAC. Thence...

Or, for climb in visual conditions: cross Scottsdale airport at or above 4500 MSL before proceeding on course. **Rwy 21**, climbing right turn to 4000 via heading 300° and PXR VORTAC R-336 northwest bound then left turn direct PXR VORTAC. Thence...

Or, for climb in visual conditions: cross Scottsdale airport at or above 4500 MSL before proceeding on course.

...continue climb on course.

NOTE: **Rwy 3**, multiple light standards beginning 63' from departure end of runway, 445' left of centerline, up to 44' AGL/1554' MSL. Hoist on dike 878' from departure end of runway, 735' left of centerline, 51' AGL/1561' MSL. Dike beginning 1066' from departure end of runway, 316' left of centerline, 38' AGL/1548' MSL. Day marker on dike 1230' from departure end of runway, 5' left of centerline, 39' AGL/1549' MSL. Tree, 269' from departure end of runway, 490' left of centerline, 13' AGL/1523' MSL. Tree 51' from departure end of runway, 279' left of centerline, 6' AGL/1516' MSL. Tree 765' from departure end of runway, 115' left of centerline, 22' AGL/1532' MSL. Road beginning 647' from departure end of runway, 296' left of centerline, 19' AGL/1529' MSL. Tree 227' from departure end of runway, 97' left of centerline, 6' AGL/1516' MSL. Fence beginning 5' from departure end of runway, 338' right of centerline, 6' AGL/1511' MSL. Light standard, 1013' from departure end of runway, 430' right of centerline, 44' AGL/1552' MSL. **Rwy 21**, tree 1072' from departure end of runway, 426' right of centerline, 53' AGL/1497' MSL. Building 316' from departure end of runway, 537' right of centerline, 23' AGL/1467' MSL. Tree 2087' from departure end of runway, 418' left of centerline, 61' AGL/1505' MSL. Tree 1432' from departure end of runway, 438' right of centerline, 38' MSL/1482' MSL. Tree 2234' from departure end of runway, 559' left of centerline, 58' AGL/1502' MSL.

SEDONA, AZ

SEDONA (SEZ)

AMDT 1 08101 (FAA)

TAKE-OFF MINIMUMS: **Rwy 3**, NA- Obstacles.

DEPARTURE PROCEDURE: **Rwy 21**, Use OATES RNAV DEPARTURE.

SHOW LOW, AZ

SHOW LOW RGNL

DEPARTURE PROCEDURE: **Rwys 3, 6**, turn left.

Rwys 21, 24, turn right. All aircraft climb via 345 bearing from SOW NDB to DEHOG INT then climb on course.



SPRINGERVILLE, AZ**SPRINGERVILLE MUNI**

TAKE-OFF MINIMUMS: **Rwy 21**, 1000-2 or std. with a min. climb of 360' per NM to 8400.

DEPARTURE PROCEDURE: **Rwys 3, 11**, climbing left turn to 8400 via heading 360° before proceeding on course. **Rwys 21, 29**, climbing right turn to 8400 via 360° before proceeding on course.

TAYLOR, AZ**TAYLOR MUNI**

TAKE-OFF MINIMUMS: **Rwy 21**, 300-1 or std. with a min. climb of 248' per NM to 6100.

DEPARTURE PROCEDURE: **Rwy 3/21**, climb on runway heading to 8000 before turning on course.

TONOPAH, NV**TONOPAH**

TAKE-OFF MINIMUMS: **Rwys 11, 29, NA. Rwys 15, 33**, 2600-2 or std. with a min. climb of 260' per NM to 8000.

DEPARTURE PROCEDURE: **Rwy 15**, turn left. **Rwy 33**, turn right. Climb direct TPH VORTAC. Continue climb in holding pattern (NE, right turns, 246° inbound) to depart TPH VORTAC at or above 8000. Climb on course to MEA or assigned altitude.

TOOELE, UT**BOLINDER FIELD-TOOELE VALLEY**

TAKE-OFF MINIMUMS: **Rwy 17**, std. with a min. climb of 490' per NM to 11000. **Rwy 35**, std. with a min. climb of 360' per NM to 9000.

DEPARTURE PROCEDURE: Use STACO DEPARTURE.

NOTE: **Rwy 17**, tree 794' from departure end of runway, 277' right of centerline, 35' AGL/4380' MSL. Tree 967' from departure end of runway, 432' right of centerline, 35' AGL/4394' MSL. Tree 1023' from departure end of runway, 313' right of centerline, 35' AGL/4395' MSL.

TUCSON, AZ**MARANA RGNL**

TAKE-OFF MINIMUMS: **Rwys 3, 12**, N/A-Obstacles

DEPARTURE PROCEDURE: **Rwy 21**, climb to 6500 via heading 360° and TUS R-308 to TOTEC Int/TUS 57 DME, then as filed. **Rwy 30**, climb to 6500 via heading 303° intercept TUS R-308 above 3500, to TOTEC INT/TUS 57 DME, then as filed.

NOTE: **Rwy 21**, road 192' from departure end of runway, 527' left of centerline 15' AGL/2034' MSL.

RYAN FIELD

DEPARTURE PROCEDURE: **Rwy 6R**, turn right; **Rwy 24L**, turn left direct to Ryan NDB. Continue climb in holding pattern (W, right turn 090° inbound) to 5000 before proceeding on course.

TUCSON, AZ (CON'T)**TUCSON INTL (TUS)****AMDT 4A 08241 (FAA)**

TAKE-OFF MINIMUMS: **Rwy 3**, 300-1½ or std. w/min. climb of 228' per NM to 3000.

DEPARTURE PROCEDURE: **Rwys 3, 29L, 29R**, climbing right turn direct to TUS VORTAC. **Rwys 11L, 11R** climb via runway heading to 4000 then climbing left turn direct TUS VORTAC. **Rwy 21**, climbing left turn direct to TUS VORTAC. All aircraft continue climbing in holding pattern (NW, right turns, 128° inbound) to depart TUS VORTAC at or above 9000.

NOTE: **Rwy 3**, tower 9215' from departure end of runway, 1689' left of centerline, 246' AGL/2831' MSL.

VERNAL, UT**VERNAL RGNL**

TAKE-OFF MINIMUMS: **Rwy 16**, 1500-2 or std with a min. climb of 250' per NM to 7000'. **Rwy 25**, 1500-2 or std. with a min. climb of 390' per NM to 7000. **Rwy 34**, 1600-2 prstd. with a min. climb of 330' per NM to 7000'.

DEPARTURE PROCEDURE: **Rwys 7, 34**, turn right.

Rwys 16, 25, turn left. All aircraft climb direct VEL. Aircraft departing V391 S-bound climb on course. All others climb in holding pattern (SE, right turns, 322° inbound). Aircraft SW-bound V208 depart VEL at or above 8400', all others depart VEL at or above 9500'. Continue climb on course to MEA or assigned altitude.

WENDOVER, UT**WENDOVER**

TAKE-OFF MINIMUMS: **Rwy 26**, standard with a min. climb of 300' per NM to 7000. **Rwy 30**, NA.

DEPARTURE PROCEDURE: **Rwys 8, 12, 26**, climbing left turn direct BVL VORTAC. Aircraft departing BVL VORTAC R-330 CW R-150 climb on course. All others continue climb in BVL VORTAC holding pattern (Hold NE right turns, 247° inbound) to cross at or above 7400, then climb on course.

WILLCOX, AZ**COCHISE COUNTY**

DEPARTURE PROCEDURE: **Rwy 3**, turn right. **Rwy 21**, turn left. All aircraft climb direct CIE VORTAC.



WINDOW ROCK, AZ

WINDOW ROCK

TAKE-OFF MINIMUMS: **Rwy 2**, 700-2 or std. with a min. climb of 500' per NM to 8000. **Rwy 20**, 600-2 or std. with a min. climb of 260' per NM to 8200.

DEPARTURE PROCEDURE: **Rwy 2**, turn right.

Rwy 20, turn left direct to GUP VORTAC before proceeding on course.

NOTE: **Rwy 2**, terrain 3832' from departure end of runway, 1025' right of centerline, 6926' MSL. Poles 5220' from departure end of runway, 245' right of centerline, 180' AGL/6922' MSL. Tower 7067' from departure end of runway, 3072' left of centerline, 71' AGL/7316' MSL. Terrain 7449' from departure end of runway, 1612' left of centerline, 6991' MSL. Terrain 8776' from departure end of runway, 1851' left of centerline, 7109' MSL. Tree 9665' from departure end of runway, 1326' right of centerline, 7340' MSL. Tree 11326' from departure end of runway, 355' left of centerline, 7351' MSL. **Rwy 20**, trees 1018' from departure end of runway, 620' left of centerline, 30' AGL/6768' MSL.

WINNEMUCCA, NV

WINNEMUCCA MUNI

TAKE-OFF MINIMUMS: **Rwy 2**, 2500-2 or std. with a min. climb of 450' per NM to 6800. **Rwys 14, 20**, 3200-2 or std. with a min. climb of 520' per NM to 7500.

DEPARTURE PROCEDURE: **Rwys 14, 20**, turn right.

Rwy 2, turn left. **Rwy 32**, climb straight ahead. All aircraft climb via INA R-326 to 6700 or above within 12 NM, then climbing left turn return to INA VOR/DME via R-326. Continue climb in INA VOR/DME holding pattern (hold NW, right turns, 146° inbound) to depart INA VOR/DME at or above 11000. Southbound aircraft continue via INA R-146 direct Fesko Int. Northbound aircraft continue via INA R-326 and SDO R-144 direct SDO VORTAC.

YUMA MCAS/ YUMA INTL(KNYL)

YUMA, AZ 09323

Diverse departures not auth between 360° CW 055° from 25 NM to 30 NM.

Rwy 3L: Cross DER at or above 35' AGL/228' MSL.

Diverse departures auth. Fr 083° CW 107°, std with minimum climb of 225'/NM to 3500'.

Rwy 3R: Cross DER at or above 35' AGL/242' MSL.

Diverse departures auth. Fr 083° CW 107°, std with minimum climb of 225'/NM to 3500'.

Rwy 21L: Cross DER at or above 35' AGL/223' MSL.

Diverse departures auth.

Rwy 21R: Cross DER at or above 35' AGL/227' MSL.

Diverse departures auth.

Rwy 8: Cross DER at or above 35' AGL/231' MSL.

Diverse departures auth. Fr 069° CW 123°, std with minimum climb of 230'/NM to 3500'.

Rwy 26: Cross DER at or above 35' AGL/230' MSL.

Diverse departures auth.

Rwy 17: Cross DER at or above 35' AGL/217' MSL.

Diverse departures auth. Fr 068° CW 109°, std with minimum climb of 220'/NM to 3500'.

Rwy 35: Cross DER at or above 35' AGL/231' MSL.

Diverse departures auth.



LOC/DME I-LGU	APP CRS	Rwy Idg	9095
109.15	169°	TDZE	4457
Chan 28 (Y)		Apt Elev	4457



▼

Circling NA east of Rwy 17-35.
Circling to Rwy 10-28 NA at night.
Inoperative table does not apply.

MALSR

MISSED APPROACH: Climb to 5800 then climbing right turn to 14000 via heading 340° and LHO VOR/DME R-357 to FIOB. INT/LHO 19.6 DME and hold, continue climb-in-hold to 14000.

ASOS 135.275	CEDAR CITY RADIO 122.2	UNICOM 122.8 (CTAF) 0
-----------------	---------------------------	--------------------------

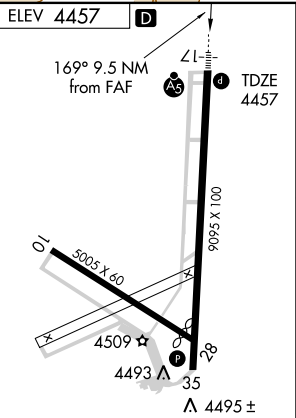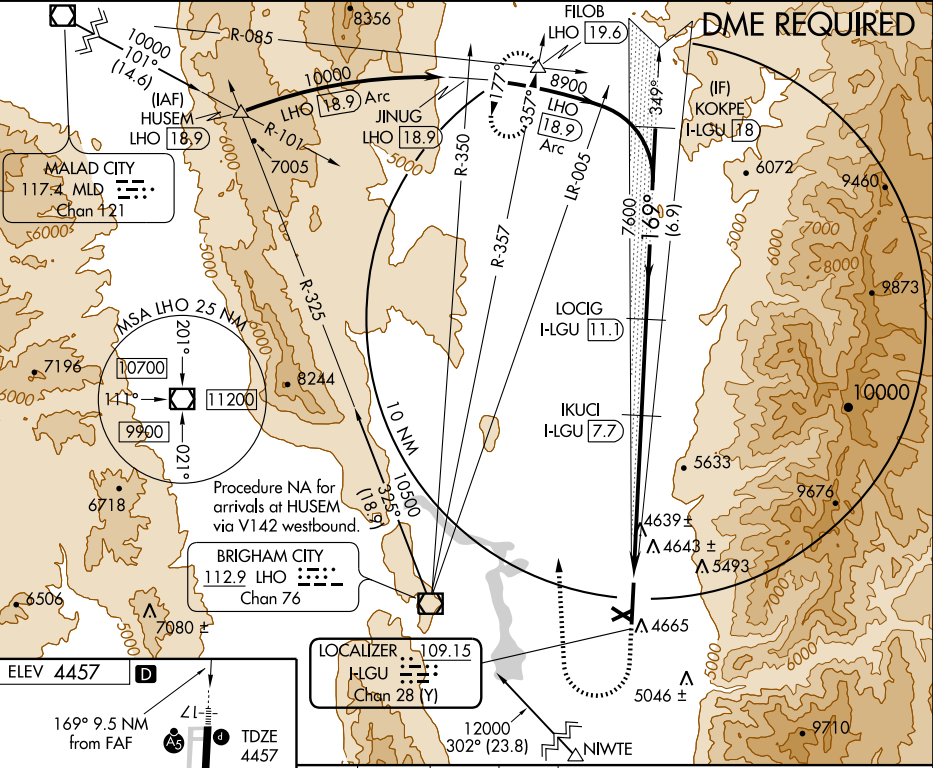

5800 ↑	14000 ↗ 340°	LHO R-357 112.9	FIOB △	Use I-LGU DME when on localizer course.	Procedure Turn NA
VGS1 and ILS glidepath not coincident.				LOCIG I-LGU 11.1	KOKPE I-LGU 18
<p>I-LGU 1.7 I-LGU 2.9 IKUCI I-LGU 7.7 7600 6400* 3.4 NM *LOC only 7600 169° 8900 GS 3.00° TCH 50</p>					
CATEGORY	A		B	C	D
S-ILS 17			4657- ³ / ₄ 200 (200- ³ / ₄)		
S-LOC 17	4900-1	443 (500-1)	4900-1 ¹ / ₄ 443 (500-1 ¹ / ₄)	4900-1 ¹ / ₂ 443 (500-1 ¹ / ₂)	
CIRCLING	4900-1 443 (500-1)	4920-1 463 (500-1)	4920-1 ¹ / ₂ 463 (500-1 ¹ / ₂)	5020-2 563 (600-2)	

MIRL Rwy 17-35 0
REIL Rwy 17 and 35 0

SW-4. 17 DEC 2009 to 14 JAN 2010

ORNEY ONE DEPARTURE (OBSTACLE)


CEDER CITY RADIO
122.2
ASOS 135.275
UNICOM
122.8 (CTAF)

TAKEOFF OBSTACLE NOTES

- RWY 17: Railroad, poles and tree beginning 336' from DER, 220' left of centerline, up to 45' AGL/4495' MSL.
- RWY 35: Railroad beginning 205' from DER, 554' right of centerline, up to 23' AGL/4490' MSL.

BRIGHAM CITY
112.9 LHO
Chan 76
N41°47.57' - W112°00.59'
L-11, H-3

ORNEY
N41°58.70'
W111°53.44'

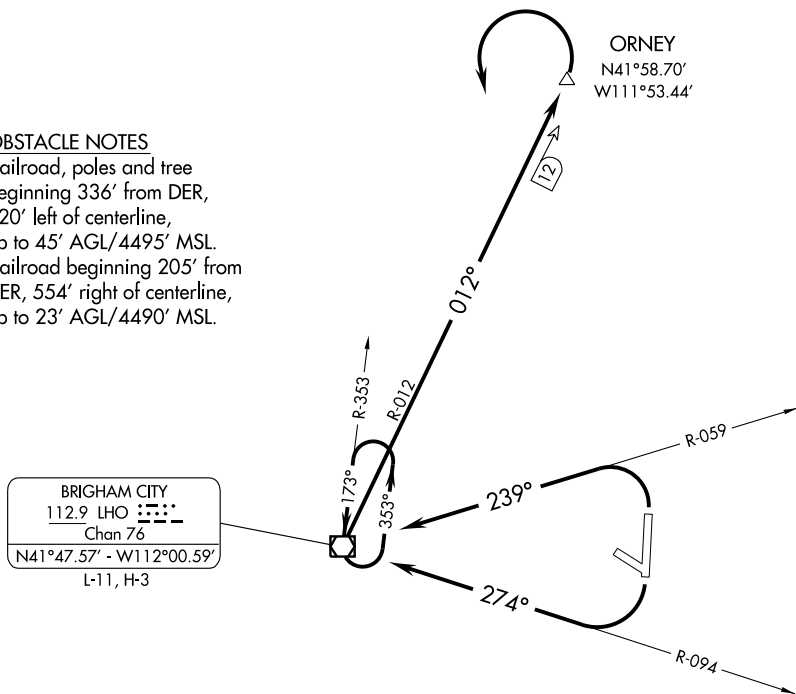

TAKE-OFF MINIMUMS

Rwy 10, 28: NA-obstacles.

Rwy 17: Standard with minimum climb of 276' per NM to 7100', or 4700-3 for climb in visual conditions.

Rwy 35: Standard with minimum climb of 274' per NM to 9500', or 4700-3 for climb in visual conditions.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 17: Climbing right turn to 12000 via LHO VOR/DME R-094 to LHO VOR/DME and right turn via LHO R-012 to ORNEY INT/LHO 12 DME and left turn via LHO R-012 to LHO VOR/DME, thence . . . or for climb in visual conditions, cross Logan-Cache Airport at or above 9000, climb to 12000 via LHO R-077 to LHO VOR/DME, thence . . .

TAKE-OFF RUNWAY 35: Climbing left turn to 12000 via LHO VOR/DME R-059 to LHO VOR/DME and right turn via LHO R-012 to ORNEY INT/LHO 12 DME and left turn via LHO R-012 to LHO VOR/DME, thence . . . or for climb in visual conditions, cross Logan-Cache Airport at or above 9000, climb to 12000 via LHO R-077 to LHO VOR/DME, thence . . .

. . . continue climbing in LHO VOR/DME holding pattern to 12000 before proceeding on course.

APP CRS	Rwy Idg	9095
155°	TDZE	4457
	Apt Elev	4457

RNAV (GPS) RWY 17
LOGAN-CACHE (LGU)

LOGAN-CACHE (LGU)

Circling NA east of Rwy 17-35.
DME/DME RNP-0.3 NA.




MALSR



MISSED APPROACH: Climb to 10000 direct CIIAK and right turn via 261° track to PIMIE and hold, continue climb-in-hold to 10000.

ASOS
135.275

CEDAR CITY RADIO
122.2

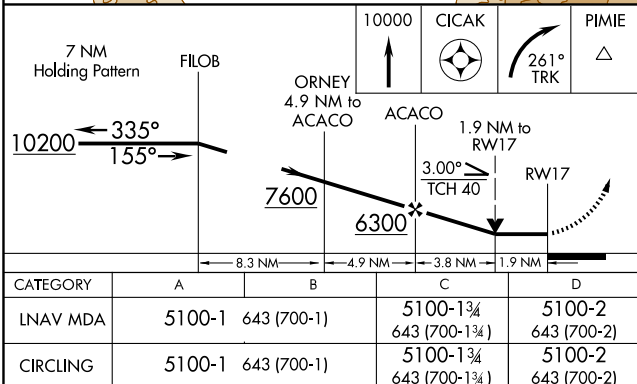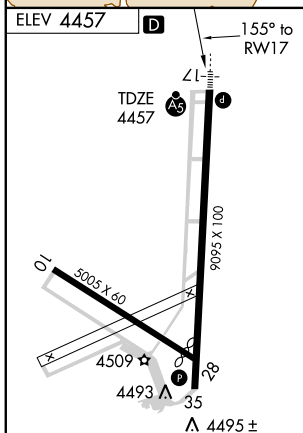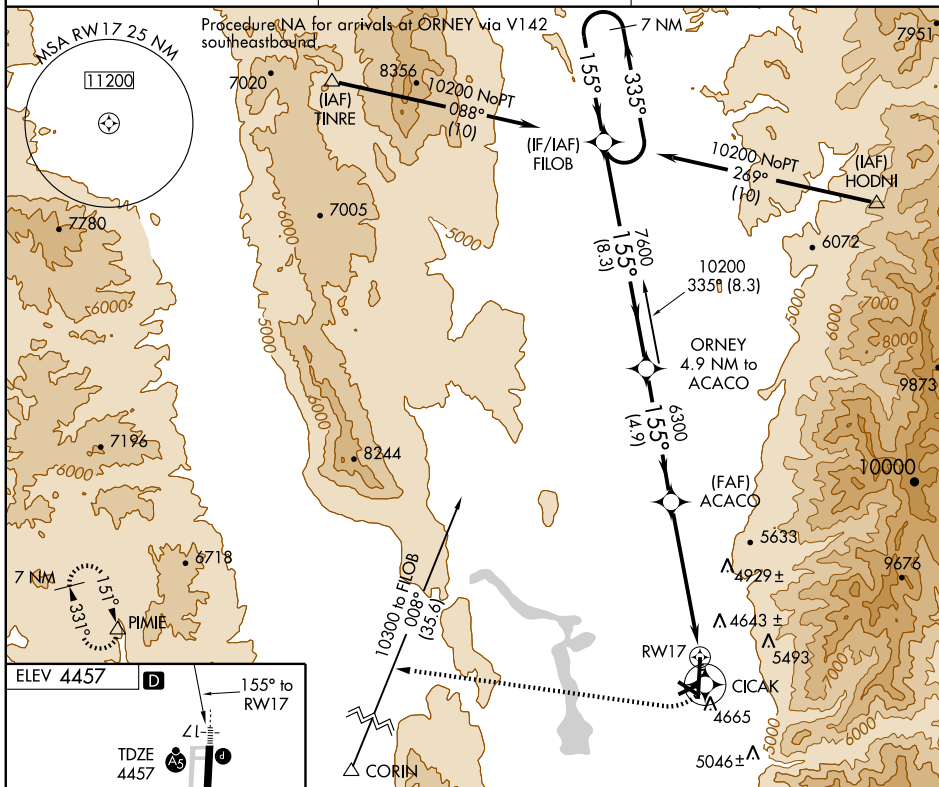UNICOM
122.8 (CTAF) 


MIRL Rwy 17-35 **L**
REIL Rwys 17 and 35 **L**

❖


Circling NA east of Rwy 17-35.
DME/DME RNP- 0.3 NA.

MISSED APPROACH: Climb to 10000 direct WEREV and via 286° track to GUGSE and 246° track to PIMIE and hold, continue climb-in-hold to 10000.

ASOS 135.275	CEDAR CITY RADIO 122.2	UNICOM 122.8 (CTAF) 0
-----------------	---------------------------	--------------------------

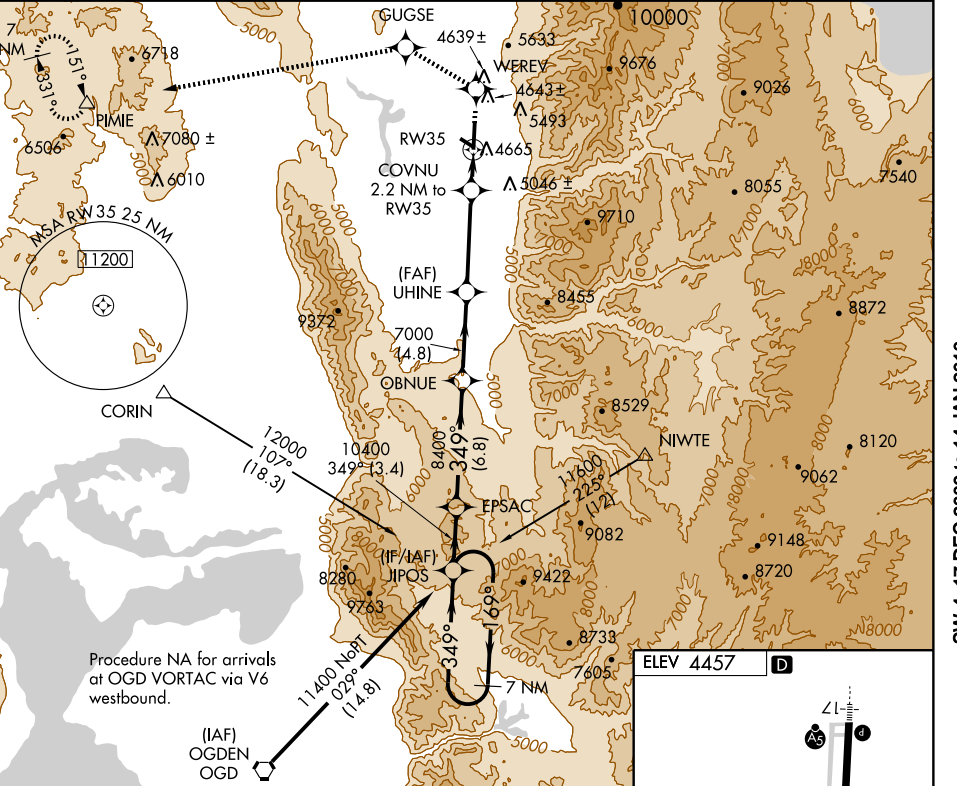

7 NM Holding Pattern		JIPOS	EPSAC	10000	WEREV	GUGSE	PIMIE
					286° TRK		246° TRK
11400 ← 169°		10400	8400	7000	5180		
GS 3.00° TCH 45							
VGSI and RNAV glidepath not coincident.							
→ 3.4 NM → 6.8 NM → 4.8 NM → 5.5 NM → 2.2 NM							
CATEGORY	A	B	C	D			
LPV DA	4746-1		289 (300-1)				
LNAV MDA	5060-1	603 (700-1)	5060-1 3/4 603 (700-1 3/4)	5060-2 603 (700-2)			
CIRCLING	5060-1	603 (700-1)	5060-1 3/4 603 (700-1 3/4)	5060-2 603 (700-2)			

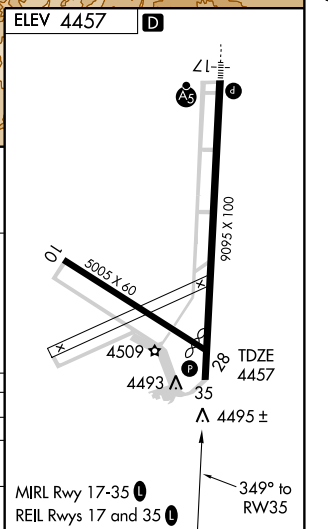

SW-4, 17 DEC 2009 to 14 JAN 2010

VORTAC MLF 112.1 Chan 58	APP CRS 344°	Rwy Idg N/A TDZE N/A Apt Elev 5039
--	------------------------	---

VOR or GPS-A

MILFORD MUNI/BEN AND JUDY BRISCOE FIELD (MLF)




MISSED APPROACH: Climb to 7000 via MLF R-344, then climbing right turn to 9200 via R-007 to MLF VORTAC and hold.

ASOS
135.025


CEDAR CITY RADIO
122.1R

UNICOM
122.8 (CTAF) **L**

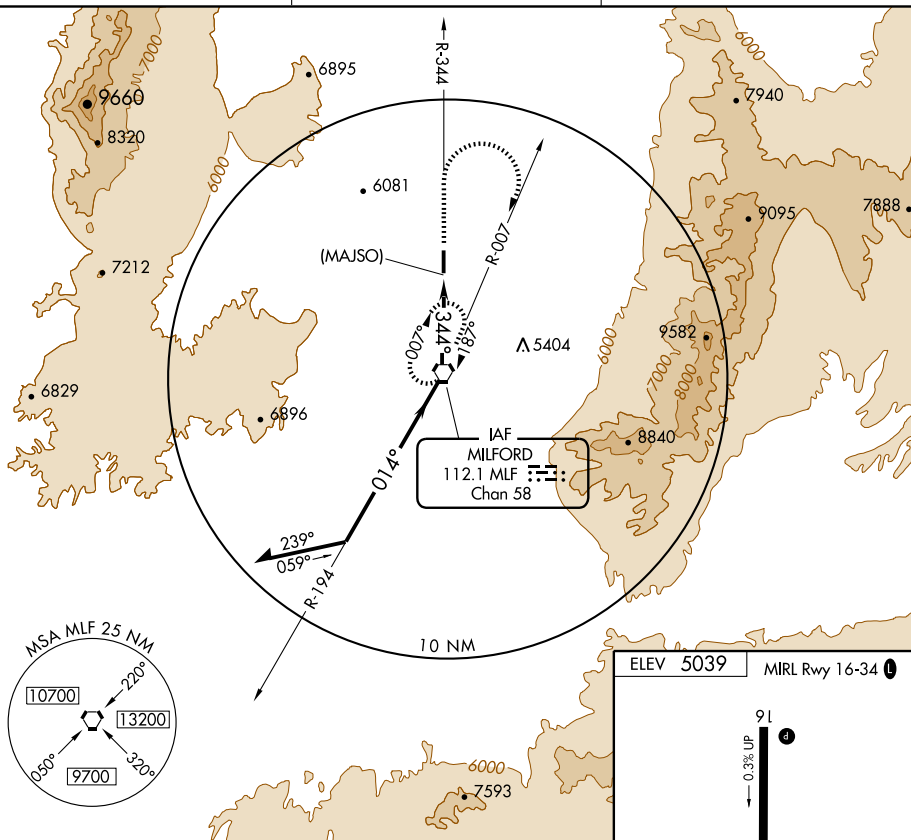


Remain
within 10 NM

VORTAC

7000 ↑ MLF R-344	9200 ↗ MLF R-007	MLF  112.1
------------------------	------------------------	---

(MAJSO)
MLF $\overline{3.5}$

ELEV 5039	MIRL Rwy 16-34 L
-----------	-------------------------



344° 3.5 NM
from FAF

		<div><div></div><div>3.5 NM</div><div></div></div>								
CATEGORY	A	B	C	D	FAF to MAP 3.5 NM					
CIRCLING	5660-1 621 (700-1)	5680-1 641 (700-1)	5700-1 ^{3⁄4} 661 (700-1 ^{3⁄4})	5780-2 1⁄2 741 (800-2 1⁄2)	Knots	60	90	120	150	180
					Min:Sec	3:30	2:20	1:45	1:24	1:10


GPS or RNP-0.3 required. DME/DME RNP-0.3 NA.

Procedure NA when R-6413 in operation.

Procedure NA at night.

MISSED APPROACH: Climbing left turn to 7700 direct HANOG WP and hold.

ASOS 118.525	DENVER CENTER 134.5 327.8	UNICOM 122.8 (CTAF) 1
-----------------	------------------------------	--------------------------

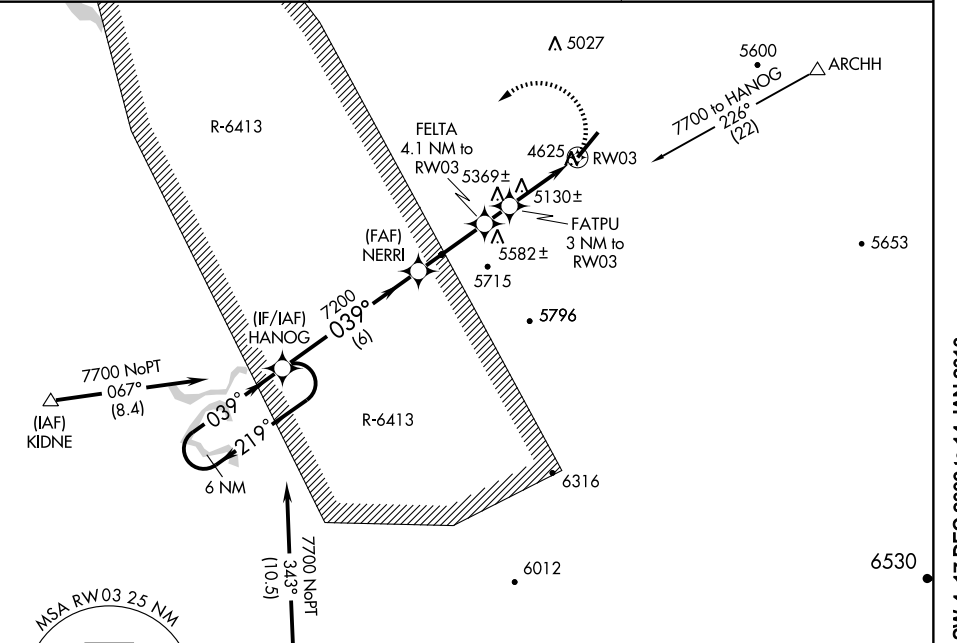

ELEV 4555

D

6 NM Holding Pattern

HANOG

NERRI

FELTA 4.1 NM to RW03

FATPU 3 NM to RW03

RW03

7700

HANOG

7200

6180

5780

3.74° TCH 40

7700x75

TDZE 4551

039° to RW03

VGSI and descent angles not coincident

6 NM

2.9 NM

1.1 NM

3 NM

CATEGORY	A	B	C	D
LNAV MDA	5380-1 829 (900-1)	5380-1¼ 829 (900-1¼)	5380-2½ 829 (900-2½)	5380-2¾ 829 (900-2¾)
CIRCLING	5380-1 825 (900-1)	5380-1¼ 825 (900-1¼)	5380-2½ 825 (900-2½)	5440-3 885 (900-3)

REIL Rwy 3 and 21 1

MIRL Rwy 3-21 1

SW-4. 17 DEC 2009 to 14 JAN 2010



▼

▲ NA

Procedure not authorized when R-6413 in operation.

MISSED APPROACH: Climb to 6100 then climbing right turn to 7100 direct OAB VOR/DME and hold.

ASOS 118.525	DENVER CENTER 134.5 327.8	UNICOM 122.8 (CTAF) 1
-----------------	------------------------------	--------------------------

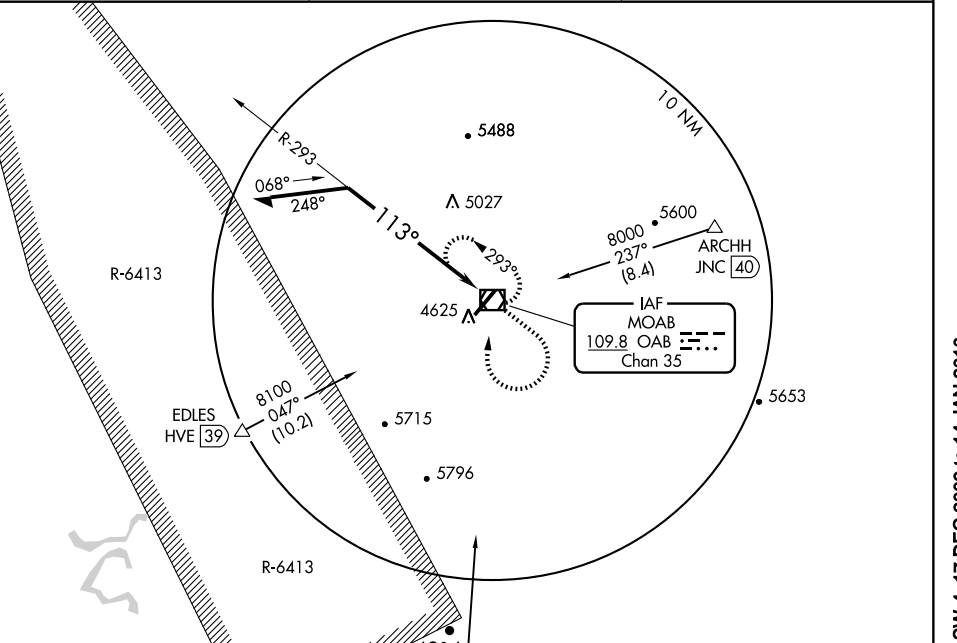

Remain within 10 NM

7000

293°

113°

* VOR/DME

6100

7100

OAB

109.8

* Maintain 7100 or above until established outbound for procedure turn.

ELEV 4555

D

113° to VOR/DME

7100 X 75

4622

CATEGORY	A	B	C	D
CIRCLING	5500-1¼ 945 (1000-1¼)		5500-2¾ 945 (1000-2¾)	5500-3 945 (1000-3)

REIL Rwy 3 and 21 1

MIRL Rwy 3-21 1

SW-4, 17 DEC 2009 to 14 JAN 2010

08269

AIRPORT DIAGRAM

AFD-296 [USAF]

HILL AFB (KHIF)

OGDEN, UTAH

ATIS 134.925 397.9

HILL TOWER


127.15 263.15

GND CON

121.6 275.8

CLNC DEL

124.1 335.8

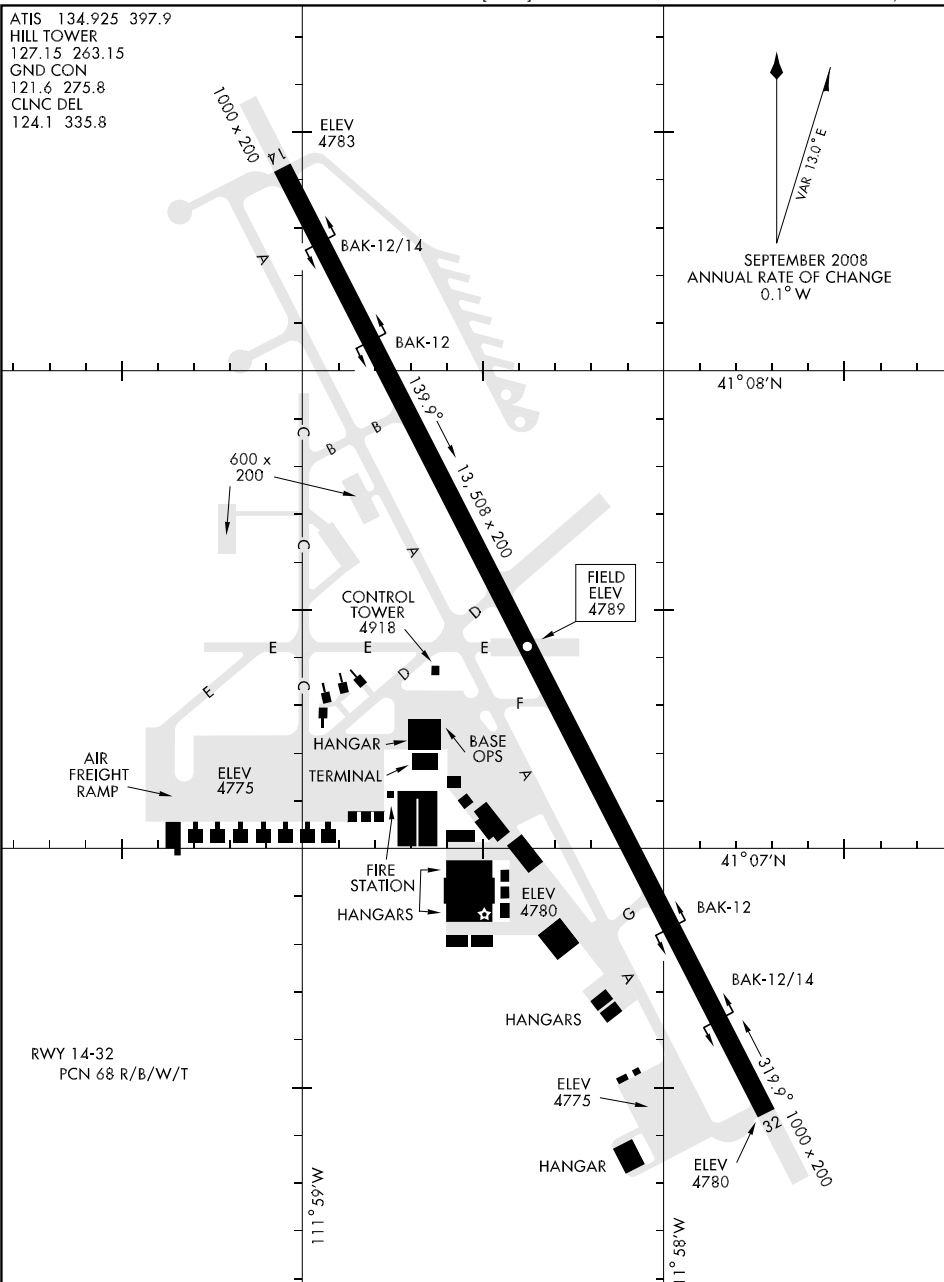

RWY 14-32
PCN 68 R/B/W/T


SW-4, 17 DEC 2009 to 14 JAN 2010

ATIS 134.925 397.9
 CLNC DEL
 124.1 335.8
 GND CON
 121.6 275.8
 HILL TOWER
 127.15 263.15
 SALT LAKE CITY
 DEP CON
 121.1 319.25
 CLOVER CON
 134.1 285.65

Rwy	Knots	60	120	180	240	300	360
14	V/V(fpm)	2095	4190	6285	8380	10475	12570
32	V/V(fpm)	4610	9220	13830	18440	23050	27660

ATC Climb Rate to 5200

AIRSPED IN EXCESS OF 350 KIAS NOT
 AUTHORIZED UNTIL ESTABLISHED:
 RWY 14 HEADING 290°
 RWY 32 HEADING 200°

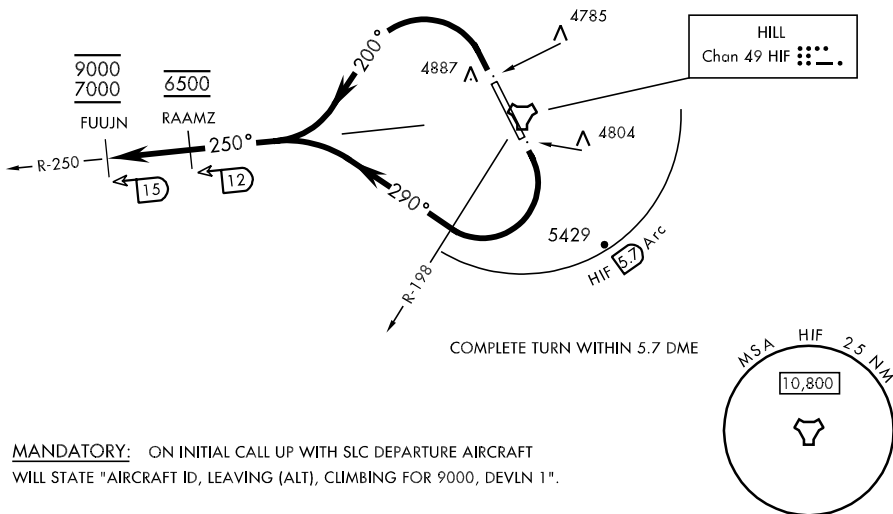

MANDATORY: ON INITIAL CALL UP WITH SLC DEPARTURE AIRCRAFT
 WILL STATE "AIRCRAFT ID, LEAVING (ALT), CLIMBING FOR 9000, DEVLN 1".

EMERG SAFE ALT 100 NM 15,600

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 14: Turn right heading 290°, remain within HIF TACAN 5.7 DME until passing the HIF R-198 and established on a heading greater than 256°, intercept HIF R-250 outbound prior to HIF 12 DME, cross RAAMZ at 6500, climb and maintain 7000 block 9000.


TAKE-OFF RWY 32: Turn left heading 200°, intercept HIF TACAN R-250 outbound prior to HIF 12 DME, cross RAAMZ at 6500, climb and maintain 7000 block 9000.

ATIS 134.925 397.9
 CLNC DEL
 124.1 335.8
 GND CON
 121.6 275.8
 HILL TOWER
 127.15 263.15
 SALT LAKE CITY
 DEP CON
 121.1 319.25
 CLOVER CON
 134.1 285.65

Rwy	Knots	60	120	180	240	300	360
14	V/V(fpm)	2095	4190	6285	8380	10475	12570
32	V/V(fpm)	4610	9220	13830	18440	23050	27660

ATC Climb Rate to 5200

AIRSPED IN EXCESS OF 350 KIAS NOT
 AUTHORIZED UNTIL ESTABLISHED:
 RWY 14 HEADING 290°
 RWY 32 HEADING 200°

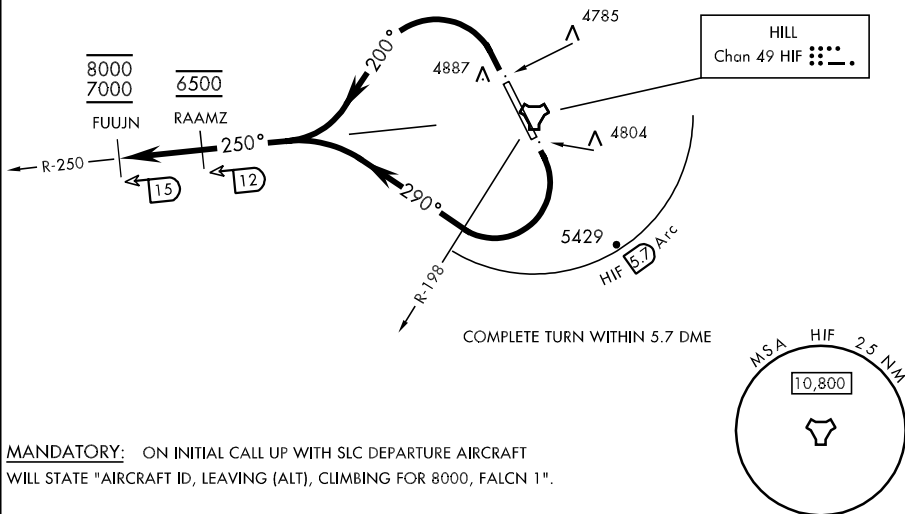

MANDATORY: ON INITIAL CALL UP WITH SLC DEPARTURE AIRCRAFT
 WILL STATE "AIRCRAFT ID, LEAVING (ALT), CLIMBING FOR 8000, FALCN 1".

EMERG SAFE ALT 100 NM 15,600

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 14: Turn right heading 290°, remain within HIF TACAN 5.7 DME until passing the HIF R-198 and established on a heading greater than 256°, intercept HIF R-250 outbound prior to HIF 12 DME, cross RAAMZ at 6500, climb and maintain 7000 block 8000.

TAKE-OFF RWY 32: Turn left heading 200°, intercept HIF TACAN R-250 outbound prior to HIF 12 DME, cross RAAMZ at 6500, climb and maintain 7000 block 8000.

FREMONT 1 (VECTOR) DP (FRMNT1 • FRMNT)

OGDEN, UTAH



ATIS 134.925 397.9
CLNC DEL
124.1 335.8
GND CON
121.6 275.8
HILL TOWER
127.15 263.15
SALT LAKE CITY
DEP CON
121.1 319.25
CLOVER CON
134.1 285.65

SHL-296 [USAF]

Rwy	Knots	60	120	180	240	300	360
14 (a)	V/V(fpm)	580	1160	1740	2320	2900	3480
14 (b)	V/V(fpm)	260	520	780	1040	1300	1560

ATC Climb Rate

- (a) To 5200
- (b) From 5200 to 6300

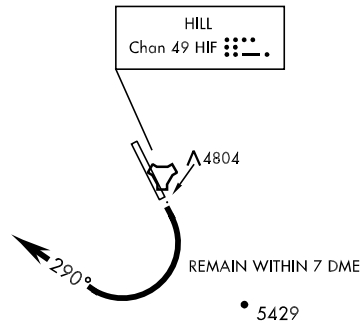

LOST COMMUNICATIONS: IF RADIO CONTACT HAS NOT BEEN ESTABLISHED
BY HIF R-225 OR 12 DME, SQUAWK 7600 AND IMMEDIATELY
CLIMB TO 7500 MSL.

EMERG SAFE ALT 100 NM 15,600



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 14: Turn right heading 290°, remain within 7 DME, maintain 6500.


TACAN OUT: Turn right heading 290°, maintain 6500.

SW-4, 17 DEC 2009 to 14 JAN 2010

HILL AFB (KHIF)

MISSED APPROACH: To 5500, then climbing right turn to 7900 out HIF R-248 to GRITS and hold.


CLNC DEL
124.1 335.8

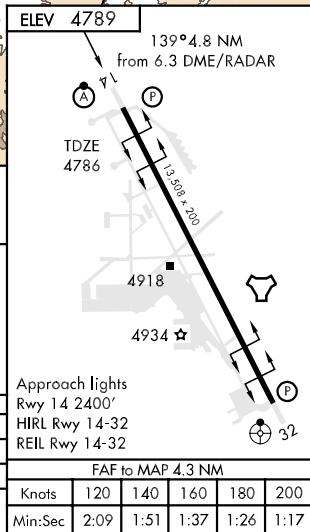


TACAN HIF Chan 49	APCH CRS 131°	Rwy Idg 13,508 TDZE 4786 Arprt Elev 4789	JAL-296 [USAF]	HILL AFB (KHIF)
-----------------------------	-------------------------	---	----------------	-----------------

<p>▼ *When ALS inop, increase CAT C RVR to 50 and vis to 1 mile, CAT DE RVR to 60 and vis to 1½ miles.</p> <p>**Circling not authorized NE of Rwy 14-32.</p>	<p>ALSF-2</p>	<p>MISSED APPROACH: To 5500, then climbing right turn to 7900 out HIF R-248 to GRITS and hold.</p>
--	---------------	--

<p>ATIS ★</p> <p>134.925 397.9</p>	<p>SALT LAKE CITY APP CON</p> <p>121.1 319.25</p>	<p>HILL TOWER</p> <p>127.15 263.15</p>	<p>GND CON</p> <p>121.6 275.8</p>	<p>CLNC DEL</p> <p>124.1 335.8</p>
---	--	---	--	---

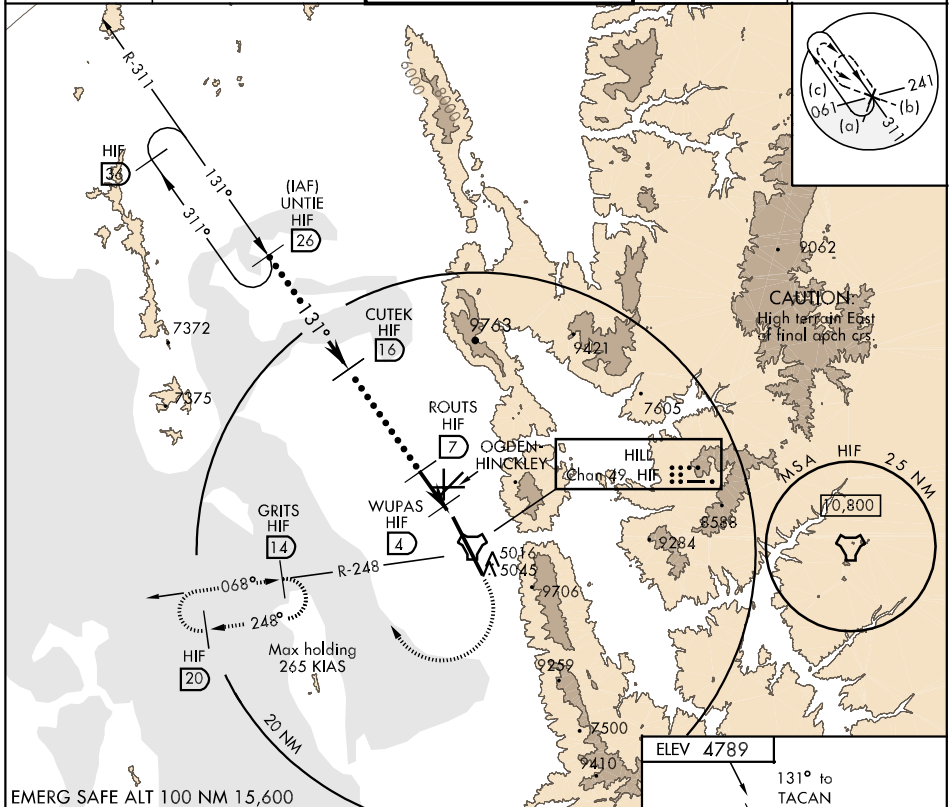

EMERG SAFE ALT 100 NM 15,600				
<p>UNTIE</p> <p>26</p> <p>FL180 14,000</p> <p>131°</p> <p>9000 8000</p> <p>3.24° TCH 59</p>	<p>CUTEK</p> <p>16</p> <p>6300</p>	<p>ROUTS</p> <p>7</p> <p>5700</p>	<p>WUPAS</p> <p>4</p> <p>4.9 NM</p>	<p>JESGO</p> <p>2.1</p> <p>5500 7900</p> <p>VGSI and descent angle not coincident</p>
CATEGORY	C	D	E	
S-14 *	5140/40	354	(400-34)	
CIRCLING **	5240-1½ 451 (500-1½)	5340-2	551 (600-2)	

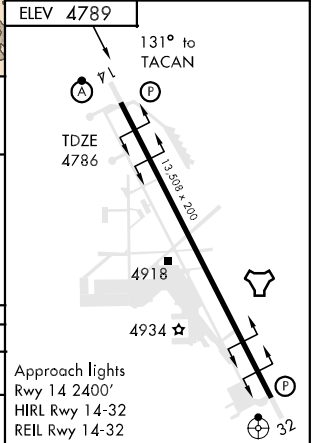

TACAN Chan 49	APCH CRS 332°	Rwy ldg TDZE Arpt Elev 4789
-------------------------	-------------------------	--

JAL-296 [USAF]

HILL AFB (KHIF)

⚠ *Circling not authorized E of Rwy 14-32.


CAUTION: High terrain East of final apch crs.

ODALS




MISSED APPROACH: Climbing left turn to 8400 out HIF R-295 to BRESS and hold.

ATIS 134.925 397.9	SALT LAKE CITY APP CON 121.1 319.25	HILL TOWER 127.15 263.15	GND CON 121.6 275.8	CLNC DEL 124.1 335.8
------------------------------	---	------------------------------------	-------------------------------	--------------------------------

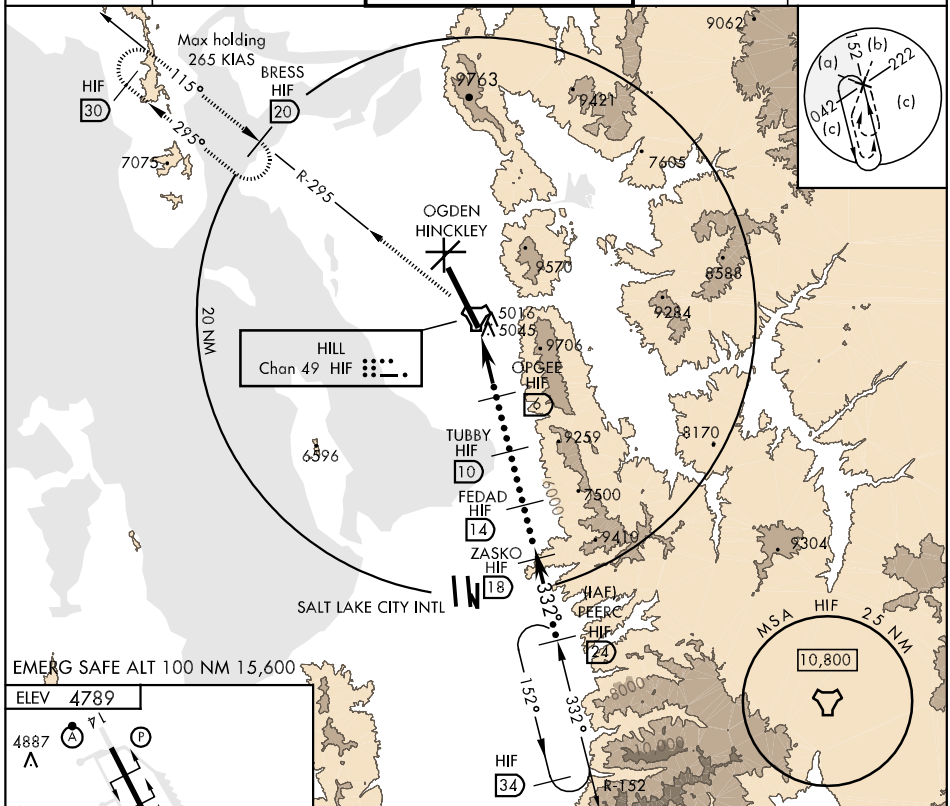

EMERG SAFE ALT 100 NM 15,600

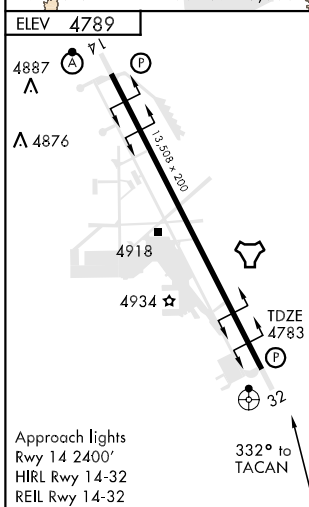

Approach lights
Rwy 14 2400'
HIRL Rwy 14-32
REIL Rwy 14-32

OGDEN, UTAH
Amdt 2 06271

8400 HIF R-295	BRESS HIF 20	VGSI and descent angle not coincident.		PEERC R-152 24
TACAN	FIKAP 1.4	OPGEE 6	TUBBY 10	FEDAD 14
			ZASKO 18	HAEL 24
				15,000 14,000
				10000
				3.55 TCH 52
CATEGORY	C	D	E	
S-32	5240/50 457 (500-1)	5240/60	457	(500-1½)
CIRCLING *	5240-1½ 451 (500-1½)	5340-2	551	(600-2)

41°07'N-111°58'W


HILL AFB (KHIF)

ATIS 134.925 397.9
 CLNC DEL
 124.1 335.8
 GND CON
 121.6 275.8
 HILL TOWER
 127.15 263.15
 SALT LAKE CITY
 DEP CON
 121.1 319.25
 CLOVER CON
 134.1 285.65


Rwy	Knots	60	120	180	240	300	360
14 (a) V/V(fpm)	580	1160	1740	2320	2900	3480	
14 (b) V/V(fpm)	260	520	780	1040	1300	1560	
32 (c) V/V(fpm)	660	1320	1980	2640	3300	3960	

ATC Climb Rate

- (a) To 5200
- (b) From 5200 to 6300
- (c) To 5700

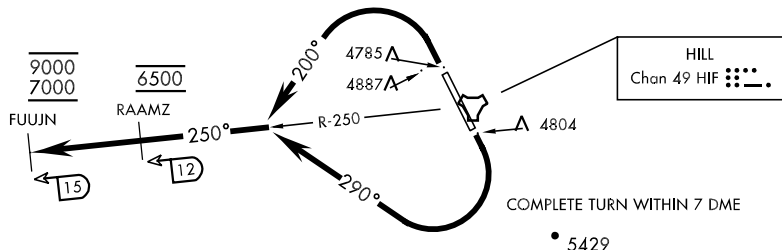

AIRSPEED IN EXCESS OF 350 KIAS NOT
 AUTHORIZED UNTIL ESTABLISHED:
 RWY 14 HEADING 290°
 RWY 32 HEADING 200°



EMERG SAFE ALT 100 NM 15,600



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 14: Turn right heading 290°, intercept HIF R-250 outbound prior to 12 DME (complete turn within 7 DME), cross RAAMZ at 6500, maintain block 7000 through 9000.

TAKE-OFF RWY 32: Turn left heading 200°, intercept HIF R-250 outbound prior to 12 DME, cross RAAMZ at 6500, maintain block 7000 through 9000.

LOC I-HIF 109.9	APCH CRS 139°	Rwy ldg 13,508 TDZE 4786 Arpt Elev 4789
---------------------------	-------------------------	--

AL-296 [USAF]


HILL AFB (KHIF)

▼ * When ALS inop, increase RVR to 40 and vis to ¾ mile.
 ** When ALS inop, increase RVR to 50 and vis to 1 mile.
 *** Circling not authorized in sector NE of Rwy 14-32.



ALSF-2

MISSED APPROACH: To 5500, then climbing right turn to 7900 out HIF R-248 to GRITS and hold.

ATIS 134.925 397.9	SALT LAKE CITY APP CON 121.1 319.25	HILL TOWER 127.15 263.15	GND CON 121.6 275.8	CLNC DEL 124.1 335.8
------------------------------	---	------------------------------------	-------------------------------	--------------------------------

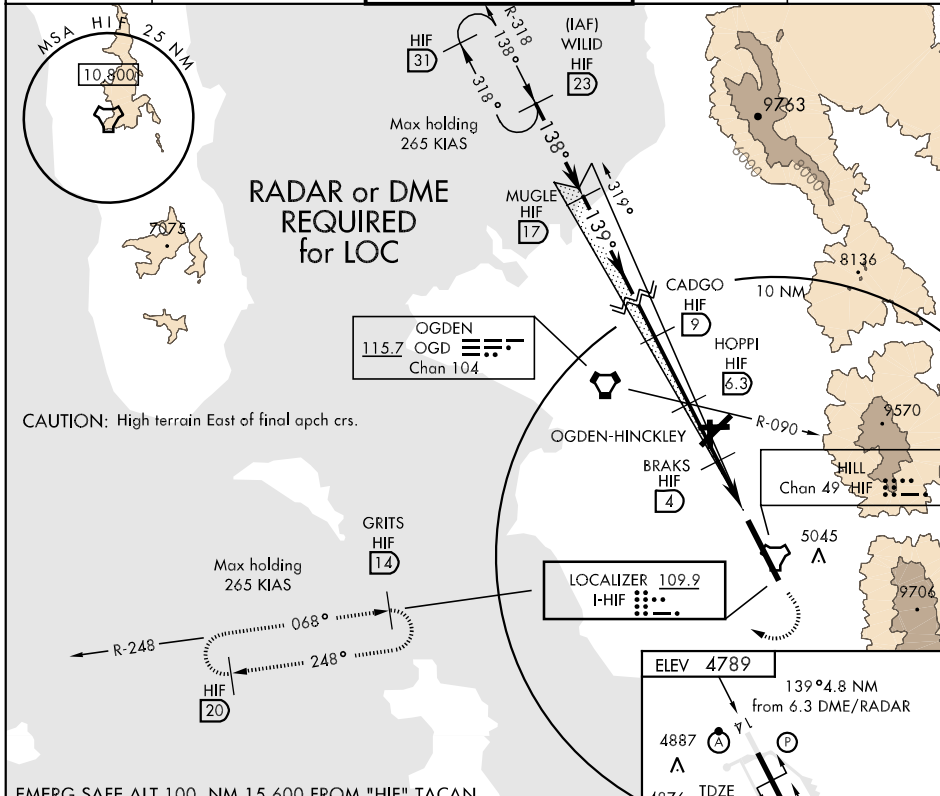

EMERG SAFE ALT 100 NM 15,600 FROM "HIF" TACAN

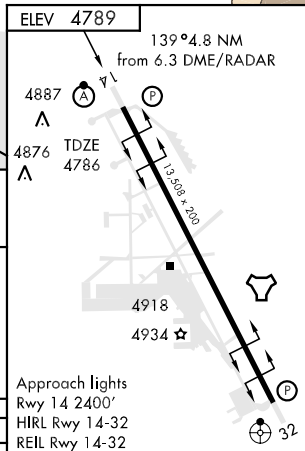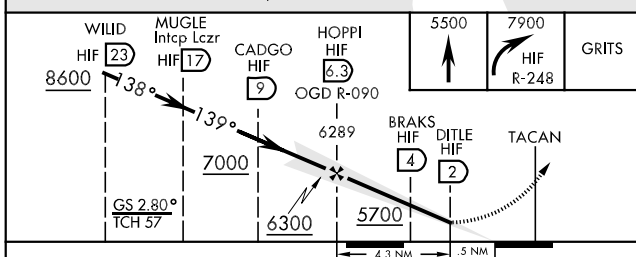

CATEGORY	A	B	C	D	E
S-ILS 14 *	4986/24 200 (200-½)				
S-LOC 14 **	5040/24 254 (300-½)	5040/40 254 (300-¾)			
CIRCLING ***	5240-1 451 (500-1)	5240-1½ 451 (500-1½)	5340-2 551 (600-2)		

FAF to MAP 4.3 NM					
Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26


LOC I-HIF 109.9	APCH CRS 139°	Rwy ldg 13,508 TDZE 4786 Arpt Elev 4789
---------------------------	-------------------------	--

AL-296 [USAF]

HILL AFB (KHIF)

<p>▼ * When ALS inop, increase RVR to 40 and vis to ¾ mile. ** When ALS inop, increase RVR to 50 and vis to 1 mile. *** Circling not authorized in sector NE of Rwy 14-32.</p>	<p>ALSF-2</p>	<p>MISSED APPROACH: To 5500, then climbing right turn to 7900, track 285° intercept OGD R-209 to GRITS and hold.</p>
--	---------------	--

ATIS 134.925 397.9	SALT LAKE CITY APP CON 121.1 319.25	HILL TOWER 127.15 263.15	GND CON 121.6 275.8	CLNC DEL 124.1 335.8
------------------------------	---	------------------------------------	-------------------------------	--------------------------------

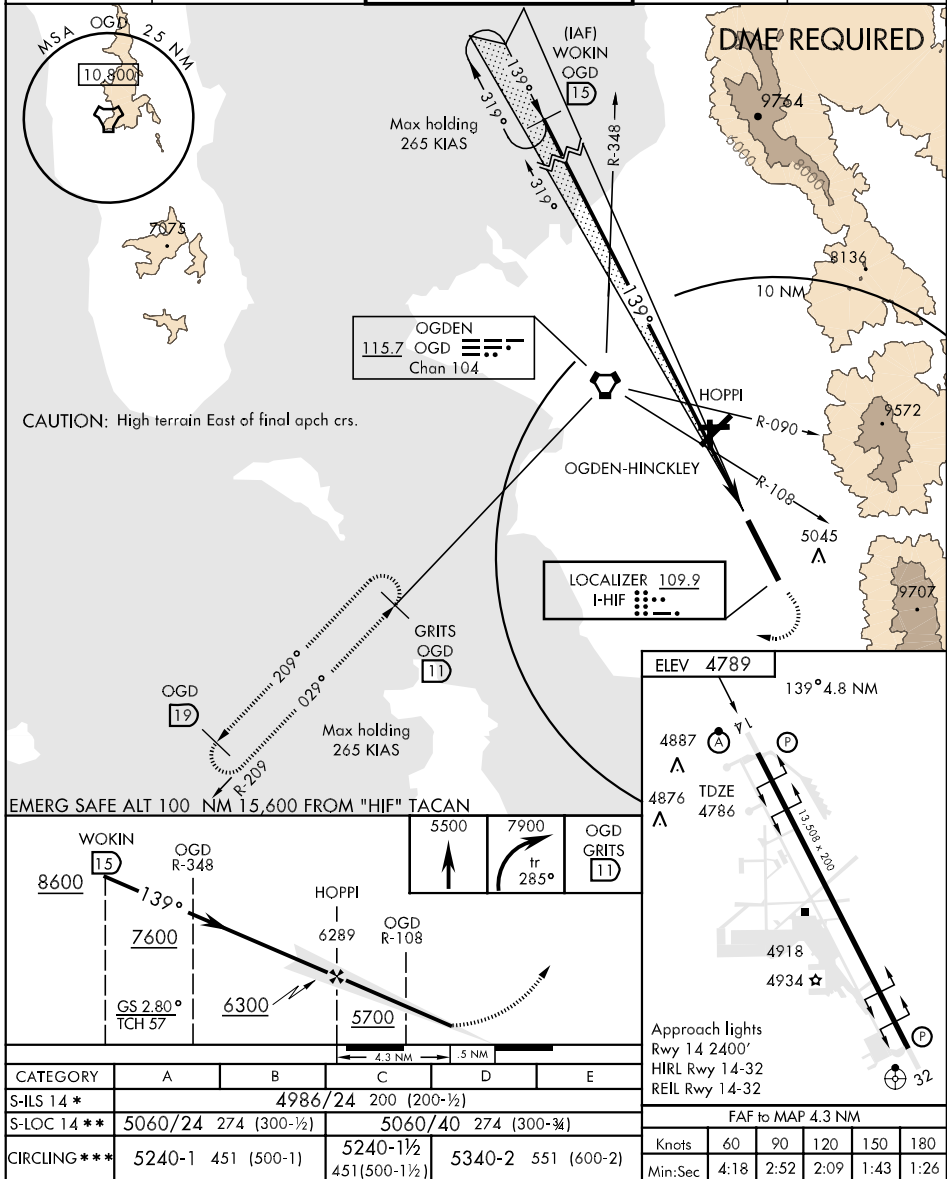

TACAN HIF Chan 49	APCH CRS 131°	Rwy ldg 13,508 TDZE 4786 Arpt Elev 4789
----------------------	------------------	--

AL-296 [USAF]


HILL AFB (KHIF)

▼ * When ALS inop, increase CAT ABC RVR to 50 and vis to 1 mile, CAT DE RVR to 60 and vis to 1½ miles.
** Circling not authorized in sector NE of Rwy 14-32.


ALSF-2
ALS

MISSED APPROACH: To 5500, then climbing right turn to 7900 out HIF R-248 to GRITS and hold.


ATIS 134.925 397.9	SALT LAKE CITY APP CON 121.1 319.25	HILL TOWER 127.15 263.15	GND CON 121.6 275.8	CLNC DEL 124.1 335.8
------------------------------	---	------------------------------------	-------------------------------	--------------------------------

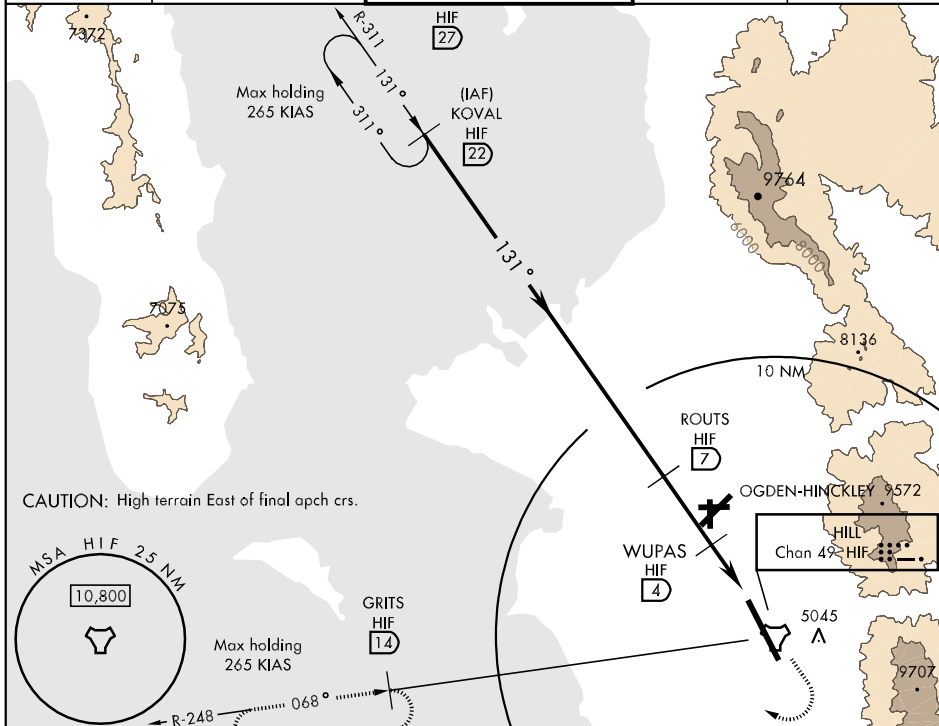

EMERG SAFE ALT 100 NM 15,600 FROM "HIF" TACAN

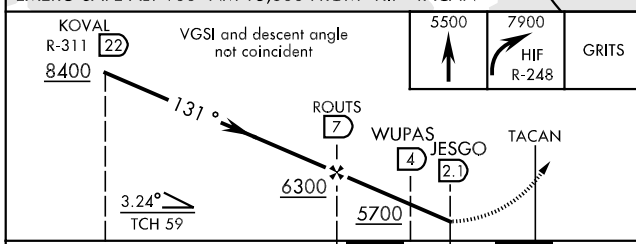

CATEGORY	A	B	C	D	E
S-14 *	5140/24 354 (400-½)		5140/40 354 (400-¾)		
CIRCLING**	5240-1 451 (500-1)		5240-1½ 451(500-1½)	5340-2 551 (600-2)	

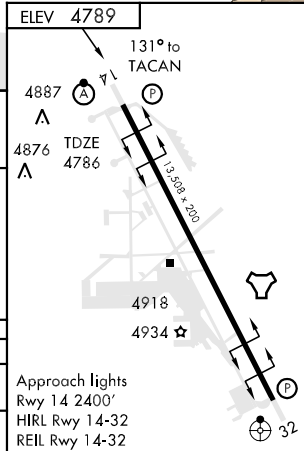

WILLARD 1 (VECTOR) DP (WLLRD1 • WLLRD)

FILE 7-10 (RNM)

OGDEN, UTAH

SHL-296 [USAF]

Rwy	Knots	60	120	180	240	300	360
32	V/V(fpm)	660	1320	1980	2640	3300	3960

ATIS 134.925 397.9

CLNC DEL

124.1 335.8

GND CON

121.6 275.8

HILL TOWER

127.15 263.15

SALT LAKE CITY


DEP CON

121.1 319.25


CLOVER CON

134.1 285.65

ATC Climb Rate to 5700

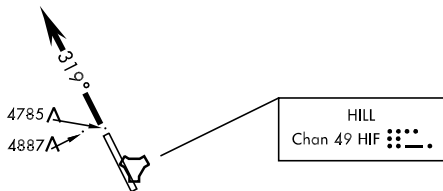

• 5429



EMERG SAFE ALT 100 NM 15,600




DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 32: Track heading 319°, maintain 7000.

AIRPORT DIAGRAM

AL-297 (FAA)

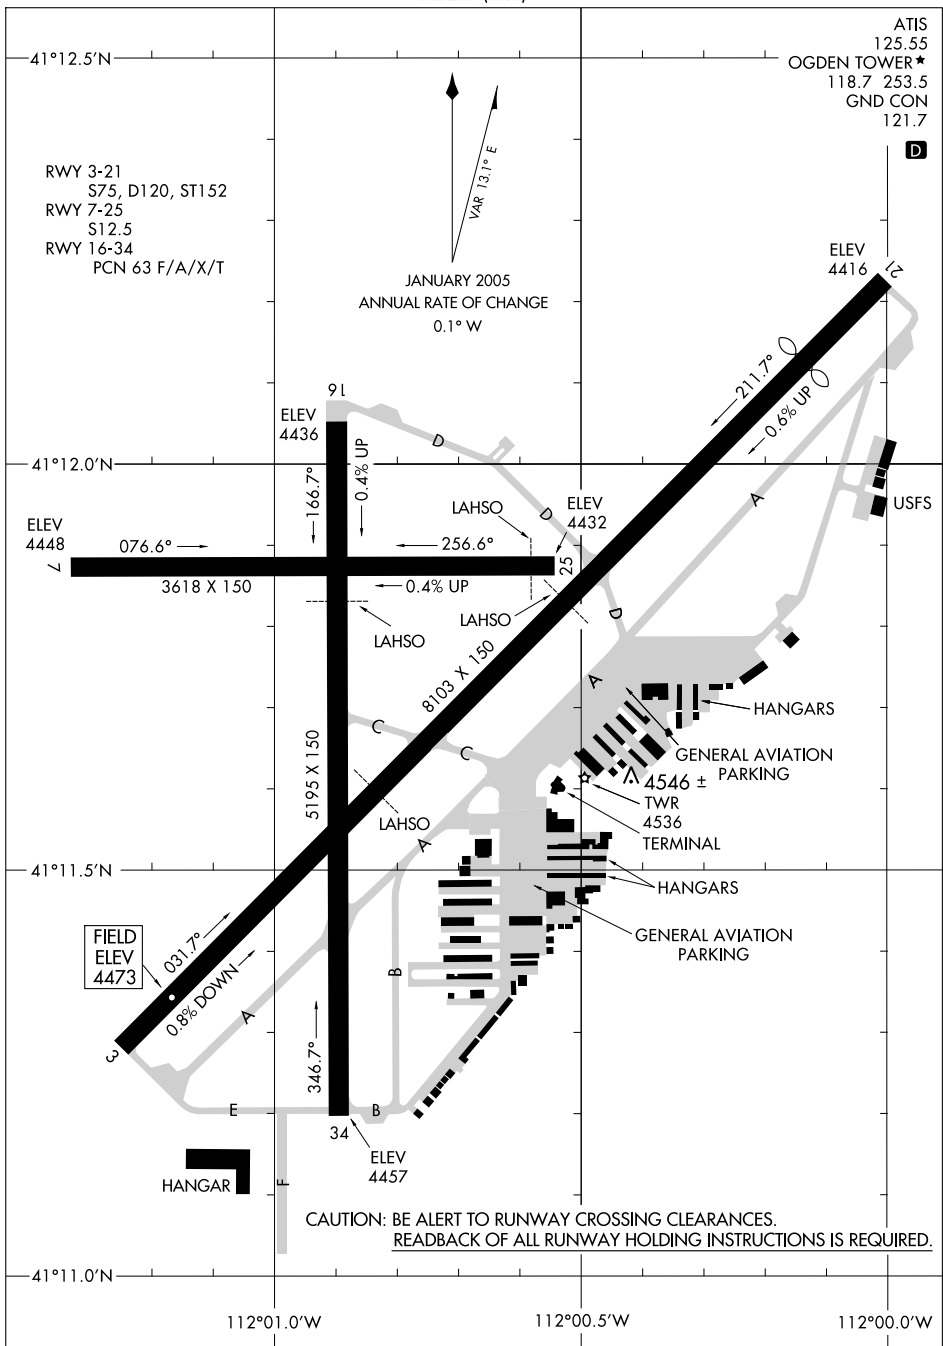OGDEN-HINCKLEY (OGD)
OGDEN, UTAH


SW-4, 17 DEC 2009 to 14 JAN 2010

TAKE-OFF OBSTACLE NOTES

- Rwy 3: Multiple trees beginning 376' from DER, 62' left of centerline, up to 42' AGL/4451' MSL.
Tree 430' from DER, 503' right of centerline, 46' AGL/4455' MSL.
Flagpole 348' from DER, 583' right of centerline, 42' AGL/4451' MSL.
Lightpole 241' from DER, 535' left of centerline, 38' AGL/4447' MSL.
Pole 628' from DER, 611' right of centerline, 45' AGL/ 4454' MSL.
OL on DME 195' from DER, 268' right of centerline, 17' AGL/ 4426' MSL.
Road 231' from DER, 470' right of centerline, 14' AGL/ 4423' MSL.
Lightpole 396' from DER, 385' right of centerline, 16' AGL/ 4425' MSL.
Road 158' from DER, 307' left of centerline, 10' AGL/4419' MSL.
- Rwy 21: Multiple trees and poles beginning 702' from DER, 6' left of centerline, up to 98' AGL/4570' MSL.
Multiple trees beginning 2001' from DER, 421' right of centerline, up to 89' AGL/ 4561' MSL.
Rod on building 2465' from DER, 858' left of centerline, 62' AGL/4541' MSL.
- Rwy 25: Multiple trees and bushes beginning 188' from DER, 244' left of centerline, up to 81' AGL/ 4528' MSL.
Tank 1229' from DER, 566' left of centerline, 64' AGL/4494' MSL.
Lightpole 1038' from DER, 69' left of centerline, 31' AGL/ 4478' MSL.
Lightpole 942' from DER, 30' right of centerline, 30' AGL/ 4477' MSL.
Bush 202' from DER, 80' right of centerline, 8' AGL/ 4455' MSL.
- Rwy 34: Multiple trees beginning 210' from DER, 186' left of centerline, up to 11' AGL/4447' MSL.
Multiple trees beginning 293' from DER, 87' right of centerline, up to 43' AGL/4479' MSL.

ATIS 125.55
GND CON
121.7
OGDEN TOWER ★
118.7 253.5
SALT LAKE CITY DEP CON
121.1 319.25

OGDEN
115.7 OGD
Chan 104
N41°13.45'-W120°05.90'

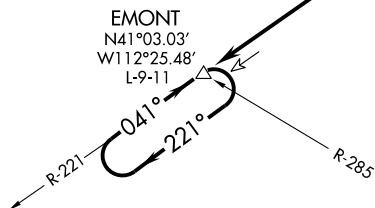

TAKE-OFF MINIMUMS

- Rwy 7, 16: NA- obstacles.
Rwys 21, 25, 34: Standard.
Rwy 3: Standard with minimum climb of 356' per NM to 6100 or, 4100-3 for climb in visual conditions.

WASATCH
116.8 TCH
Chan 115

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 3: Climbing left turn direct OGD VORTAC then via OGD R-221 to EMONT INT/ OGD 18 DME, thence.... Or, climb in visual conditions to cross OGD VORTAC southwest bound at or above 8500, then on OGD R-221 to EMONT INT/ OGD 18 DME, thence....

TAKE-OFF RUNWAY 21: Climbing right turn heading 250° to intercept OGD R-221 to EMONT INT/ OGD 18 DME, thence....

TAKE-OFF RUNWAY 25: Climb heading 256° to intercept OGD R-221 to EMONT INT/ OGD 18 DME, thence....

TAKE-OFF RUNWAY 34: Climbing left turn direct OGD VORTAC then via OGD R-221 to EMONT INT/ OGD 18 DME, thence....

....Climb in EMONT INT holding pattern to MEA/MCA for assigned route of flight.




LOC/DME I-OGD	APP CRS	Rwy Idg	7252
111.7	031°	TDZE	4473
Chan 54		Apt Elev	4473

ILS or LOC RWY 3 OGDEN-HINCKLEY (OGD)

▼ When VGSI inoperative, circling Rwy 7 and 16 NA at night.
▲ DME or RADAR required.
 Inoperative table does not apply to S-ILS-3 and S-LOC-3 Cat C.
 When local altimeter setting not received, use Hill AFB altimeter setting.

MALS
 MISSED APPROACH: Climb to 4900, then climbing left turn to 6000 direct OGD VORTAC, then climb to 13000 via OGD R-263 to MOINT INT/OGD 15.1 DME and hold, continue climb-in-hold to 13000.

ATIS 125.55	SALT LAKE CITY APP CON 121.1 319.25	OGDEN TOWER★ 118.7 (CTAF) 253.5	GND CON 121.7	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

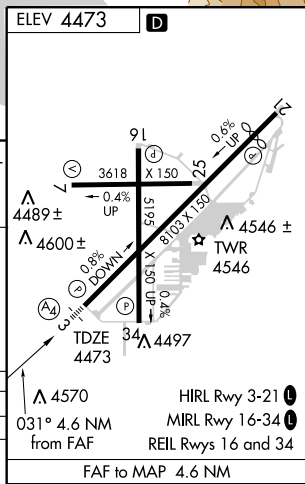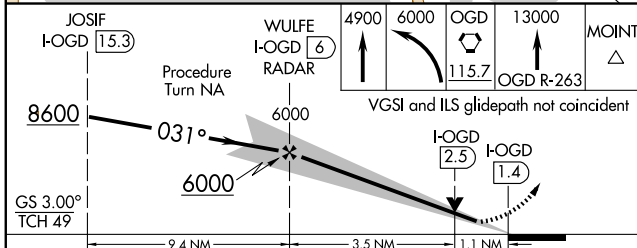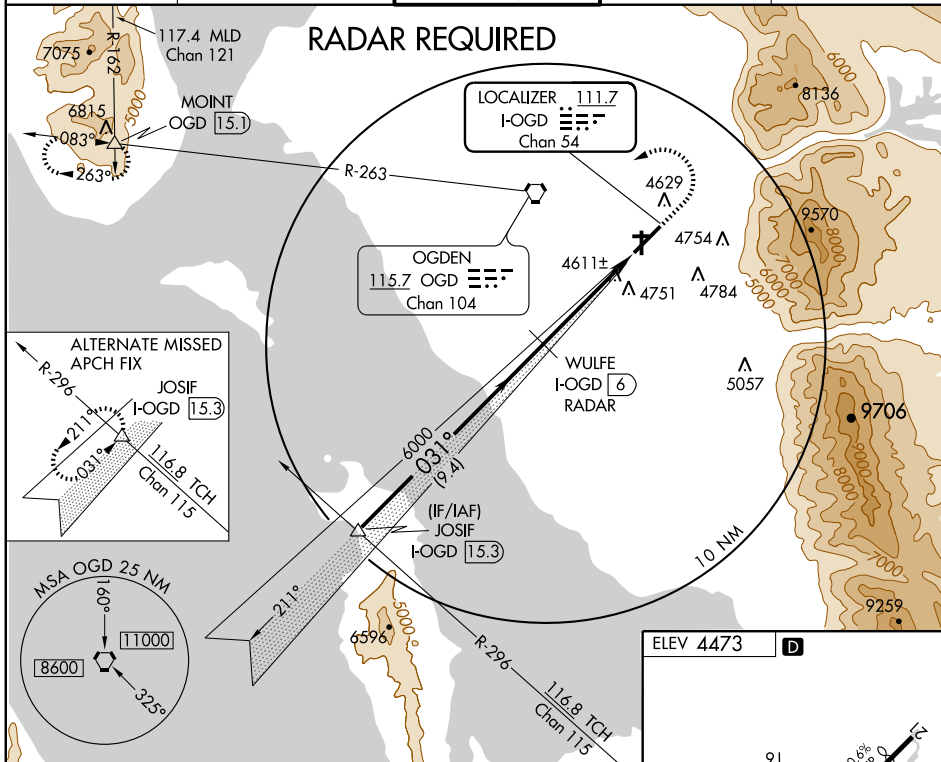

CATEGORY	A	B	C	D
S-ILS 3		4673-¾	200 (200-¾)	
S-LOC 3	4880-¾	407 (500-¾)	4880-1¼	407 (500-1¼)
CIRCLING	4980-1 507 (600-1)	5060-1 587 (600-1)	5060-1½ 587 (600-1½)	5100-2 627 (700-2)

Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

RNAV (GPS) Y RWY 3



OGDEN-HINCKLEY (OGD)

APP CRS	Rwy Idg	7252
031°	TDZE	4473
	Apt Elev	4473


▼ DME/DME RNP- 0.3 NA.
▲ When local alimeter setting not received, use Hill AFB alimeter setting.
When VGSI inoperative, circling Rwy 7 and 16 NA at night.
Inoperative table does not apply to LNAV Cat C.

MALS
MISSED APPROACH: Climbing left turn to 9000 direct MOINT and hold, continue climb-in-hold to 9000.

ATIS 125.55	SALT LAKE CITY APP CON 121.1 319.25	OGDEN TOWER★ 118.7 (CTAF) 253.5	GND CON 121.7	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

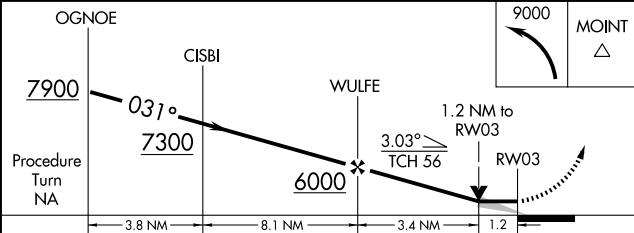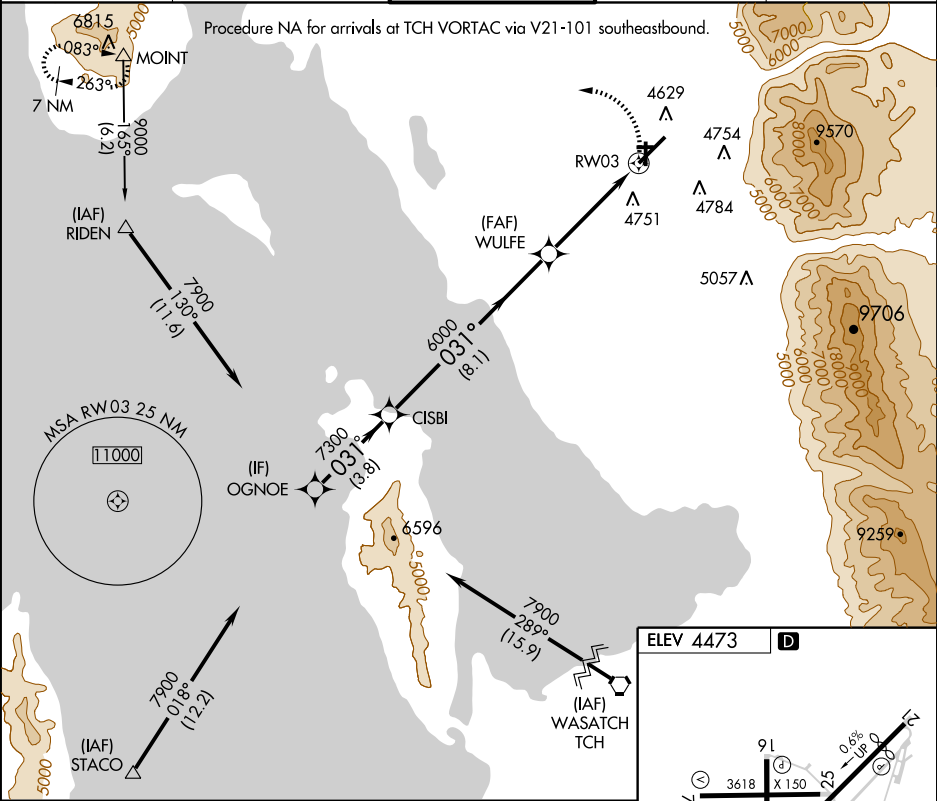

CATEGORY	A	B	C	D
LNAV MDA	4920-3/4 447 (500-3/4)	4920-1 1/4 447 (500-1 1/4)	4920-1 1/2 447 (500-1 1/2)	4920-1 1/2 447 (500-1 1/2)
CIRCLING	4980-1 507 (600-1)	5060-1 587 (600-1)	5060-1 1/2 587 (600-1 1/2)	5100-2 627 (700-2)

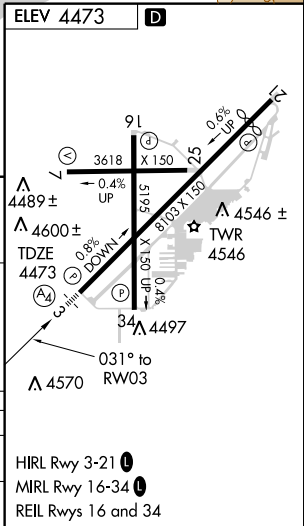

RNAV (GPS) Z RWY 3

OGDEN-HINCKLEY (OGD)


WAAS CH 65620 W03A	APP CRS 031°	Rwy Idg TDZE 7252 Apt Elev 4473
--	------------------------	---

⚠ DME/DME RNP-0.3 NA.
When local altimeter setting not received, use Hill AFB altimeter setting.
Inoperative table does not apply.


MALS
A2

MISSED APPROACH: Climb to 9000 direct JISUP and via 271° track to TOGTE and via 238° track to MOINT and hold, continue climb-in-hold to 9000.

ATIS 125.55	SALT LAKE CITY APP CON 121.1 319.25	OGDEN TOWER★ 118.7 (CTAF) 253.5	GND CON 121.7	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

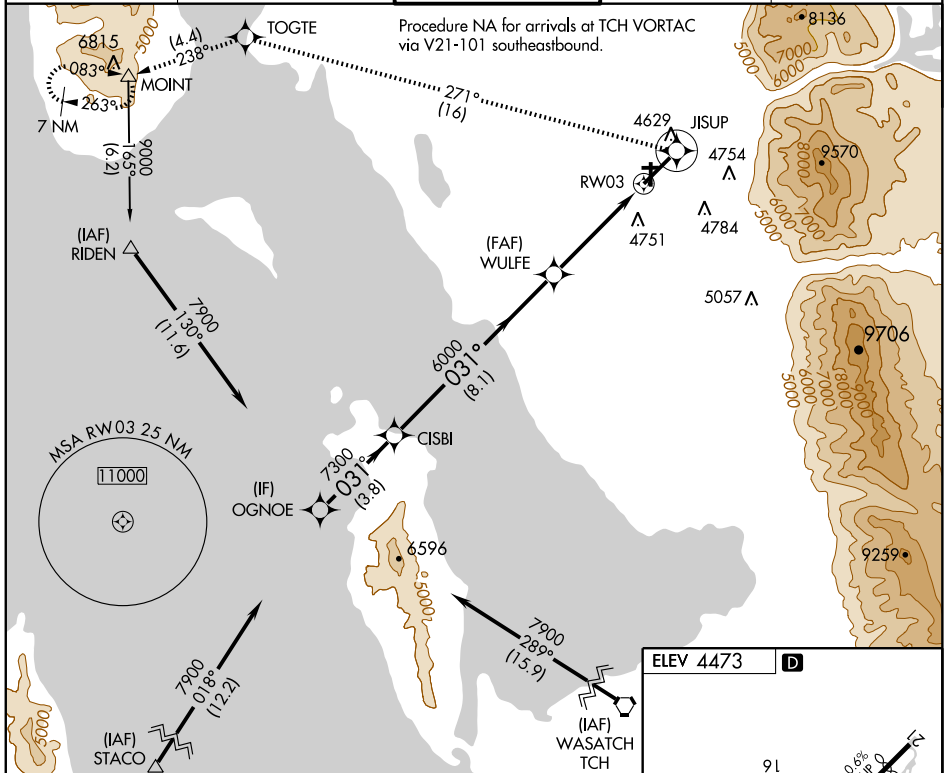

OGNOE		9000	JISUP	271° track	TOGTE	238° track	MOINT
Procedure Turn NA		7900	CISBI	WULFE	VGSI and RNAV glidepath not coincident.		
GS 3.00° TCH 49		7300	031°	6000	RW03		
		3.8 NM	8.1 NM	4.6 NM			
CATEGORY		A	B	C	D		
LPV DA		4890-1½		417 (500-1½)			
LNNAV/VNAV DA		NA					
LNNAV MDA		NA					
CIRCLING		NA					

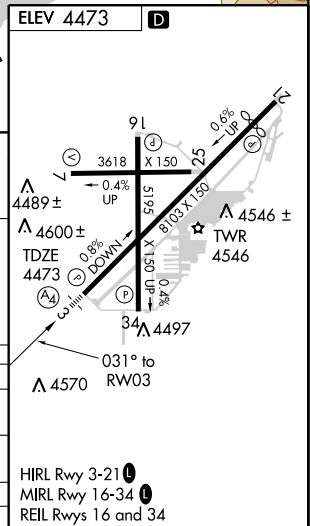

VORTAC OGD 115.7 Chan 104	APP CRS 101°	Rwy Idg 3618 TDZE 4448 Apt Elev 4473
---	------------------------	---



VOR/DME RWY 7

OGDEN-HINCKLEY (OGD)

▼ When local altimeter setting not received, use Hill AFB altimeter setting.
When VGSI inoperative, straight-in/circling Rwy 7 procedure NA at night.
When VGSI inoperative, circling Rwy 16 NA at night.
Visibility reduction by helicopters NA.

MISSED APPROACH: Climbing left turn to 9000 direct OGD VORTAC and via OGD VORTAC R-263 to MOINT/15.1 DME and hold, continue climb-in-hold to 9000.

ATIS 125.55	SALT LAKE CITY APP CON 121.1 319.25	OGDEN TOWER★ 118.7 (CTAF) 253.5	GND CON 121.7	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

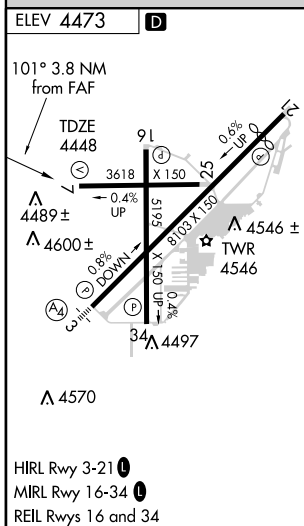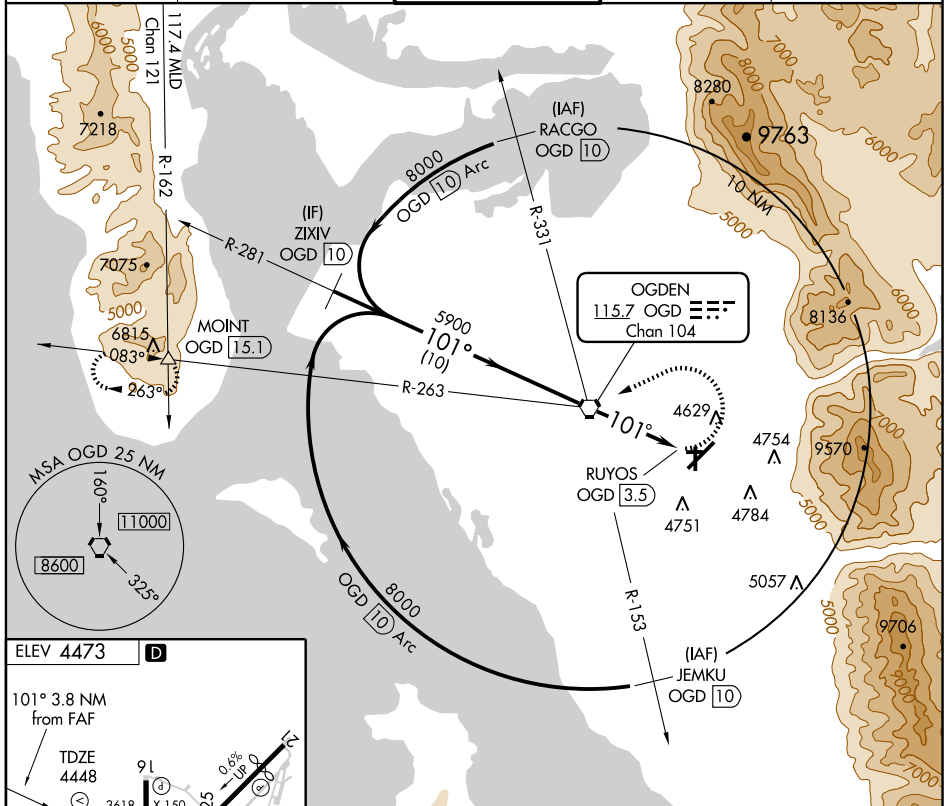

	ZIXIV OGD 10	9000	OGD 115.7	OGD R-263	MOINT
	8000	101°	5900	3.49° TCH 50	RUYOS OGD 3.5
Procedure Turn NA	10 NM	3.5 NM	0.3		
CATEGORY	A	B	C	D	
S-7	4900-1	452 (500-1)	4900-1¼ 452 (500-1¼)	4900-1½ 452 (500-1½)	
CIRCLING	4980-1 507 (600-1)	5060-1 587 (600-1)	5060-1½ 587 (600-1½)	5100-2 627 (700-2)	

▼

Inoperative table does not apply.

▲

NA

Circling NA at night to Rwy 18, 25, and 32.

MALSF

●

—


—

—

—

MISSED APPROACH: Climb to 6400, then climbing right turn to 10000 via heading 200° and PUC VOR/DME R-164 to FOSOV/PUC VOR/DME 12 DME and hold, continue climb-in-hold to 10000.

ASOS 135.425	SALT LAKE CENTER 133.9 370.85	UNICOM 122.8 (CTAF) 0
-----------------	----------------------------------	--------------------------

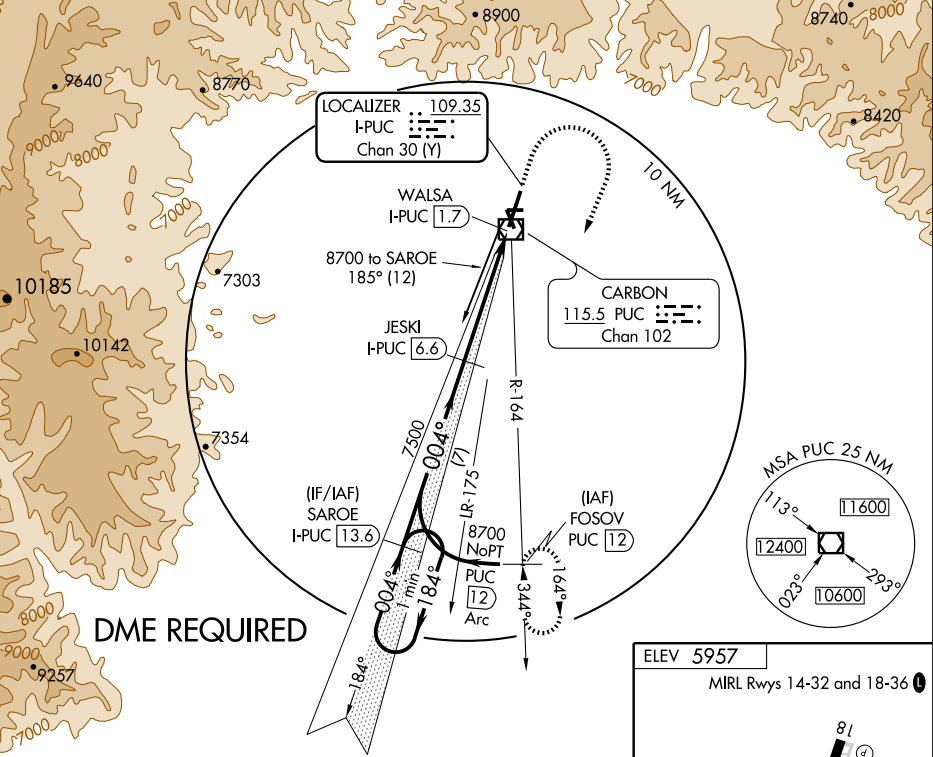

Use I-PUC DME when on the localizer course.
VGSI and ILS glidepath not coincident

One Minute Holding Pattern

8700 ← 184°

004° →

GS 3.00°

TCH 54

6400

10000

PUC R-164 115.5

FOSOV PUC 12

SAROE I-PUC 13.6

JESKI I-PUC 6.6

I-PUC 3

WALSA I-PUC 1.7

7500

7500

7500

7500


7 NM

3.6 NM

1.2 NM

0.2 NM

CATEGORY	A	B	C	D
S-ILS 36	6114-1 251 (200-1)			
S-LOC 36	6240-1 377 (300-1)			6240-1¼ 377 (300-1¼)
CIRCLING	6660-1 703 (800-1)	6740-1¼ 783 (800-1¼)	6820-2½ 863 (900-2½)	6980-3 1023 (1100-3)

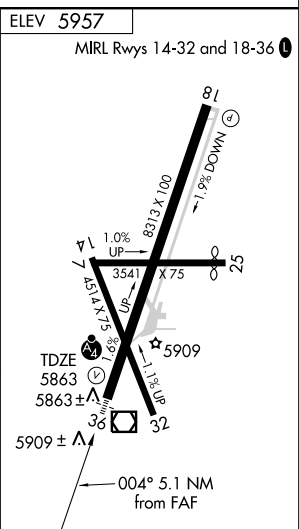


SW-4, 17 DEC 2009 to 14 JAN 2010

APP CRS	Rwy Idg
004°	8313
	TDZE
	5835
	Apt Elev
	5953

PRICE/ CARBON COUNTY RGNL/BUCK DAVIS FIELD AIRPORT (PUC)


Circling not authorized at night to Rwy 18, 25, and 32.	MALSF	MISSED APPROACH: Climbing right turn to 10000 direct FOSOV WP and hold.
NA	DME	

ASOS 135.425	SALT LAKE CENTER 133.9 370.85	UNICOM 122.8 (CTAF)
-----------------	----------------------------------	------------------------

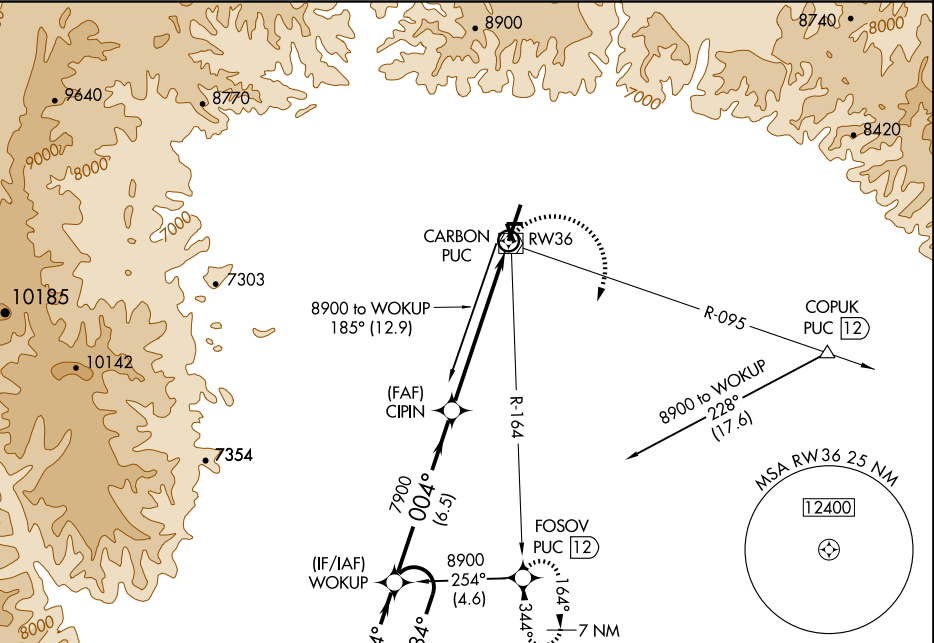

Procedure NA for arrival at COPUK via V134 eastbound.

6 NM Holding Pattern	WOKUP		CIPIN		FOSOV	
8900	184°	004°	004°	7900	2.1 NM to RW36	3.00° TCH 47
VGSI and descent angles not coincident.						
6.5 NM 4.3 NM 2.1 NM						
CATEGORY	A	B	C	D		
LNAV MDA	6400-1	565 (500-1)	6400-1½	6400-1¾		
			565 (500-1½)	565 (500-1¾)		
CIRCLING	6660-1	6740-1¼	6820-2½	6980-3		
	707 (800-1)	787 (800-1¼)	867 (900-2½)	1027 (1100-3)		

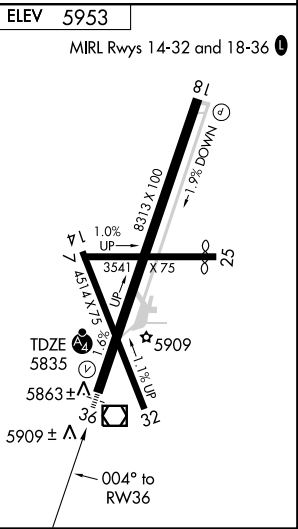

VOR/DME PUC
115.5
Chan 102

APP CRS
009°

Rwy Idg
TDZE
Apt Elev

8313
5835
5953

▼

▲

Circling NA at night to Rwy 18, 25, and 32.

MALSF

▼

▲

MISSED APPROACH: Climbing right turn to 10000 via heading 200° and PUC VOR/DME R-164 to FOSOV/12 DME and hold.

ASOS 135.425	SALT LAKE CENTER 133.9 370.85	UNICOM 122.8 (CTAF) 0
-----------------	----------------------------------	--------------------------

One Minute Holding Pattern

PUKNE PUC 12

HUNIK PUC 8.3

WELEN PUC 5.1

10000 PUC R-164 200°

PUC 1.4

FOSOV PUC 12

8900 ← 189°

009° →

009°

8000

7500

3.00° TCH 47

VOR/DME

3.8 NM

3.1 NM

3.7 NM

1.5

VGSI and descent angles not coincident

CATEGORY	A	B	C	D
S-36	6240-1	405 (300-1)	6240-1¼	405 (300-1¼)
CIRCLING	6660-1 707 (800-1)	6740-1¼ 787 (800-1¼)	6820-2½ 867 (900-2½)	6980-3 1027 (1100-3)

ELEV 5953

MIRL Rwy 14-32 and 18-36 0

81

8713 X 100

1.0% UP

3541

75

25

1.9% DOWN

1.1% UP

TDZE 5835

5863 ±

5909

36

32

5909 ±

009° to VOR/DME


SW-4, 17 DEC 2009 to 14 JAN 2010

Circling NA at night to Rwy 18, 25, and 32.

MALSF

MISSED APPROACH: Climb to 8200, then climbing left turn to 10400 direct PUC VOR/DME and hold.

ASOS 135.425	SALT LAKE CENTER 133.9 370.85	UNICOM 122.8 (CTAF)
------------------------	---	-------------------------------

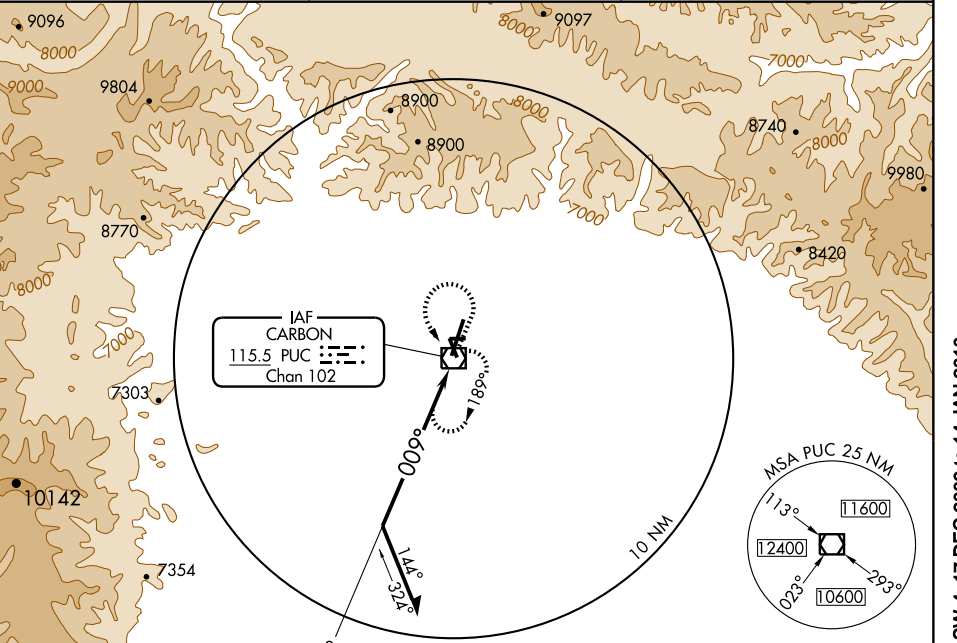

Remain within 10 NM

VOR/DME*

8200

↑

10400

↶

PUC

115.5

189°

↗

009°

↘

PUC

7.6

7.6 NM

* Maintain 9900 or above until established outbound for PT

CATEGORY	A	B	C	D
S-36	7880-1¼ 2045 (2000-1¼)	7880-1½ 2045 (2000-1½)	7880-3	2045 (2000-3)
CIRCLING	7880-1¼ 1927 (2000-1¼)	7880-1½ 1927 (2000-1½)	7880-3	1927 (2000-3)

ELEV 5953


MIRL Rwy 14-32 and 18-36

AIRPORT DIAGRAM

AL-683 (FAA)

PROVO MUNI (PVU)

PROVO, UTAH

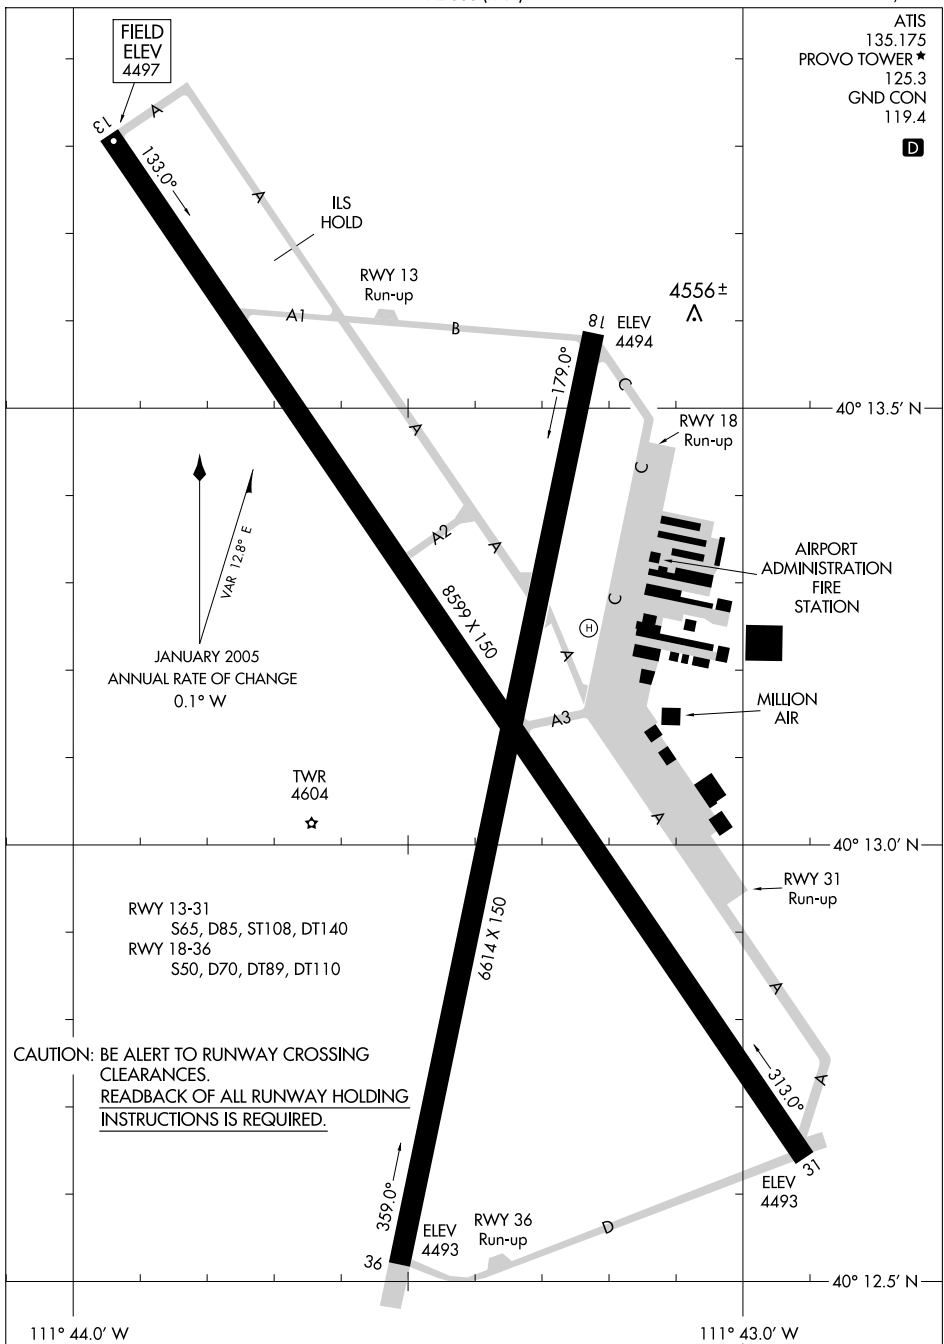

SW-4, 17 DEC 2009 to 14 JAN 2010

LOC/DME I-PVU 110.3 Chan 40	APP CRS 134°	Rwy Idg 8599 TDZE 4497 Apt Elev 4497
---	------------------------	---

ILS or LOC/DME RWY 13

PROVO MUNI (PVU)

T Circling NA East of Rwy 18 and 31.
A *Missed approach requires minimum climb of 315 feet per NM to 8600.

MISSED APPROACH: Climb to 9000 via heading 134° to intercept PVU VOR/DME R-130 to ZIPUT/PVU 5.9 DME then climbing right turn via heading 330° and FFU VORTAC R-110 to FFU VORTAC and hold.

ATIS 135.175	SALT LAKE CITY APP CON 124.3 322.3	PROVO TOWER ★ 125.3 (CTAF)	GND CON 119.4
------------------------	--	--------------------------------------	-------------------------

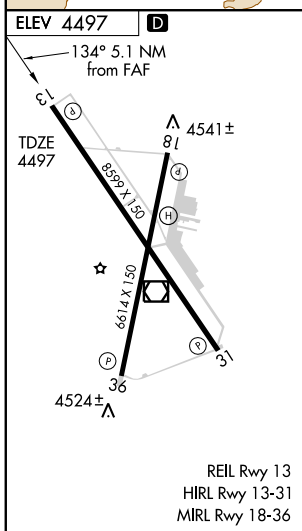
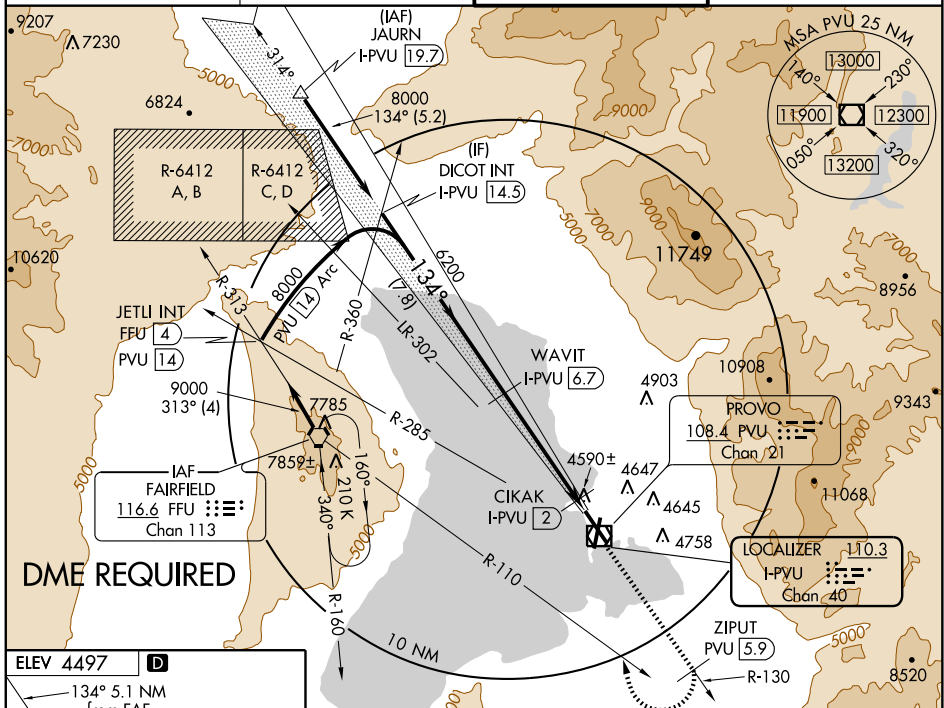


Diagram illustrating a DME arc crossing a procedure turn. The diagram shows a flight path starting at 8000 feet, descending to 6200 feet at a 134° angle. A procedure turn is indicated by a curved arrow. The DME arc is labeled WAVIT I-PVU 6.7. The distance from the start of the descent to the DME arc is 7.8 NM. The distance from the DME arc to the final point is 4.6 NM. The final point is labeled CIKAK I-PVU 2. The diagram also shows a DME INT I-PVU 14.5 and a PDU R-130 108.4. A 330° heading is indicated. The diagram is labeled Use I-PVU DME when on the LOC course.


PROVO FOUR DEPARTURE (OBSTACLE)

ATIS 135.175
GND CON 119.4
PROVO TOWER *
125.3 (CTAF)
SALT LAKE CITY DEP CON
118.85

TAKE-OFF MINIMUMS


- Rwy 13: Standard with a minimum climb of 400' per NM to 9000, or 3100-3 for climb in visual conditions.
Rwy 18: Standard with a minimum climb of 350' per NM to 9000, or 3100-3 for climb in visual conditions.
Rwy 31: Standard with a minimum climb of 380' per NM to 9000, or 3100-3 for climb in visual conditions.
Rwy 36: Standard with a minimum climb of 365' per NM to 9000, or 3100-3 for climb in visual conditions.

NOTE: Climb in visual conditions NA at night.



TAKE-OFF OBSTACLE NOTES

- Rwy 18: Multiple trees beginning 429' from DER, 288' left of centerline, up to 57' AGL/4533' MSL.
Multiple trees beginning 852' from DER, 202' right of centerline, up to 57' AGL/4533' MSL.
Road 775' from DER, on centerline, 15' AGL/4518' MSL.
Rwy 31: Multiple trees beginning 1954' from DER, 743' right of centerline, up to 72' AGL/4561' MSL.
Rwy 36: Multiple trees beginning 978' from DER, 18' right of centerline, up to 46' AGL/4541' MSL.
Road 210' from DER, on centerline, 15' AGL/4516' MSL.

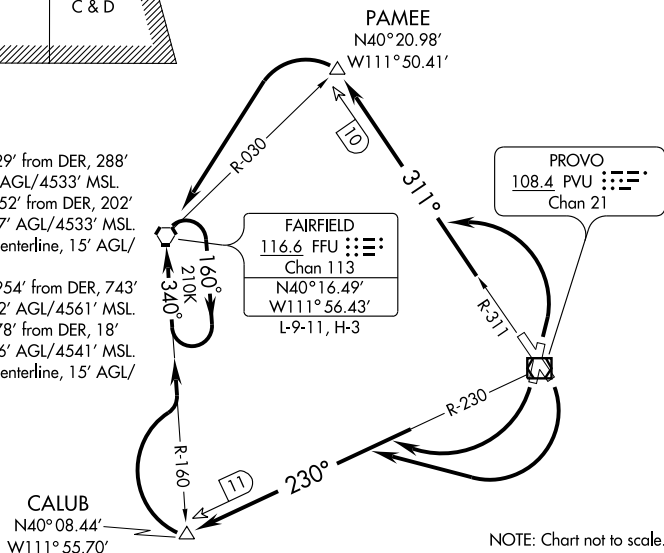

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAYS 13, 18: Climbing right turn to 9000 via PVU VOR/DME R-230 to CALUB INT/PVU 11 DME and a right turn via FFU VORTAC R-160 to FFU VORTAC and hold. Thence.... or climb in visual conditions to cross Provo Muni Airport southwest bound at or above 7400, climb to 9000 via PVU R-230 to CALUB INT/PVU 11 DME and right turn via FFU R-160 to FFU VORTAC and hold. Thence...

TAKE-OFF RUNWAY 31: Climb to 9000 via PVU VOR/DME R-311 to PAMEE INT/PVU 10 DME and left turn direct FFU VORTAC and hold. Thence.... or climb in visual conditions to cross Provo Muni Airport northwest bound at or above 7400, climb to 9000 via PVU R-311 to PAMEE INT/PVU 10 DME and left turn direct FFU VORTAC and hold. Thence...

TAKE-OFF RUNWAY 36: Climbing left turn to 9000 via PVU VOR/DME R-311 to PAMEE INT/PVU 10 DME and left turn direct FFU VORTAC and hold. Thence.... or climb in visual conditions to cross Provo Muni Airport northwest bound at or above 7400, climb to 9000 via PVU R-311 to PAMEE INT/PVU 10 DME, and left turn direct FFU VORTAC and hold. Thence...

....Expect clearance for filed route and altitude within 10 minutes after departure.

WAAS CH 97307 W13A	APP CRS 134°	Rwy Idg TDZE Apt Elev 8599 4497
--	------------------------	--


RNAV (GPS) RWY 13

PROVO MUNI (PVU)

⚠ Circling NA East of Rwys 18 and 31.
For uncompensated Baro-VNAV systems, LNAV/VNAV
NA below -23°C (-9°F) or above 40°C (104°F).
DME/DME RNP: 0.3 NA.

MISSED APPROACH: Climb to 10300 direct HUNSU and
via track 206° to SANN0 and via track 285° to MEDKE
and hold, continue climb-in-hold to 10300.

ATIS 135.175	SALT LAKE CITY APP CON 124.3 322.3	PROVO TOWER ★ 125.3 (CTAF)	GND CON 119.4
------------------------	--	--------------------------------------	-------------------------

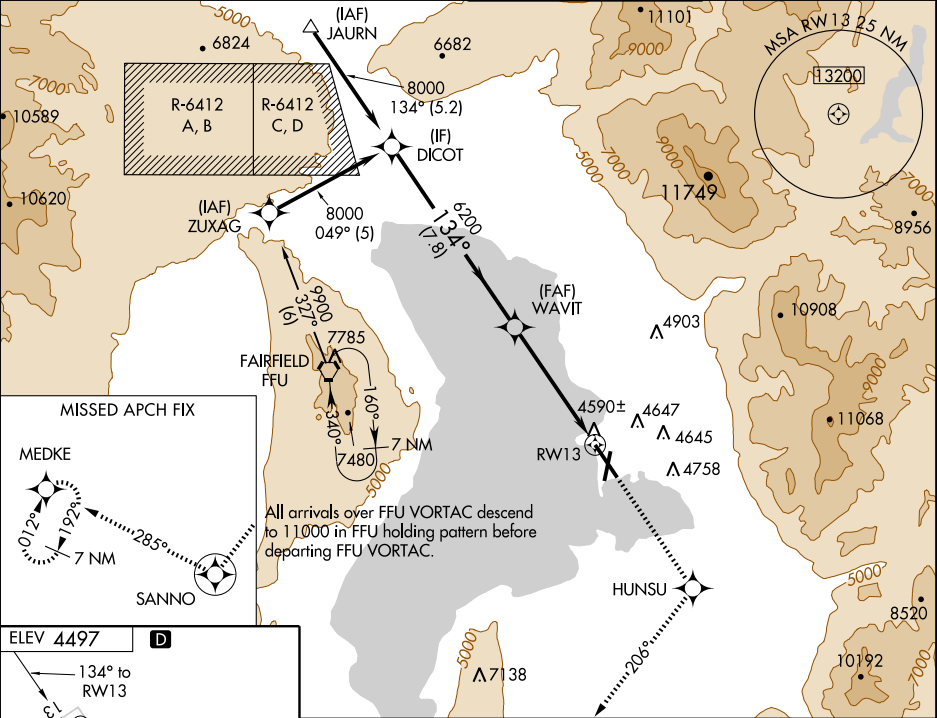

ELEV **4497**

D

REIL Rwy 13
HIRL Rwy 13-31
MIRL Rwy 18-36




Procedure Turn NA	DICOT	10300 ↑		HUNSU ✧	trk 206°	SANNO ✧	trk 285°	MEDKE ✧
	8000	WAVIT		* LNAV only				
	134°	✖		* 1.6 NM to RW13				
	6200			RW13				
	GS 3.00° TCH 50°	7.8 NM		3.5 NM		1.6 NM		
	CATEGORY	A		B		C		D
	LPV DA	4770-1 273 (300-1)						
	LNAV/ VNAV DA	4940-1½ 443 (500-1½)						
	LNAV MDA	5040-1	543 (600-1)	5040-1½ 543 (600-1½)		5040-1¾ 543 (600-1¾)		
	CIRCLING	5040-1	543 (600-1)	5040-1½ 543 (600-1½)		5060-2 563 (600-2)		

▼

Circling NA East of Rwys 18 and 31.


MISSED APPROACH: Climb to 9000 direct PVU VOR/DME and PVU R-130 to ZIPUT/5.9 DME then climbing right turn via heading 330° and FFU VORTAC R-110 to FFU VORTAC and hold.

ATIS 135,175	SALT LAKE CITY APP CON 124.3 322.3	PROVO TOWER★ 125.3 (CTAF)	GND CON 119.4
-----------------	---------------------------------------	------------------------------	------------------

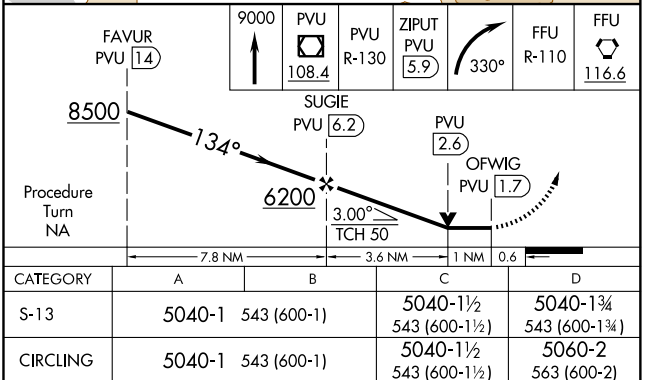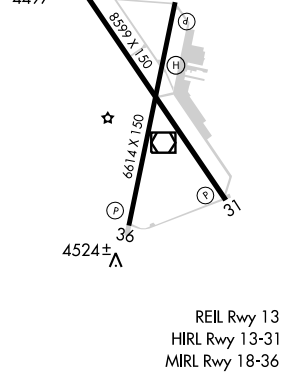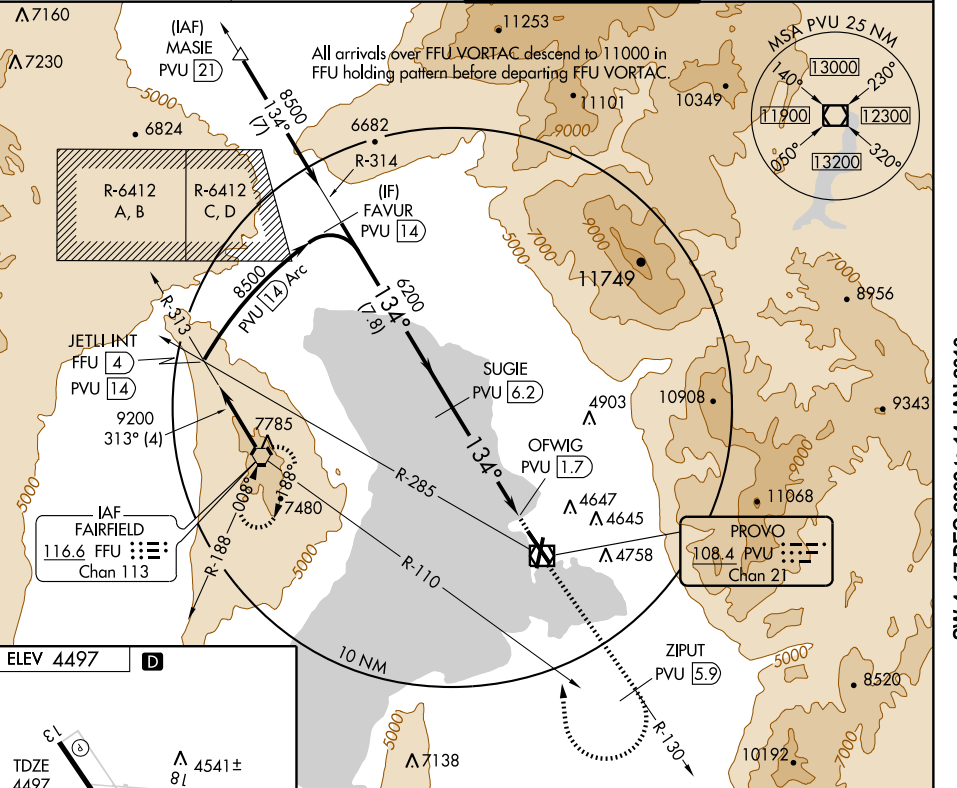

HAMET TWO DEPARTURE (RNAV) (OBSTACLE)

SALT LAKE CITY CENTER
133.6 269.25
UNICOM 122.8 (CTAF)
AWOS-3 133.375

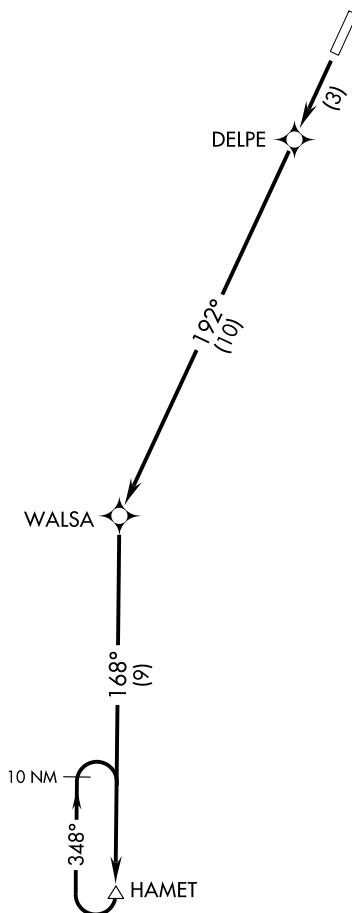

NOTE: GPS Required.

NOTE: RNAV 1

TAKE-OFF MINIMUMS

Rwy 1: NA-ATC.

Rwy 19: Standard with a minimum climb of 382' per NM to 14700.

TAKE-OFF OBSTACLE NOTE

Rwy 19: Road 0' from DER, 400' right of centerline, 15' AGL/5334' MSL.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 19: Climb direct DELPE, then via 192° track/10 to WALSA, then via 168° track/9 to HAMET. Continue climb-in-hold at HAMET to 16000 before proceeding on course.

RICHFIELD ONE DEPARTURE (RNAV) (OBSTACLE)


RICHFIELD, UTAH

SALT LAKE CITY CENTER

133.6 269.25

UNICOM 122.8 (CTAF)

AWOS-3 133.375

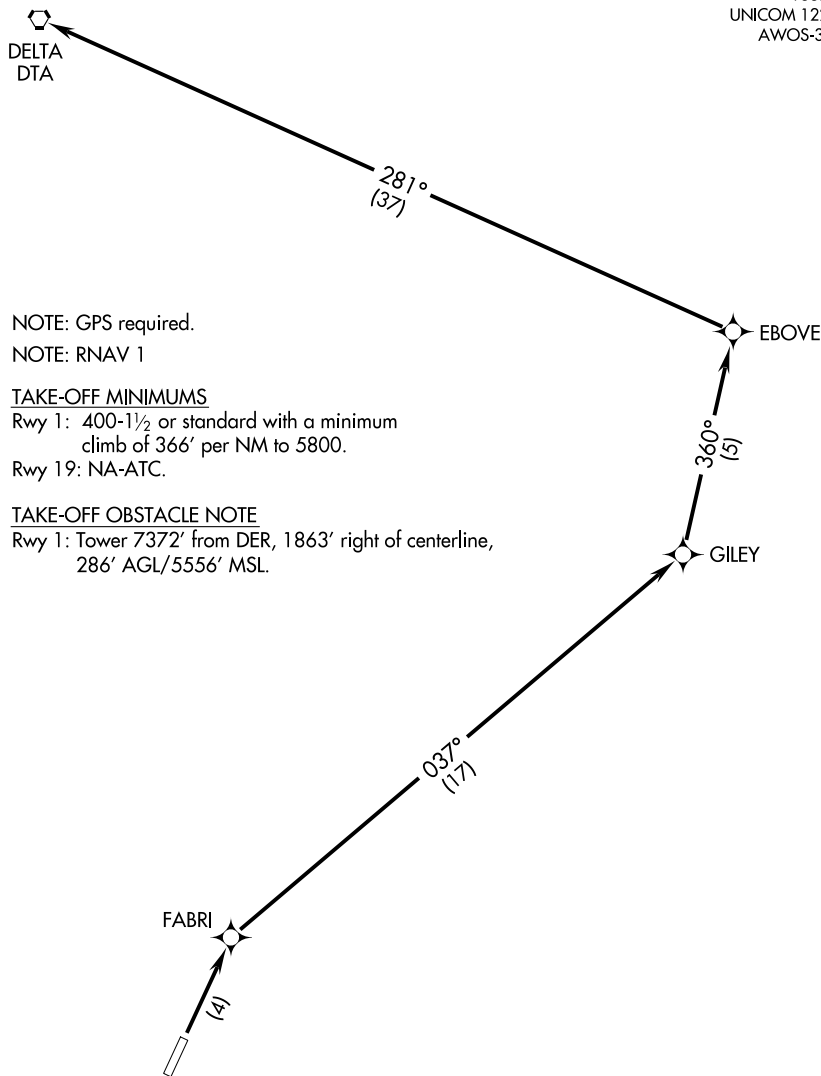

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 1: Climb direct FABRI, then via 037° track/17 to GILEY, then via 360° track/5 to EBOVE, then via 281° track/37 to DELTA VORTAC, maintain 10700.



APP CRS	Rwy Idg	6600
207°	TDZE	5275
	Apt Elev	5301

RNAV (GPS) RWY 19


RICHFIELD MUNI (R1F)

GPS or RNP-0.3 required. DME/DME RNP-0.3 NA.	MISSED APPROACH: Climbing left turn to 12900 direct EBOVE WP and hold.
NA	

AWOS-3 133.375	SALT LAKE CITY CENTER 133.6 269.25	UNICOM 122.8 (CTAF)
-------------------	---------------------------------------	------------------------

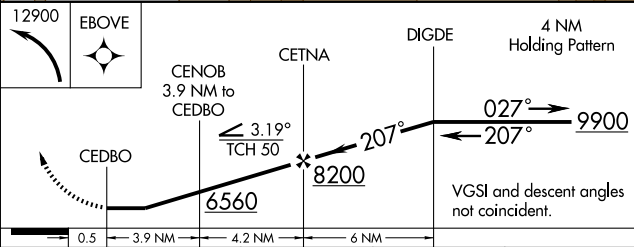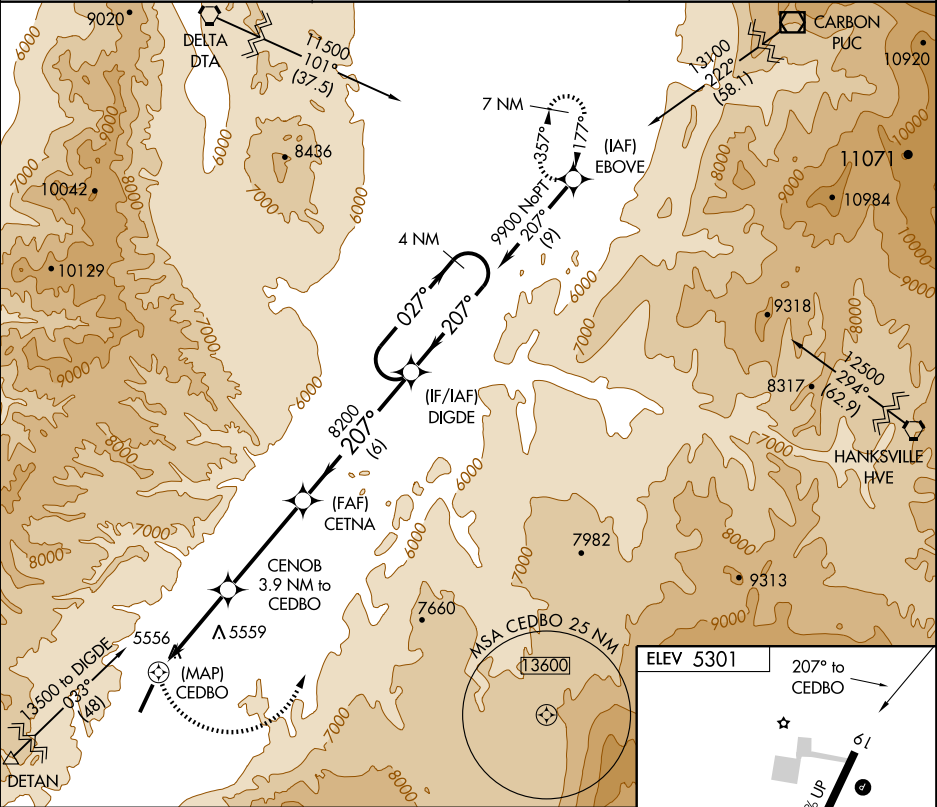

CATEGORY	A	B	C	D
RNAV MDA	6440-1¼ 1165 (1200-1¼)	6440-1½ 1165 (1200-1½)	6440-3 1165 (1200-3)	NA
CIRCLING	6780-1¼ 1479 (1500-1¼)	7120-1½ 1819 (1900-1½)	7280-3 1979 (2000-3)	NA

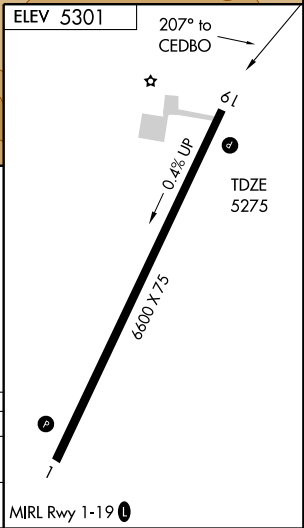



APP CRS 248°	Rwy Idg TDZE 6500 5140 Apt Elev 5172
------------------------	--

RNAV (GPS) RWY 25
ROOSEVELT MUNI (74V)

Use Vernal alimeter setting. When not received, procedure not authorized.
GPS or RNP- 0.3 required. DME/DME RNP- 0.3 NA.

MISSED APPROACH: Climbing left turn to 9000 direct MTU VORTAC and hold.

AWOS-3 118.975	CEDAR CITY RADIO 122.1R	UNICOM 122.8 (CTAF)
--------------------------	-----------------------------------	-------------------------------

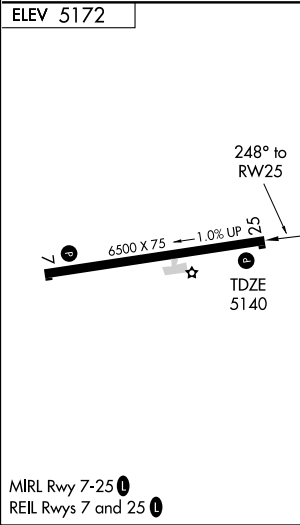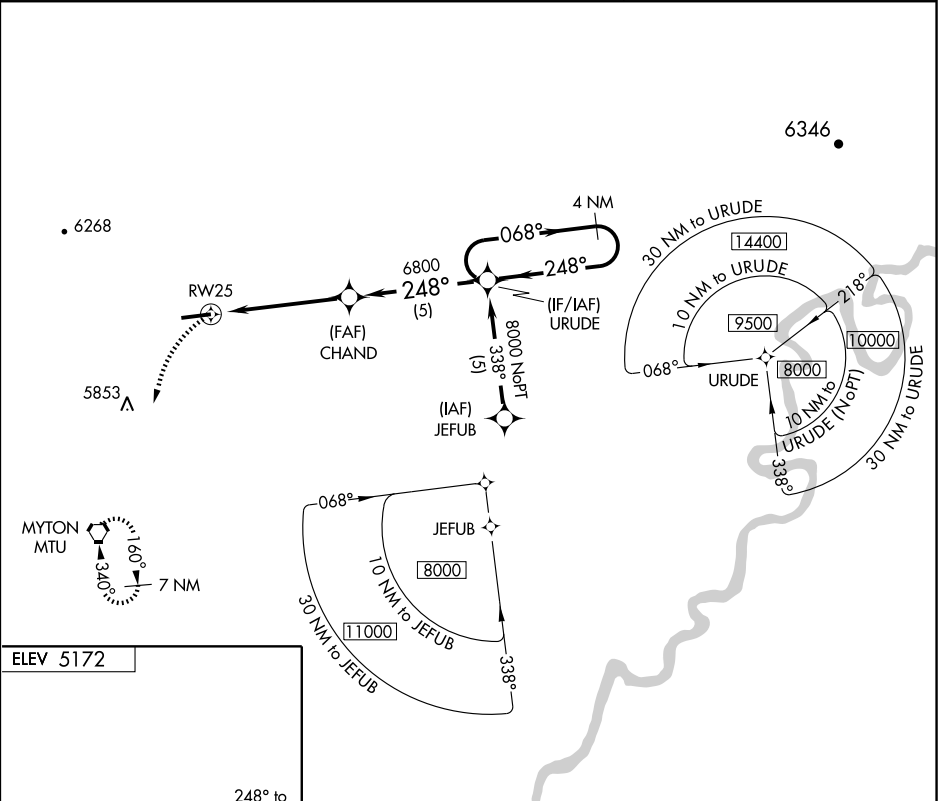

9000	MTU	VGSI and descent angles not coincident.	URUDE	4 NM Holding Pattern
CHAND	RW25	6800	248°	068°
3.11° TCH 45	5 NM	5 NM	8000	
CATEGORY	A	B	C	D
LNAV MDA	5880-1	740 (800-1)	5880-2 740 (800-2)	NA
CIRCLING	6140-1¼ 968 (1000-1¼)	6140-1½ 968 (1000-1½)	6260-3 1088 (1100-3)	NA



VOR or GPS-A
ROOSEVELT MUNI (74V)

VORTAC MTU 112.7 Chan 74	APP CRS 010°	Rwy Idg TDZE Apt Elev	N/A N/A 5172
--------------------------------	-----------------	-----------------------------	--------------------


Use Vernal altimeter setting: When not received, procedure not authorized.

MISSED APPROACH: Climbing right turn to 9000 direct MTU VORTAC and hold.

AWOS-3 118.975	CEDAR CITY RADIO 122.1R	UNICOM 122.8 (CTAF)
-------------------	----------------------------	------------------------

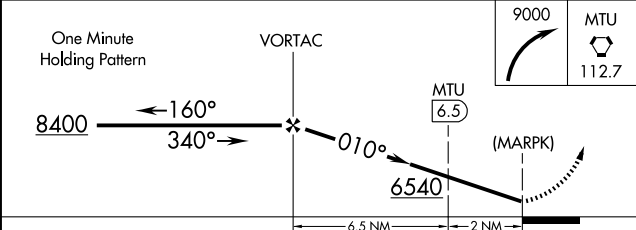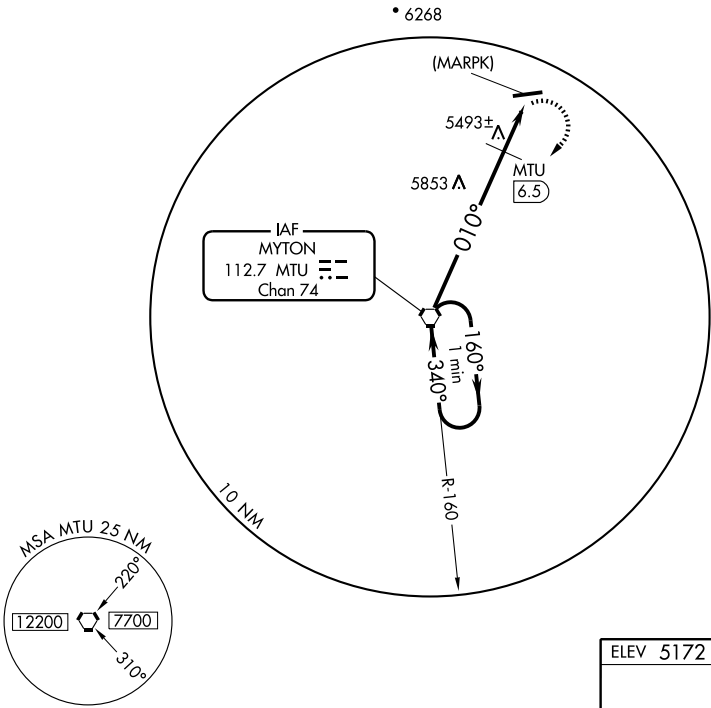

CATEGORY	A	B	C	D
CIRCLING	6540-1¼ 1368 (1400-1¼)	6540-1½ 1368 (1400-1½)	6540-3 1368 (1400-3)	NA
DME MINIMUMS				
CIRCLING	6140-1¼ 968 (1000-1¼)	6140-1½ 968 (1000-1½)	6260-3 1088 (1100-3)	NA

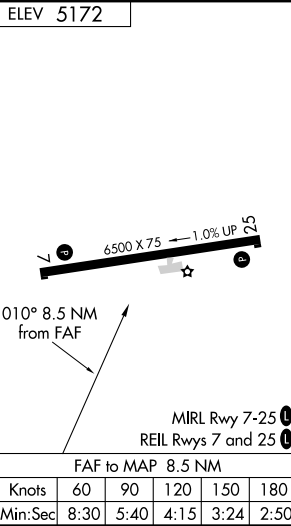




SALT LAKE CITY APP CON

124.9 290.3

ATIS

124.75 125.625

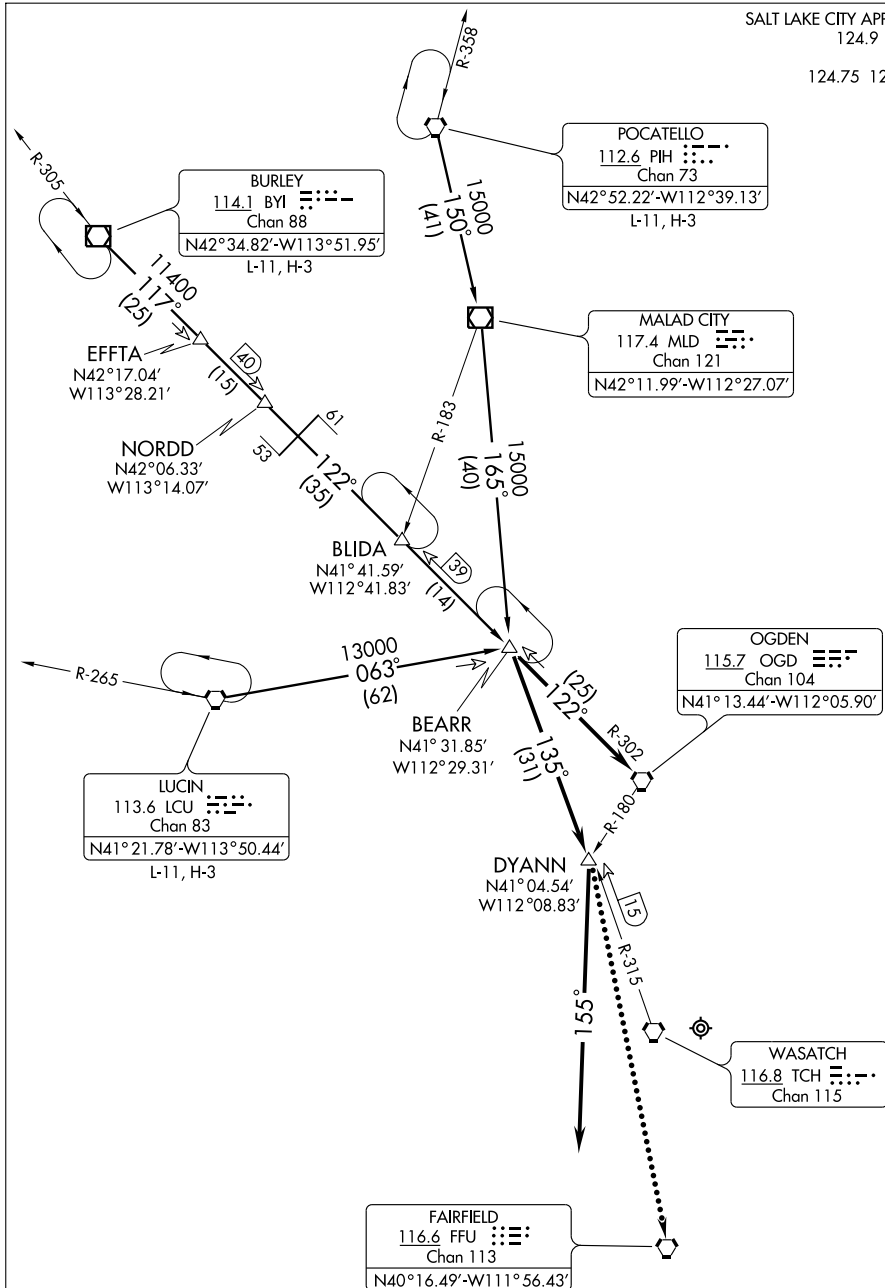

ARRIVAL DESCRIPTION

BURLEY TRANSITION (BYI.BEARR4): From over BYI VOR/DME via BYI R-117 and OGD R-302 to BEARR INT. Thence....

LUCIN TRANSITION (LCU.BEARR4): From over LCU VORTAC via LCU R-063 to BEARR INT. Thence....

POCATELLO TRANSITION (PIH.BEARR4): From over PIH VORTAC via PIH R-150 to MLD VOR/DME, then via MLD R-165 to BEARR INT. Thence....

.... LANDING NORTH: Via TCH R-315 to DYANN INT. After DYANN INT fly heading 155° for vectors ILS/DME or VISUAL RWY 34L approach.


.... LANDING SOUTH: Via OGD R-302 to OGD VORTAC. Expect ILS/DME RWY 16L approach.

LOST COMMUNICATIONS: LANDING NORTH: In the event of lost communications, at DYANN INT proceed direct FFU VORTAC. Maintain 13,000' until FFU VORTAC.

SALT LAKE CITY APP CON

124.3 322.3

ATIS 124.75 125.625

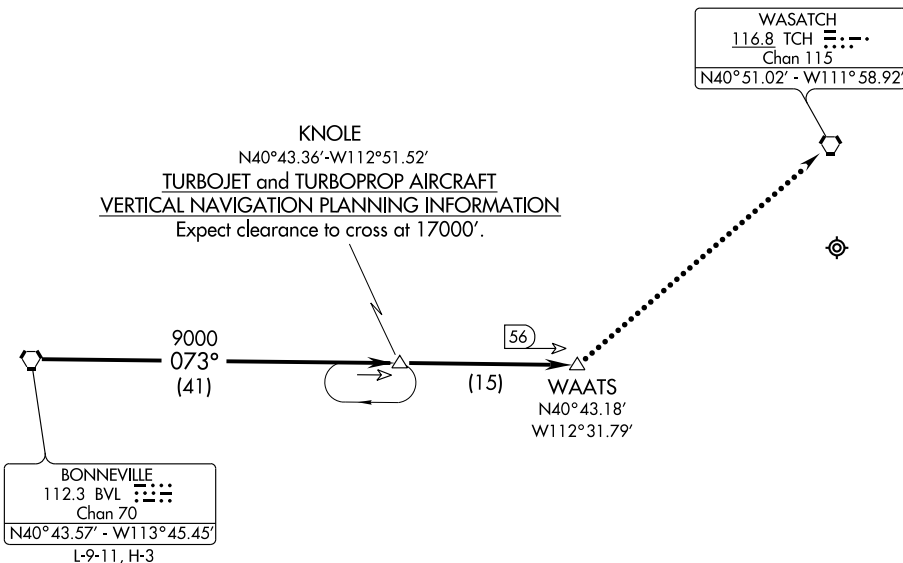


From over BVL VORTAC via BVL R-073 to WAATS DME Fix, thence expect radar vectors to final approach course.

LOST COMMUNICATIONS: In the event of lost communications at WAATS, proceed direct TCH VORTAC. Maintain 13000' until TCH VORTAC.

BRIGHAM CITY THREE ARRIVAL

ST-365 (FAA)

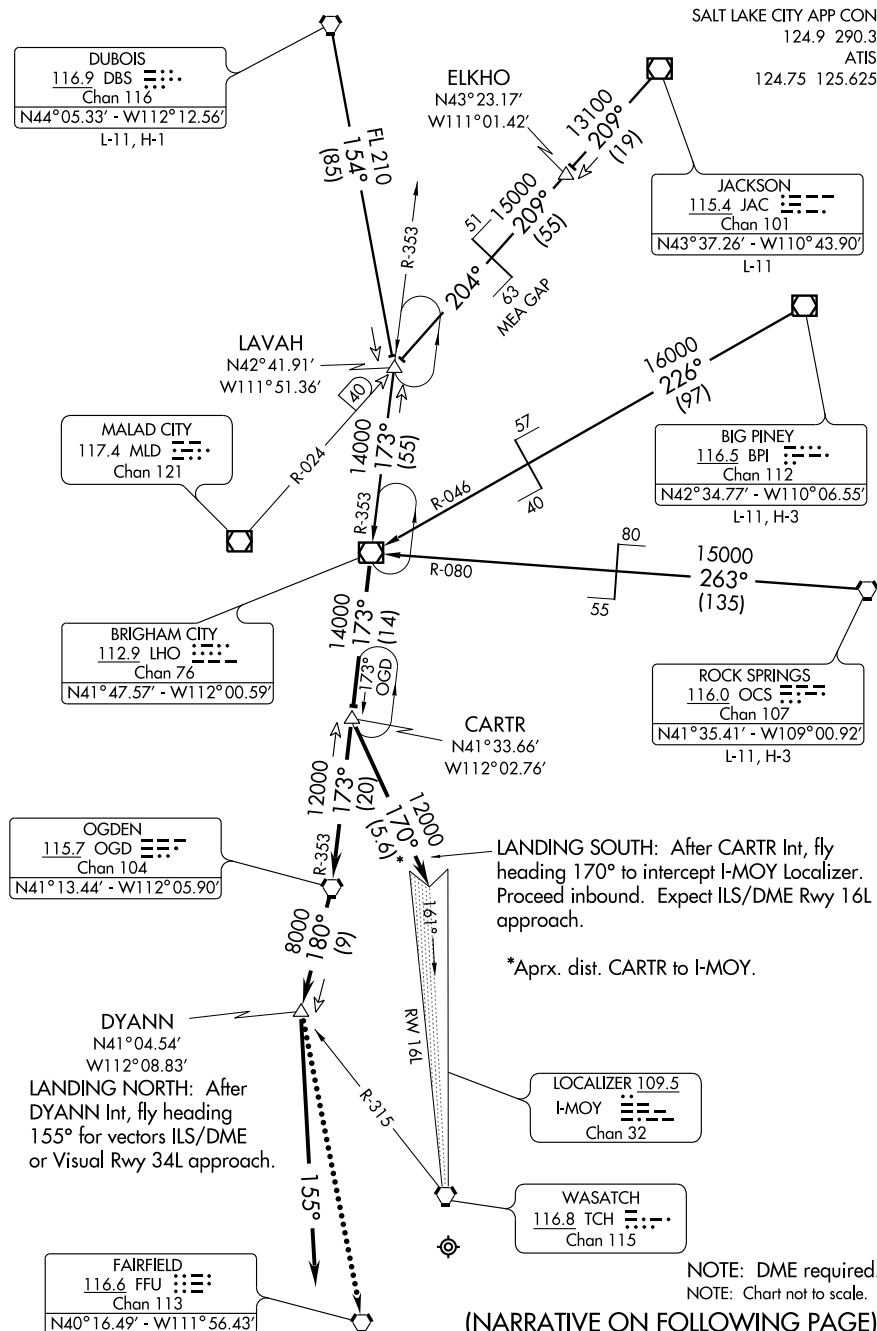SALT LAKE CITY INTL
SALT LAKE CITY, UTAH

(NARRATIVE ON FOLLOWING PAGE)

ARRIVAL ROUTE DESCRIPTION

BIG PINEY TRANSITION (BPI.LHO3): From over BPI VOR/DME via BPI R-226 and LHO R-046 to LHO VOR/DME. Thence....

DUBOIS TRANSITION (DBS.LHO3): From over DBS VORTAC via DBS R-154 to LAVAH INT, then via LHO R-353 to LHO VOR/DME. Thence....

JACKSON TRANSITION (JAC.LHO3): From over JAC VOR/DME via JAC R-209 and MLD R-024 to LAVAH INT, then via LHO R-353 to LHO VOR/DME. Thence....

ROCK SPRINGS TRANSITION (OCS.LHO3): From over OCS VORTAC via OCS R-263 and LHO R-080 to LHO VOR/DME. Thence....

LANDING NORTH:

.... From over LHO VOR/DME via LHO R-173 to CARTR INT, then via OGD R-353 to OGD VORTAC, then via OGD R-180 to DYANN INT. After DYANN INT, fly heading 155° for vectors ILS/DME or VISUAL RWY 34L approach.


LANDING SOUTH:

.... From over LHO VOR/DME via LHO R-173 to CARTR INT. After CARTR INT, fly heading 170° to intercept I-MOY Localizer, proceed inbound. Expect ILS/DME RWY 16L approach.

LOST COMMUNICATIONS:

LANDING NORTH: In the event of lost communications, at DYANN INT proceed direct FFU VORTAC. Maintain 13,000' until FFU VORTAC.

SALT LAKE CITY APP CON
128.1 307.05
ATIS 124.75 125.625

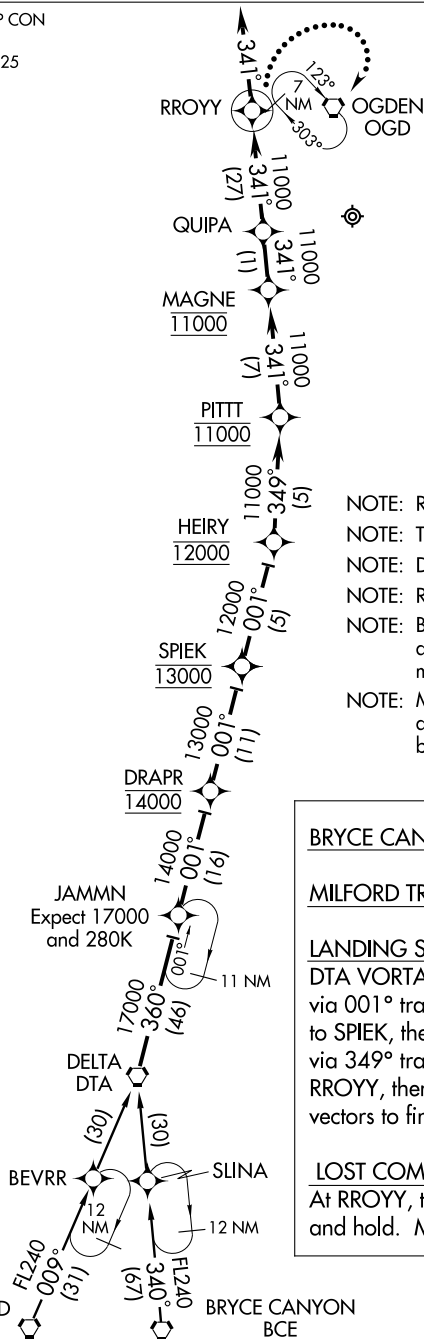

NOTE: RADAR required.

NOTE: Turbojet aircraft only.

NOTE: DME/DME/IRU or GPS required.

NOTE: RNAV 1.

NOTE: BCE TRANSITION: For Non-GPS equipped aircraft, BVL, FFU, TCH, and OGD DMEs must be operational.

NOTE: MLF TRANSITION: For Non-GPS equipped aircraft, BVL, TCH, and OGD DMEs must be operational.

BRYCE CANYON TRANSITION (BCE.DELTA3)

MILFORD TRANSITION (MLF.DELTA3)

LANDING SOUTH (RWY 16L/16R/17): From DTA VORTAC via 360° track to JAMMN, then via 001° track to DRAPR, then via 001° track to SPIEK, then via 001° track to HEIRY, then via 349° track to PITTT, then as depicted to RROYY, then via 341° heading. Expect radar vectors to final approach course.


LOST COMMUNICATIONS:

At RROYY, turn right direct OGD VORTAC and hold. Maintain 11000.

NOTE: Chart not to scale.

EDETH ONE DEPARTURE (RNAV)

ATIS 124.75 125.625
CLNC DEL
127.3 379.975
GND CON
121.9 348.6 (Rwys 14-32, 17-35)
133.65 348.6 (Rwys 16L-34R, 16R-34L)
SALT LAKE CITY TOWER
119.05 257.8 (Rwy 16L-34R)
118.3 257.8 (Rwys 14-32, 17-35)
132.65 336.4 (Rwy 16R-34L)
SALT LAKE CITY DEP CON
128.1 307.05

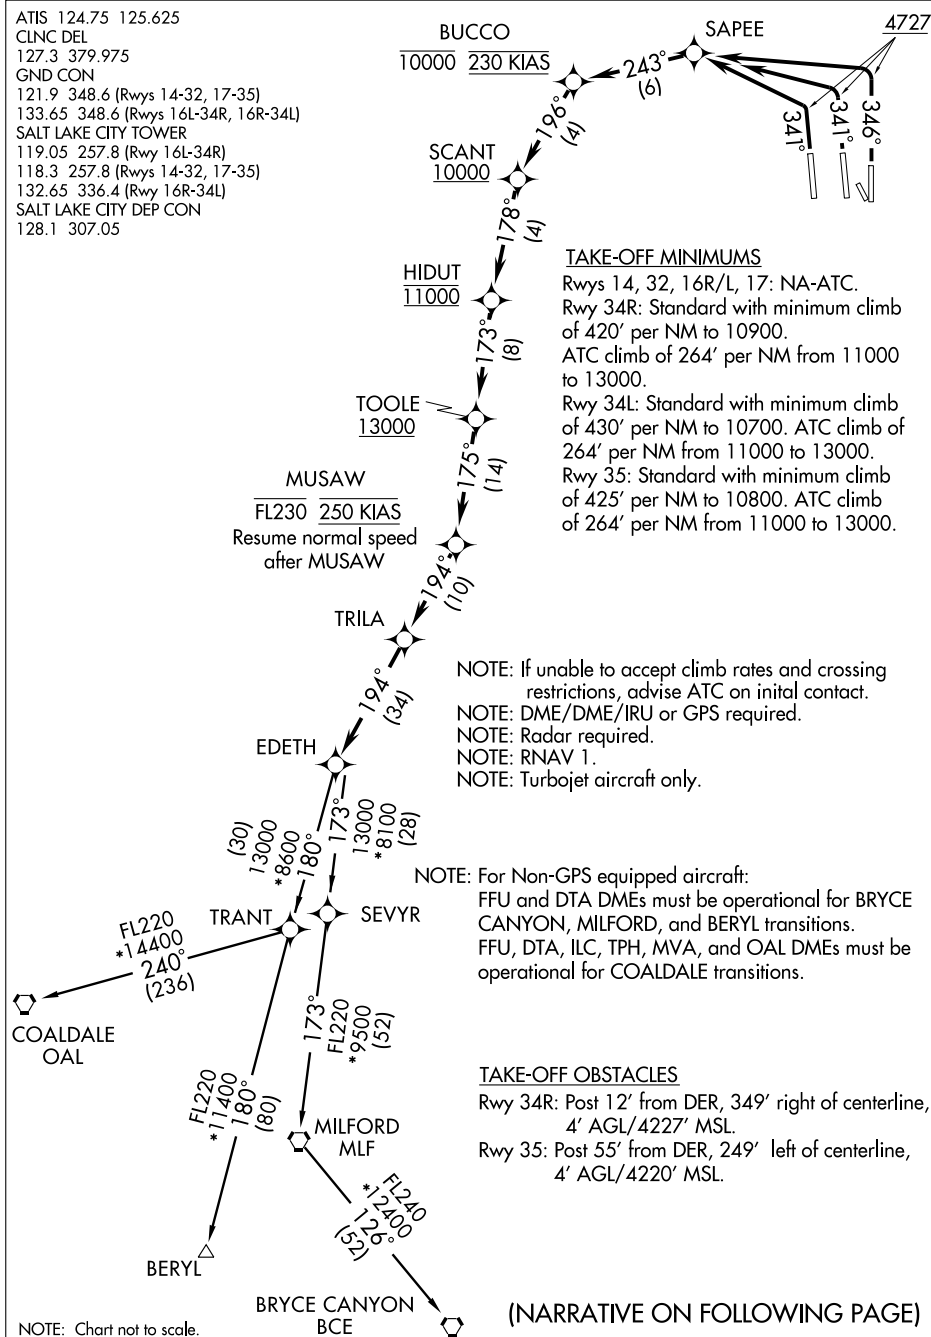

EDETH ONE DEPARTURE (RNAV)



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 34R: Climb heading 341° to 4727, then left turn direct SAPEE, then via depicted route to EDETH, thence. . . .

TAKE-OFF RUNWAY 34L: Climb heading 341° to 4727, then left turn direct SAPEE, then via depicted route to EDETH, thence. . . .

TAKE-OFF RUNWAY 35: Climb heading 346° to 4727, then left turn direct SAPEE, then via depicted route to EDETH, thence. . . .

. . . .via (transition) maintain FL230 or lower filed altitude. Expect filed altitude 10 minutes after departure.

BERYL TRANSITION (EDETH1.BERYL)

BRYCE CANYON TRANSITION (EDETH1.BCE)

COALDALE TRANSITION (EDETH1.OAL)

MILFORD TRANSITION (EDETH1.MLF)


FAIRFIELD SIX DEPARTURE (OBSTACLE)

ATIS 124.75 125.625
CLNC DEL
127.3 379.975
SALT LAKE CITY DEP CON
124.3 322.3

NOTE: This is a radar vector departure
to assigned route or fix.

NOTE: Radar required.

NOTE: Chart not to scale.

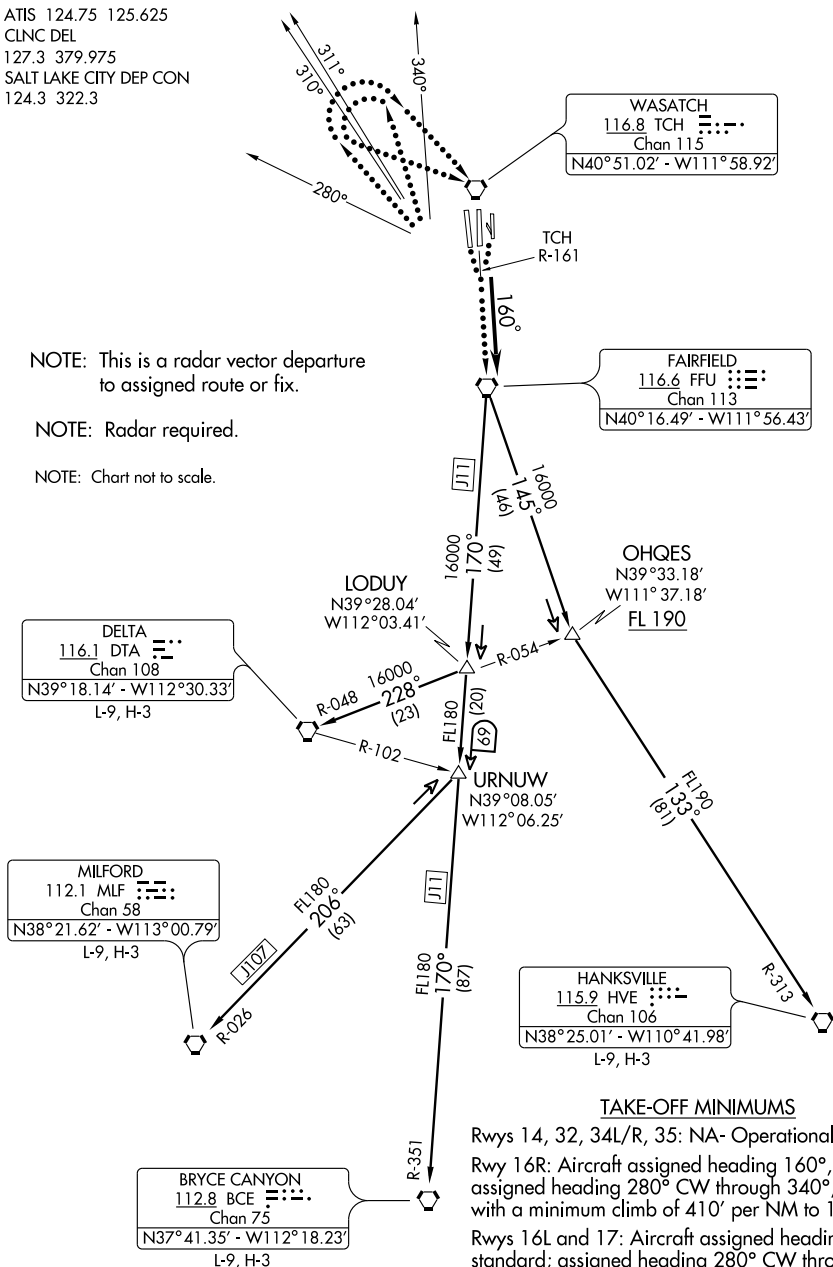

(NARRATIVE ON FOLLOWING PAGE)

FAIRFIELD SIX DEPARTURE



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAYS 16L/R and 17: Fly heading 160° or as assigned, maintain 10,000' or assigned lower altitude. Expect radar vectors to FFU VORTAC then via filed/assigned transition. Expect clearance to filed altitude 10 minutes after departure.

LOST COMMUNICATIONS: If not in contact with Departure Control 1 minute after take-off:

Aircraft assigned heading 160°:

Runways 16L and 17 turn right, thence. . . .

Runway 16R turn left, thence. . . .

. . . . climb to 11,000' via TCH R-161 to FFU VORTAC and continue climb via assigned/ filed transition.

All others, fly assigned heading to 11,000'. Then:

Aircraft heading 280° CW through 310°: a climbing right turn, thence. . . .

Aircraft heading 311° CW through 340°: a climbing left turn, thence. . . .

. . . . direct TCH VORTAC, TCH R-161 to FFU VORTAC, and continue climb via assigned/ filed transition.

BRYCE CANYON TRANSITION (FFU6.BCE): From over FFU VORTAC via FFU R-170 and BCE R-351 to BCE VORTAC.

DELTA TRANSITION (FFU6.DTA): From over FFU VORTAC via FFU R-170 and DTA R-048 to DTA VORTAC.

HANKSVILLE TRANSITION (FFU6.HVE): From over FFU VORTAC via FFU R-145 and HVE R-313 to HVE VORTAC.

MILFORD TRANSITION (FFU6.MLF): From over FFU VORTAC via FFU R-170 and MLF R-026 to MLF VORTAC.

LOC/DME I-UTJ <u>111.5</u> Chan 52	APP CRS 346°	Rwy Idg 9272 TDZE 4224 Apt Elev 4227
--	-----------------	--

ILS or LOC/DME RWY 35

SALT LAKE CITY INTL (SLC)







For inoperative MALSR, increase S-ILS 35 all Cats visibility to RVR 4000 and S-LOC 35 Cat E visibility to 1¾.



MISSED APPROACH: Climb to 9000 via left turn direct TCH VORTAC and TCH VORTAC R-326 to POGJI/TCH21.9 DME and hold.

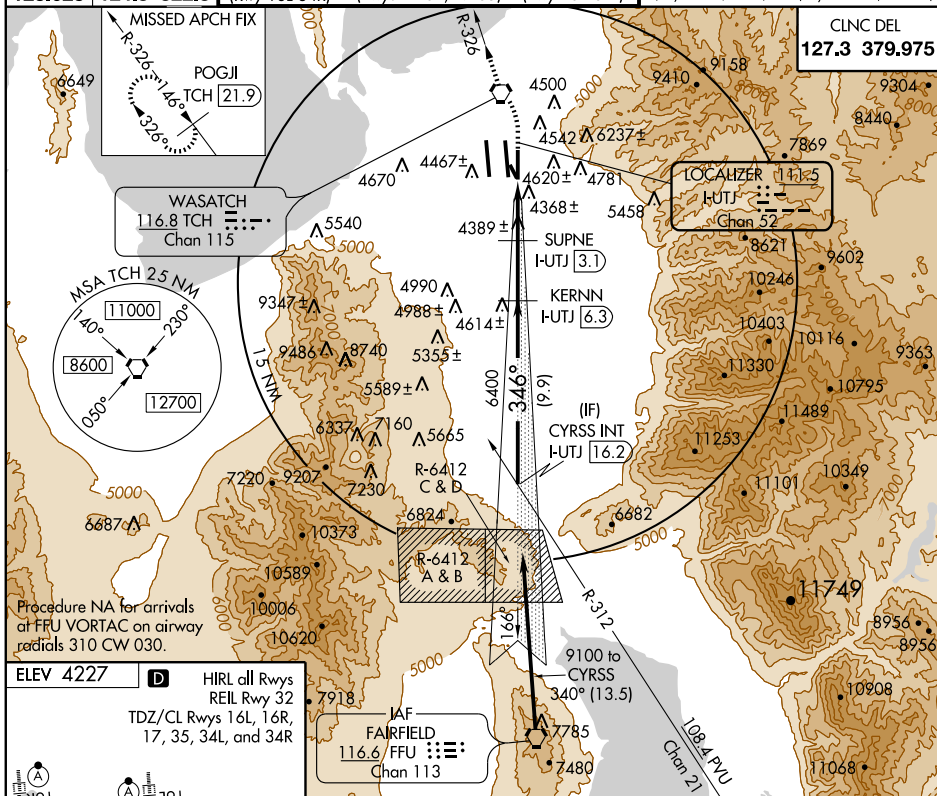ATIS	SALT LAKE CITY	SALT LAKE CITY TOWER						GND CON			
124.75	APP CON	119.05	257.8	118.3	257.8	132.65	336.4	121.9	348.6	133.65	348.6
125.625	124.3 322.3	(Rwy 16L-34R)		(Rwys 14-32, 17-35)		(Rwy 16R-34L)		(Rwys 14-32, 17-35)		(Rwys 16L-34R, 16R-34L)	

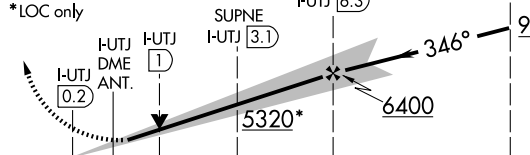

9000 	TCH  116.8	TCH R-326	POGJI TCH 21.9	VGSI and ILS glidepath not coincident.	CYRSS INT I-UTJ 16.2	
<p>*LOC only</p>  <p>9100</p> <p>Procedure Turn NA</p> <p>GS 3.00° TCH 53</p>						
CATEGORY	A		B	C	D	E
S-ILS 35	4424/18 200 (200-½)					4424/24 200 (200-½)
S-LOC 35	4700/24	476 (500-½)	4700/40 476 (500-¾)	4700/50 476 (500-1)	4700/60 476 (500-1¼)	

ILS or LOC RWY 16L

SALT LAKE CITY INTL (SLC)

LOC/DME I-MOY 109.5 Chan 32	APP CRS 161°	Rwy Idg 12004 TDZE 4227 Apt Elev 4227
---	------------------------	--

ALSF-2




MISSED APPROACH: Climb to 4800, then climb to 10000 via FFU VORTAC R-341 to FFU VORTAC and hold.

ATIS 124.75 125.625	SALT LAKE CITY APP CON 124.3 322.3	SALT LAKE CITY TOWER 119.05 257.8 (Rwy 16L-34R) 118.3 257.8 (Rwys 14-32, 17-35) 132.65 336.4 (Rwy 16R-34L)	GND CON 121.9 348.6 (Rwys 14-32, 17-35) 133.65 348.6 (Rwys 16L-34R, 16R-34L)
---	---	--	--

CLNC DEL
127.3 379.975

Procedure NA for arrivals on OGD VORTAC airway radials 068 CW 153.

IAF
OGDEN
115.7 OGD
Chan 104



STACO
TCH **20**



MISSED APCH FIX

FAIRFIELD
FFU
116.6
Chan 113

ALTERNATE MISSED
APCH FIX



LOCALIZER **109.5**
I-MOY
Chan 32

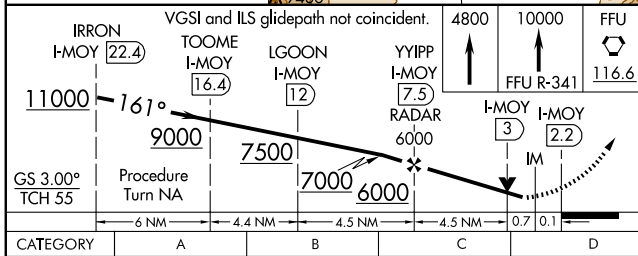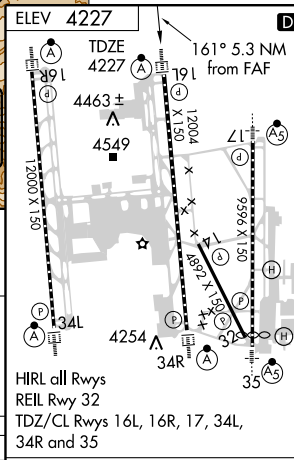


CATEGORY	A	B	C	D
S-ILS 16L	4427/18	200 (200-½)		
S-LOC 16L	4560/24	333 (400-½)	4560/40 333 (400-¾)	
Knots	60	90	120	150
Min:Sec	5:17	3:32	2:39	2:07

Simultaneous approach authorized with Rwy 16L.
DME or RADAR required.


ALSF-2

MISSED APPROACH: Climb to 4800, then climbing right turn to 9000 via heading 300° and TCH R-249 to STACO INT/TCH 20 DME and hold.

ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER				GND CON			
124.75		119.05	257.8	118.3	257.8	132.65	336.4	121.9	348.6
125.625	124.3 322.3	(Rwy 16L-34R)	(Rwys 14-32, 17-35)	(Rwy 16R-34L)		(Rwys 14-32, 17-35)		(Rwys 16L-34R, 16R-34L)	

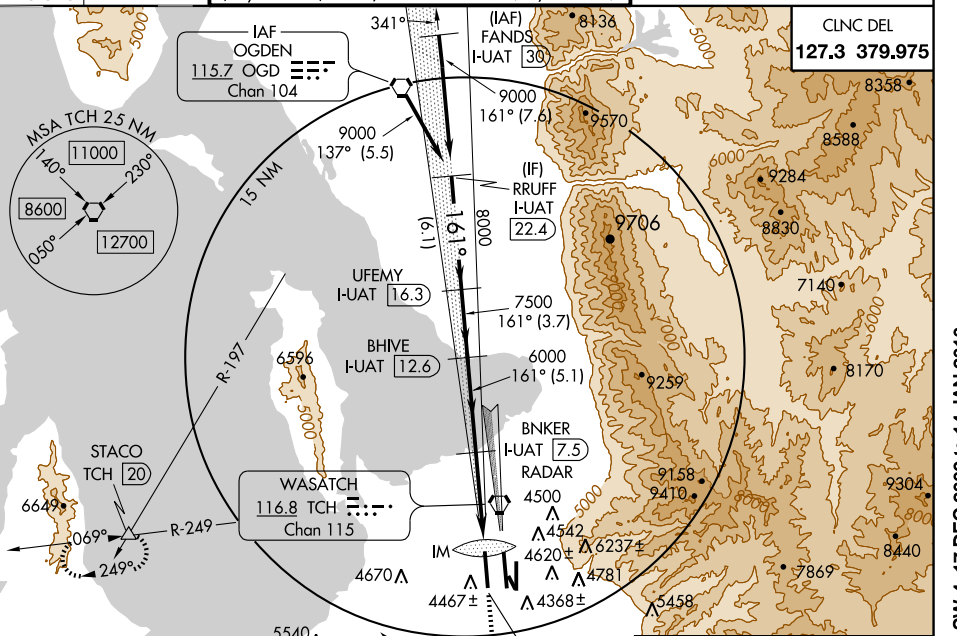

Procedure NA for arrivals on OGD VORTAC airway radials 068 CW 153.

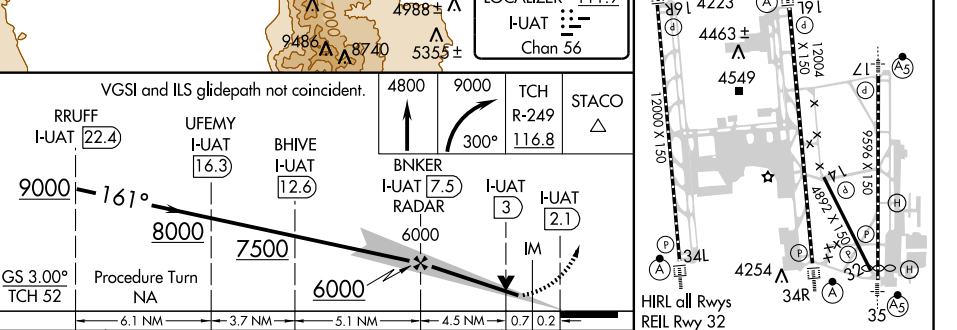

CATEGORY	A	B	C	D
S-ILS 16R	4423/18 200 (200-½)			
S-LOC 16R	4580/24 357 (400-½)			4580/40 357 (400-¾)

FAF to MAP 5.3 NM

Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

<div><div>4800</div><div>↑</div></div> <div><div>9000</div><div>TCH</div><div>R-249</div></div> <div><div>STACO</div><div>△</div></div> <div><div>VGSI and ILS glidepath not coincident.</div><div>Procedure Turn NA</div></div> <div><div>FLAG</div><div>I-UUH 5.5</div><div>RADAR</div></div> <div><div>DUNLP</div><div>I-UUH 15.3</div></div> <div><div>CAMRI</div><div>I-UUH 17.1</div></div> <div><div>PUTER</div><div>I-UUH 20.3</div></div> <div><div>I-UUH 1.1</div><div>FALM</div><div>I-UUH 0.3</div></div> <div><div>6100</div><div>6100</div></div> <div><div>341°</div><div>10000</div><div>8500</div><div>9000</div><div>GS 3.00°</div><div>TCH 55</div></div> <div><div>IM</div><div>0.1</div><div>0.4</div><div>0.8</div><div>4.4 NM</div><div>9.8 NM</div><div>1.8 NM</div><div>3.2 NM</div></div>	<div><div>CATEGORY</div><div>A</div><div>B</div><div>C</div><div>D</div></div> <div><div>S-ILS 34L</div><div>4426/18 200 (200-½)</div></div> <div><div>S-LOC 34L</div><div>4700/24 474 (500-½)</div><div>4700/40 474 (500-¾)</div><div>4700/50 474 (500-1)</div></div>
---	--

Figure 1 is a typical ILS chart. It includes a plan view on the left showing the runway layout (34L, 34R, 35, 36R) and a profile view on the right showing the glide path (341°) and various altitudes (9000, 11000, 9500, 7100, 6100). The chart also displays various navigation aids (TCH, OGD, BESBE, SCOER, ATANE, PLAGE) and their associated frequencies and altitudes. A table at the bottom provides the FAF to MAP 5.2 NM distance and the S-ILS and S-LOC frequencies.

FAF to MAP 5.2 NM					
Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

CATEGORY	A	B	C	D
S-ILS 34R	4422/18	200 (200-½)		
S-LOC 34R	4620/24	398 (400-½)		4620/40 398 (400-¾)

LOC/DME I-MOY <u>109.5</u> Chan 32	APP CRS 161°	Rwy Idg 12004 TDZE 4227 Apt Elev 4227
--	-----------------	---

ILS RWY 16L (CAT II)
SALT LAKE CITY INTL (SLC)

Simultaneous approach authorized with Rwy 16R.
DME or RADAR required.

ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER			GND CON	
124.75		119.05 257.8	118.3 257.8	132.65 336.4	121.9 348.6	133.65 348.6
125.625	124.3 322.3	(Rwy 16L-34R)	(Rwys 14-32, 17-35)	(Rwy 16R-34L)	(Rwys 14-32, 17-35)	(Rwys 16L-34R, 16R-34L)

Procedure NA for arrivals on OGD VORTAC airway radials 068 CW 153.

CLNC DEL
127.3 379.975

[illegible]

CATEGORY	A	B	C	D
S-ILS 16L	RA 108/12 100 DA 4327			

CATEGORY II ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED	REIL Rwy 32 TDZ/CL Rwy's 16L, 16R, 17, 34L, 34R and 35
--	--

SW-4. 17 DEC 2009 to 14 JAN 2010



LOC/DME I-MOY	APP CRS	Rwy Idg	12004
109.5	161°	TDZE	4227
Chan 32		Apt Elev	4227

Simultaneous approach authorized with Rwy 16R.
DME or RADAR required.


ALSF-2

MISSED APPROACH: Climb to 4800, then climb to 10000 via FFU VORTAC R-341 to FFU VORTAC and hold.

ATIS	SALT LAKE CITY	SALT LAKE CITY TOWER		GND CON	
124.75	APP CON	119.05	257.8	118.3	257.8
125.625	124.3 322.3	(Rwy 16L-34R)	(Rwys 14-32, 17-35)	132.65	336.4
				(Rwy 16R-34L)	(Rwys 14-32, 17-35)
				121.9	348.6
					(Rwys 16L-34R, 16R-34L)

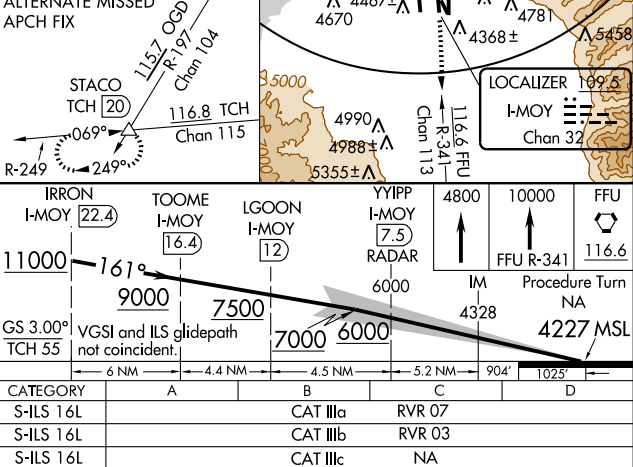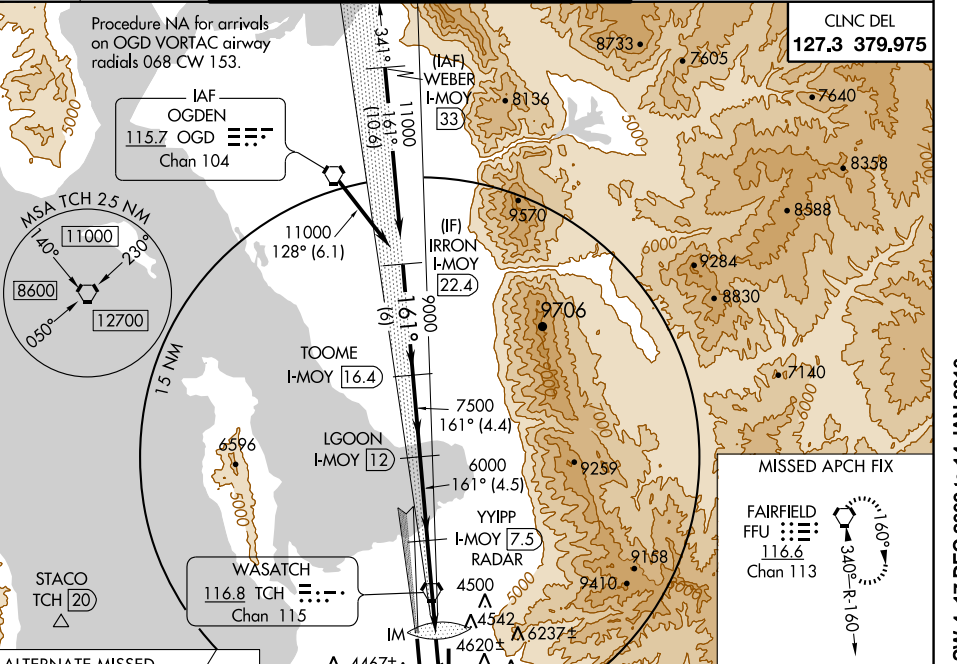

CATEGORY III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

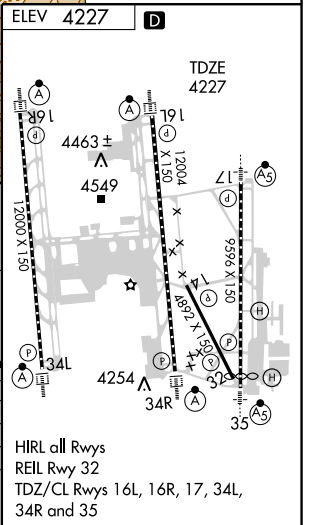

SW-4. 17 DEC 2009 to 14 JAN 2010

LOC/DME I-UAT 111.9 Chan 56	APP CRS 161°	Rwy Idg 12000 TDZE 4223 Apt Elev 4227
---	------------------------	--


ILS RWY 16R (CAT II)
SALT LAKE CITY INTL (SLC)

T Simultaneous approach authorized with Rwy 16L.
DME or RADAR required.



ALSF-2

MISSED APPROACH: Climb to 4800, then climbing right turn to 9000 via heading 300° and TCH R-249 to STACO INT/TCH 20 DME and hold.

ATIS	SALT LAKE CITY	SALT LAKE CITY TOWER				GND CON			
124.75	APP CON	119.05 257.8	118.3 257.8	132.65 336.4		121.9 348.6	133.65 348.6		
125.625	124.3 322.3	(Rwy 16L-34R)	(Rwys 14-32, 17-35)	(Rwy 16R-34L)		(Rwys 14-32, 17-35)	(Rwys 16L-34R, 16R-34L)		

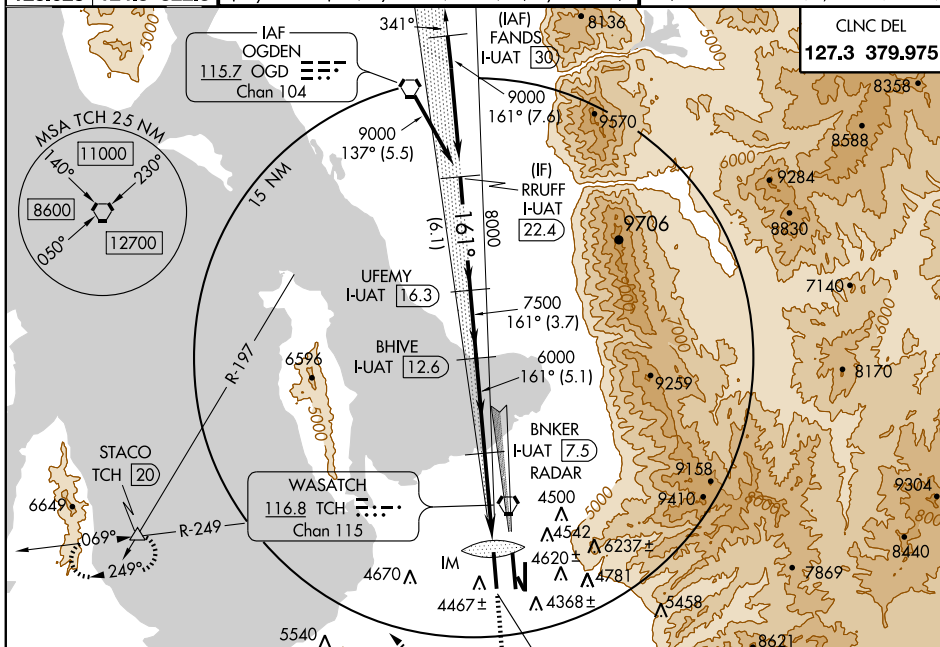

Procedure NA for arrivals on OGD
VORTAC airway radials 068 CW 153.

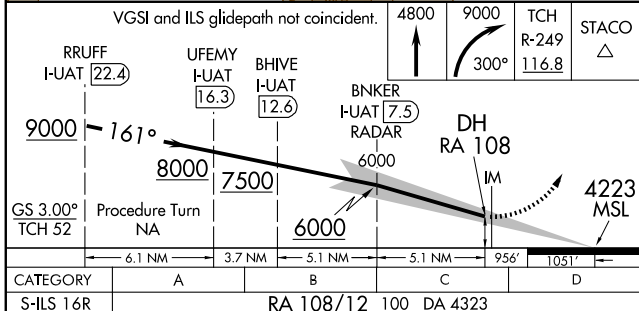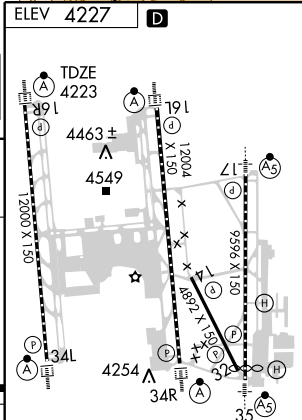

HIRL all Rwy
REIL Rwy 32
TDZ/CL Rwy 16L, 16R, 17, 34L,
34R, and 35


CATEGORY II ILS - SPECIAL AIRCREW
& AIRCRAFT CERTIFICATION REQUIRED

Simultaneous approach authorized with Rwy 16L.
DME or RADAR required.

ALSF-2

MISSED APPROACH: Climb to 4800, then climbing right turn to 9000 via heading 300° and TCH R-249 to STACO INT/TCH 20 DME and hold.

ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER				GND CON	
124.75		119.05	257.8	118.3	257.8	132.65	336.4
125.625	124.3 322.3	(Rwy 16L-34R)		(Rwys 14-32, 17-35)		(Rwys 14-32, 17-35)	
				(Rwy 16R-34L)		(Rwys 16L-34R, 16R-34L)	

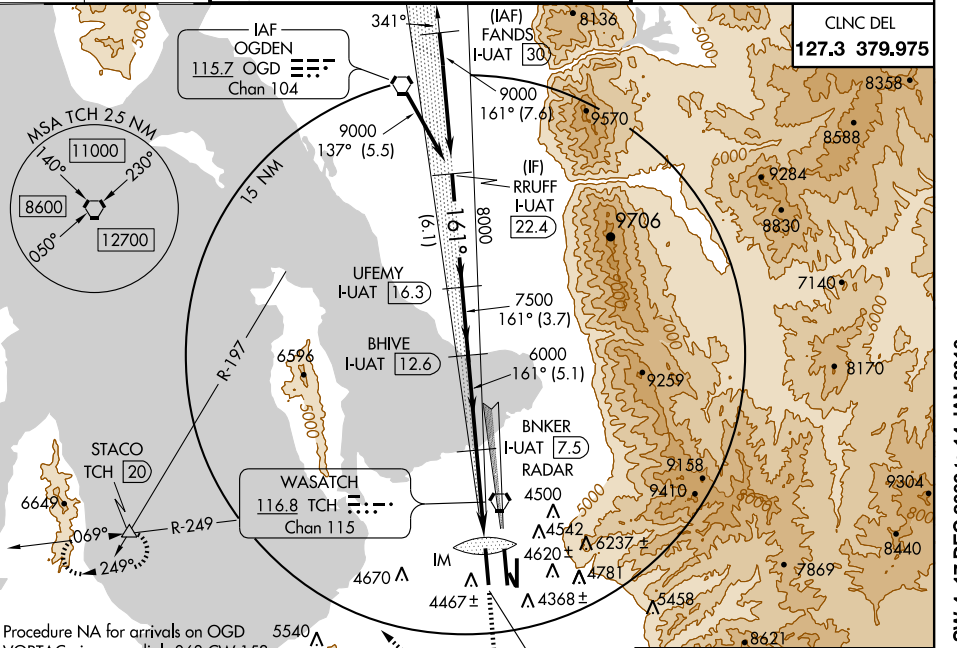

Procedure NA for arrivals on OGD VORTAC airway radials 068 CW 153.

Procedure Turn NA

VGSI and ILS glidepath not coincident.

RRUFF I-UAT 22.4

UFEMY I-UAT 16.3

BHIVE I-UAT 12.6

BNKER I-UAT 7.5

RADAR

IM

4800

9000

TCH R-249 116.8

STACO

4223 MSL

6000

7500

8000

9000

161°

GS 3.00° TCH 52

6.1 NM

3.7 NM

5.1 NM

5.1 NM

934'

1051'

CATEGORY	A	B	C	D
S-ILS 16R		Cat IIIa	RVR 07	
S-ILS 16R		Cat IIIb	RVR 03	
S-ILS 16R		Cat IIIc	NA	

CATEGORY III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

HIREL all Rwys

REIL Rwy 32

TDZ/CL Rwys 16L, 16R, 17, 34L, 34R, and 35

SW-4. 17 DEC 2009 to 14 JAN 2010

LOC/DME I-BNT <u>111.5</u> Chan 52	APP CRS 166°	Rwy Idg 9596 TDZE 4219 Apt Elev 4227
--	-----------------	--


ILS RWY 17
SALT LAKE CITY INTL (SLC)

T For inoperative MALSR, increase S-ILS 17 Cat. E visibility to RVR 4000 and S-LOC 17 Cat. E visibility to 1½.

MALSR

MISSED APPROACH: Climb to 5800, then climb to 10000 direct FFU VORTAC and hold.

ATIS	SALT LAKE CITY	SALT LAKE CITY TOWER			GND CON	
124.75	APP CON	119.05 257.8	118.3 257.8	132.65 336.4	121.9 348.6	133.65 348.6
125.625	124.3 322.3	(Rwy 16L-34R)	(Rwys 14-32, 17-35)	(Rwy 16R-34L)	(Rwys 14-32, 17-35)	(Rwys 16L-34R, 16R-34L)





MSA TCH 25 NM


RADAR REQUIRED

CLNC DEL

127.3 379.975

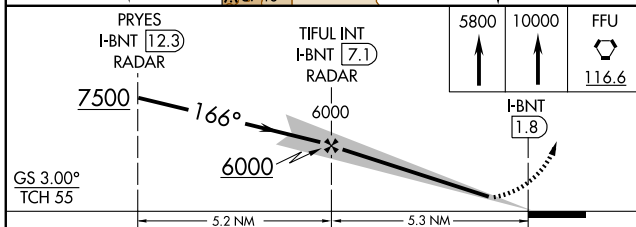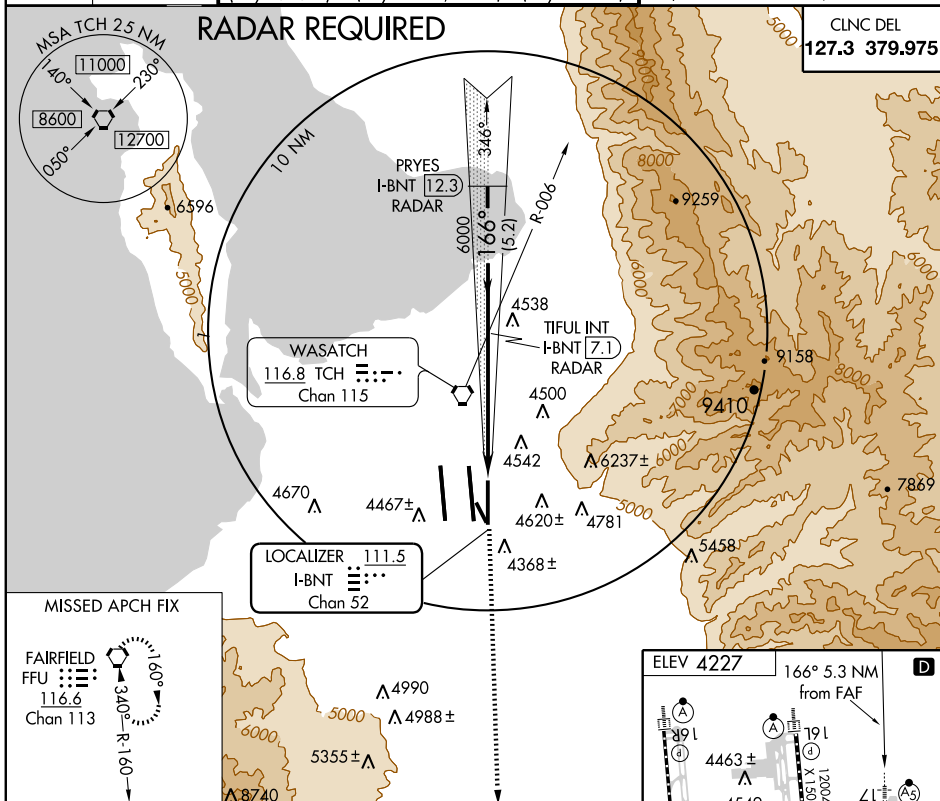

CATEGORY	A	B	C	D	E
S-ILS 17	4419/18		200 (200-½)		4419/24 200 (200-½)
S-LOC 17	4620/24 401 (400-½)		4620/40 401 (400-¾)		4620/50 401 (400-1)
CIRCLING	NA				

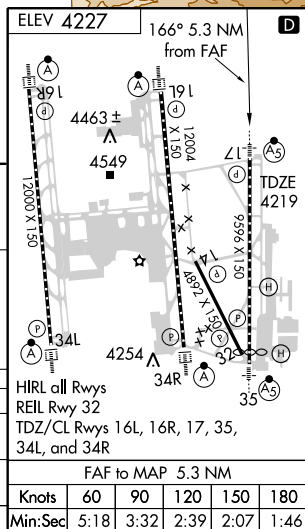

LOC/DME I-UUH	APP CRS	Rwy Idg	12000
111.9	341°	TDZE	4226
Chan 56		Apt Elev	4227

Simultaneous approach authorized with Rwy 34R.
DME or RADAR required.

ALSF-2

MISSED APPROACH: Climb to 4800, then climbing left turn to 9000 via TCH R-249 to STACO INT/TCH 20 DME and hold.

ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER				GND CON	
124.75		119.05	257.8	118.3	257.8	132.65	336.4
125.625	124.3 322.3	(Rwy 16L-34R)	(Rwys 14-32, 17-35)	(Rwy 16R-34L)	(Rwys 14-32, 17-35)	121.9	348.6
							133.65 348.6
							(Rwys 16L-34R, 16R-34L)

Topographic map of the Salt Lake City area showing the ILS RWY 34L approach. Key features include: STACO TCH 20, LOCALIZER I-UUH 111.9 Chan 56, MSA TCH 25 NM, and various elevation points such as 4500, 4542, 4620, 4781, 4368, 4467, 4559, 4990, 4988, 5355, 5589, 6337, 7160, 5665, 8500, 6824, 9000, 10000, 7785, 7480, 10000 to PUTER 296° (5.3) and LOC (8.2). The map also shows the WASATCH TCH 115 and various other landmarks and terrain features.

Inset map showing the airport layout with runways 34L, 34R, 35, and 36. Includes elevation 4227 and various navigation aids like STACO, PUTER, and BOAGY.

HIRL all Rws
REIL Rwy 32
TDZ/CL Rwys 16L, 16R, 17, 35, 34L, and 34R



Diagram of the ILS RWY 34L approach. Shows the glidepath from 4800 to 9000, the DH RA 102, and the procedure turn NA. Includes various navigation aids like STACO, PUTER, and BOAGY.



CATEGORY	A	B	C	D
S-ILS 34L				
RA 102/12 100 DA 4326				
CATEGORY II ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED				

SW-4. 17 DEC 2009 to 14 JAN 2010

LOC/DME I-UUH 111.9 Chan 56	APP CRS 341°	Rwy Idg 12000 TDZE 4226 Apt Elev 4227
---	------------------------	--

ILS RWY 34L (CAT III)
SALT LAKE CITY INTL (SLC)

	Simultaneous approach authorized with Rwy 34R. DME or RADAR required.		ALSF-2 	MISSED APPROACH: Climb to 4800, then climbing left turn to 9000 via TCH R-249 to STACO INT/TCH 20 DME and hold.	
	ATIS 124.75 125.625	SALT LAKE CITY APP CON 124.3 322.3	SALT LAKE CITY TOWER 119.05 257.8 118.3 257.8 132.65 336.4 (Rwys 16L-34R) (Rwys 14-32, 17-35) (Rwy 16R-34L)		

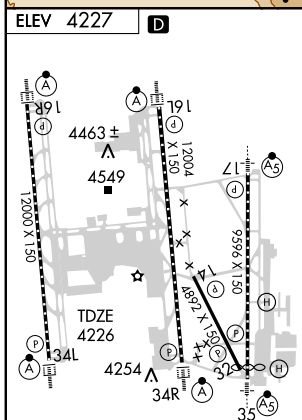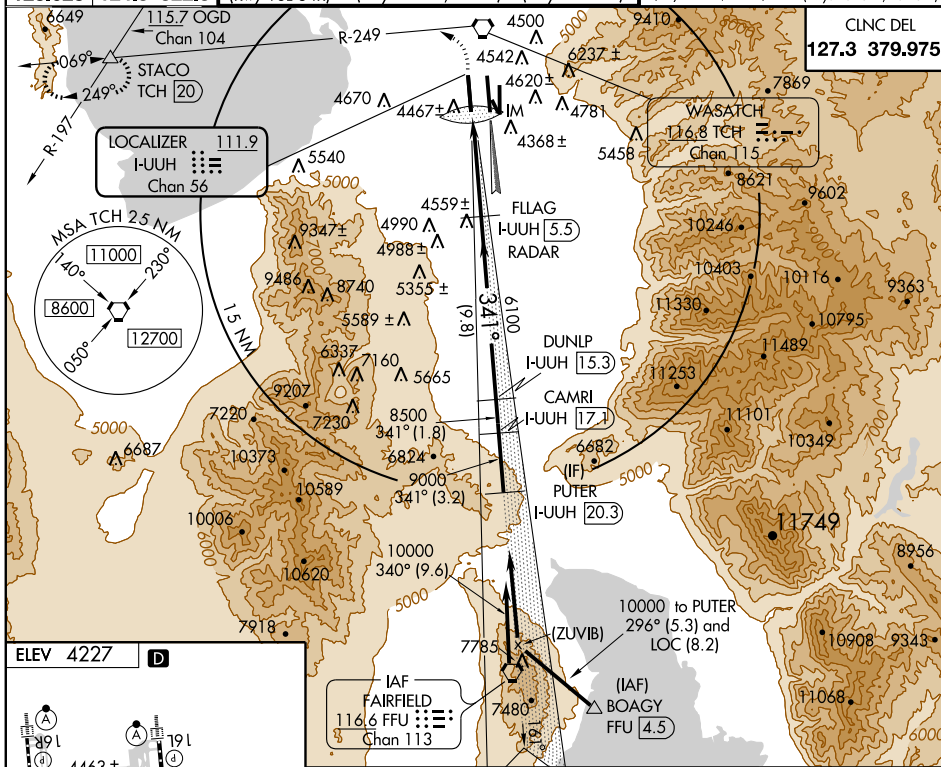

H|RL a|| Rwys

REIL Rwy 32

TDZ/CL Rwy 16L, 16R, 17, 35, 34L,
and 34R

Diagram illustrating the ILS glidepath for S-ILS 34L. The glidepath is shown as a line starting from 4226 MSL and ending at 9000 feet. Key points along the path include IM at 4326, RADAR at 6100, and DUNLP at 8500. The path is 5.5 NM long. The diagram also shows the VGS1 and ILS glidepath not coincident. The diagram includes a table with the following data:

CATEGORY	A	B	C	D
S-ILS 34L		CAT IIIa	RVR 07	
S-ILS 34L		CAT IIIb	RVR 03	
S-ILS 34L		CAT IIIc	NA	

CATEGORY III ILS - SPECIAL AIRCREW
& AIRCRAFT CERTIFICATION REQUIRED




LOC/DME I-SLC 109.5 Chan 32	APP CRS 341°	Rwy Idg 12004 TDZE 4222 Apt Elev 4227
---	------------------------	--

ILS RWY 34R (CAT II) **SALT LAKE CITY INTL (SLC)**

Simultaneous approach authorized with Rwy 34L. DME or RADAR required.	ALSF-2 	MISSED APPROACH: Climb to 9000 direct TCH VORTAC then via TCH R-331 to OGD VORTAC and hold.
--	-------------------	--

ATIS 124.75 125.625	SALT LAKE CITY APP CON 124.3 322.3	SALT LAKE CITY TOWER 119.05 257.8 (Rwy 16L-34R) 118.3 257.8 (Rwys 14-32, 17-35) 132.65 336.4 (Rwy 16R-34L)	GND CON 121.9 348.6 (Rwys 14-32, 17-35) 133.65 348.6 (Rwys 16L-34R, 16R-34L)
--	---	---	---

MISSED APCH FIX 	OGDEN OGD 115.7 Chan 104	CLNC DEL 127.3 379.975
----------------------------	--	---

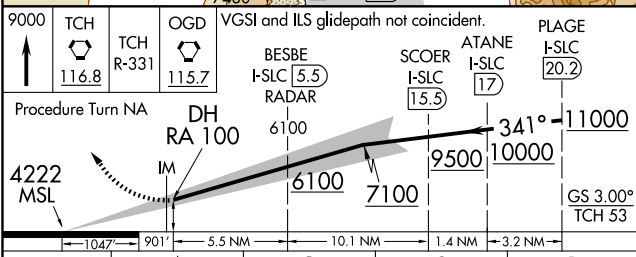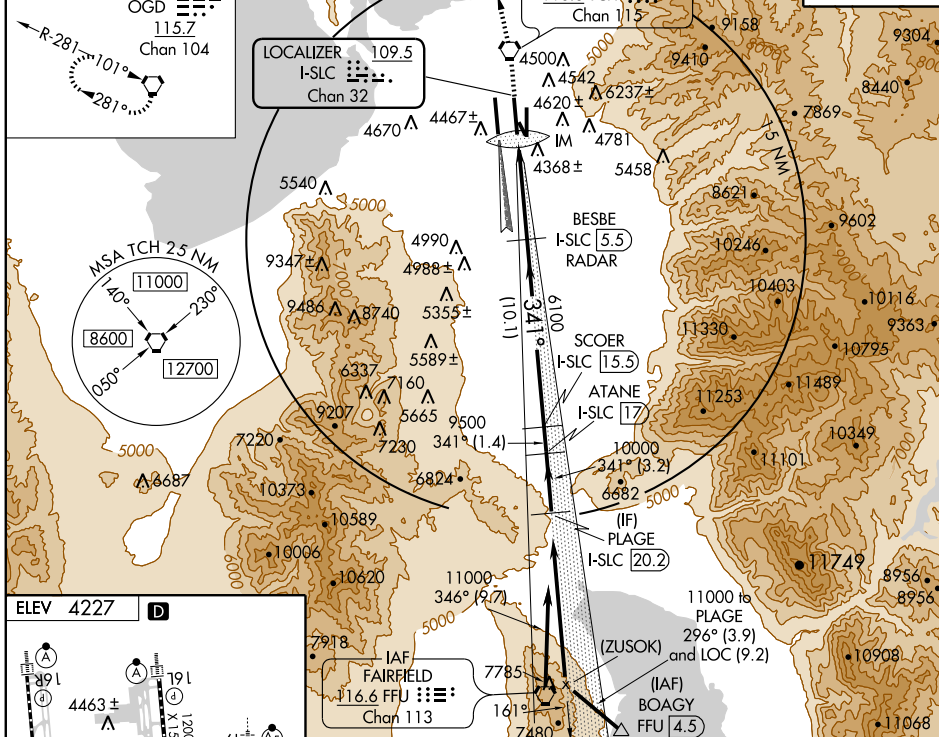

HIRL all Rwys
 REIL Rwy 32
 TDZ/CL Rwys 16L, 16R, 17, 35,
 34L, and 34R



**CATEGORY II ILS - SPECIAL AIRCREW
 & AIRCRAFT CERTIFICATION REQUIRED**

Simultaneous approach authorized with Rwy 34L.
DME or RADAR required.

ALSF-2

MISSED APPROACH: Climb to 9000 direct TCH VORTAC then via TCH R-331 to OGD VORTAC and hold.

ATIS 124.75 125.625	SALT LAKE CITY APP CON 124.3 322.3	SALT LAKE CITY TOWER 119.05 257.8 (Rwy 16L-34R)	118.3 257.8 (Rwys 14-32, 17-35)	132.65 336.4 (Rwy 16R-34L)	GND CON 121.9 348.6 (Rwys 14-32, 17-35)	133.65 348.6 (Rwys 16L-34R, 16R-34L)
---------------------------	--	---	------------------------------------	-------------------------------	---	---

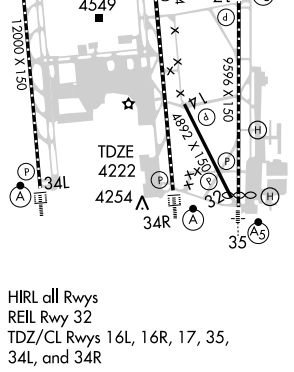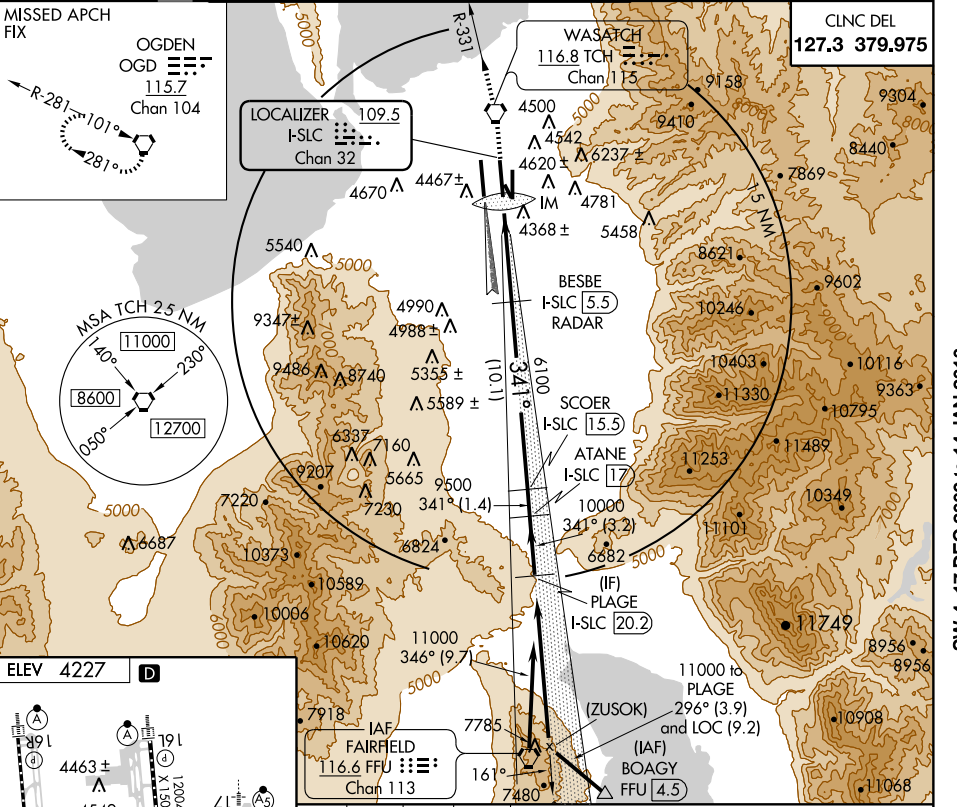

9000	TCH 116.8	TCH R-331	OGD 115.7	BESBE I-SLC 5.5 RADAR	SCOER I-SLC 15.5	ATANE I-SLC 17	PLAGE I-SLC 20.2
4222 MSL	GS 3.00° TCH 53	IM 4319	6100	6100	7100	9500	10000
1047'	841'	5.5 NM	10.1 NM	1.4 NM	3.2 NM		
CATEGORY	A	B	C	D			
S-ILS 34R		CAT IIIa	RVR 07				
S-ILS 34R		CAT IIIb	RVR 03				
S-ILS 34R		CAT IIIc	NA				
CATEGORY III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED							

HIRL all Rws
REIL Rwy 32
TDZ/CL Rws 16L, 16R, 17, 35,
34L, and 34R

JAMMN FOUR ARRIVAL

ST-365 (FAA)

SALT LAKE CITY INTL
SALT LAKE CITY, UTAHSALT LAKE CITY APP CON
128.1 307.05
ATIS 124.75 125.625

OGDEN
115.7 OGD
Chan 104
N41°13.45' - W112°05.90'

After CHHIP INT, fly heading 340° for
vectors ILS/DME or VISUAL RWY 16R approach.

WASATCH
116.8 TCH
Chan 115

CHHIP
N40°37.16'
W112°03.70'

SPIEK
N40°28.75'
W112°06.58'

FAIRFIELD
116.6 FFU
Chan 113
N40°16.49' - W111°56.43'

JAMMN
N40°02.61'
W112°15.48'

LAZLO
N39°48.14'
W112°20.33'

DELTA
116.1 DTA
Chan 108
N39°18.14' - W112°30.33'

BEVRR
N38°50.49'
W112°45.35'

SLINA
N38°48.26'
W112°26.54'

MILFORD
112.1 MLF
Chan 58
N38°21.62' - W113°00.79'
L-9, H-3

BRYCE CANYON
112.8 BCE
Chan 75
N37°41.35' - W112°18.23'
L-9, H-3

SW-4, 17 DEC 2009 to 14 JAN 2010

NOTE: DME required.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

ARRIVAL DESCRIPTION

BRYCE CANYON TRANSITION (BCE.JAMMN4): From over BCE VORTAC via BCE R-339 and DTA R-158 to DTA VORTAC. Then via DTA R-358 to JAMMN INT. Thence....

MILFORD TRANSITION (MLF.JAMMN4): From over MLF VORTAC via MLF R-007 and DTA R-187 to DTA VORTAC. Then via DTA R-358 to JAMMN INT. Thence....

....From over JAMMN INT via TCH R-179 to CHHIP INT. After CHHIP INT, fly heading 340° for vectors to ILS/DME or VISUAL Rwy 16R approach.


LOST COMMUNICATIONS:

In the event of lost communications, at CHHIP INT proceed direct OGD VORTAC. Maintain 11,000 until OGD VORTAC.

LEEHHY THREE ARRIVAL (RNAV)


ST-365 (FAA)

SALT LAKE CITY INTL
SALT LAKE CITY, UTAH

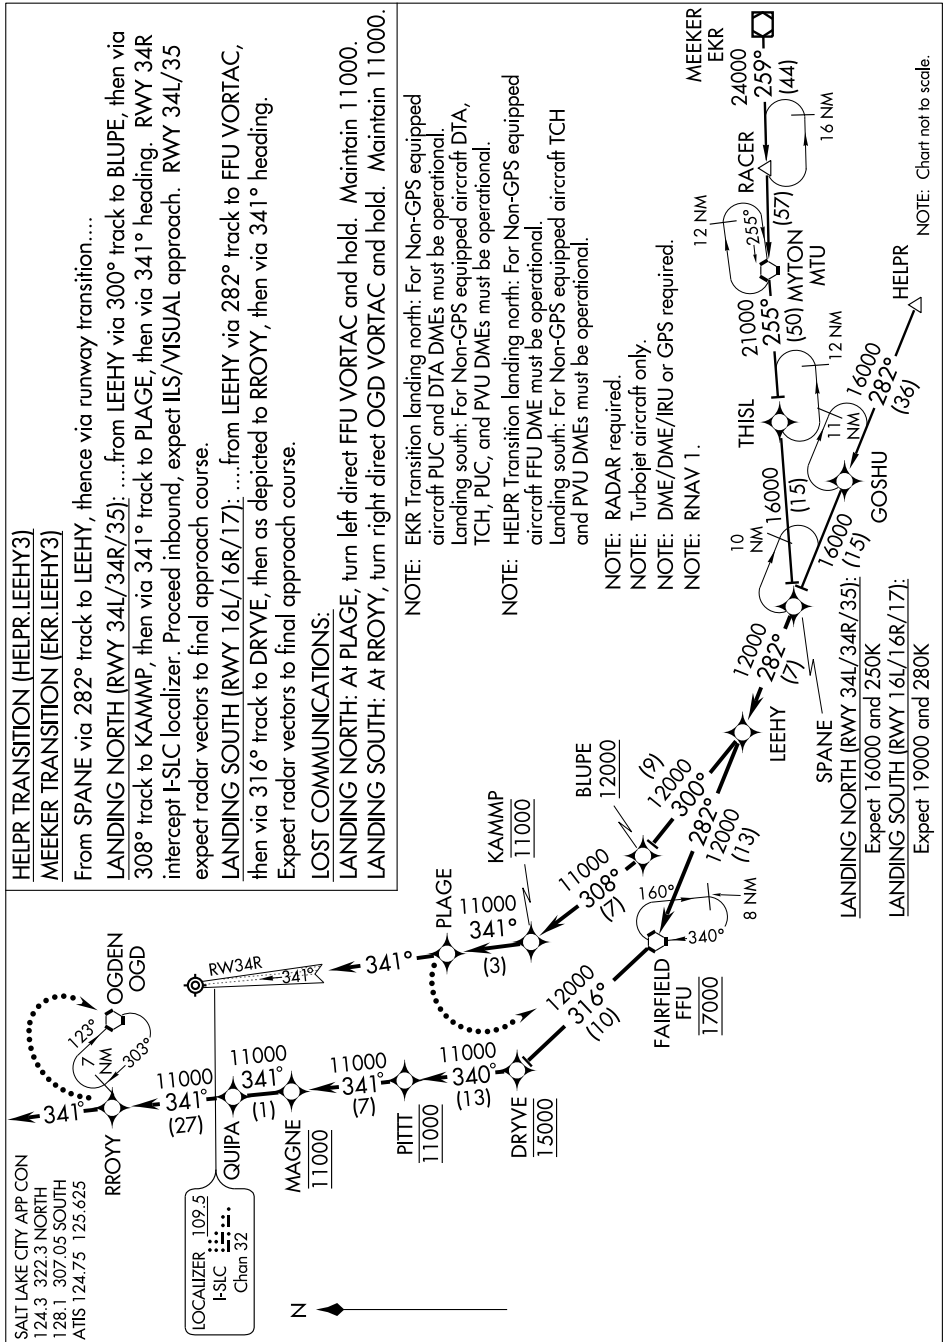

LEETZ TWO DEPARTURE (RNAV)

SALT LAKE CITY, UTAH

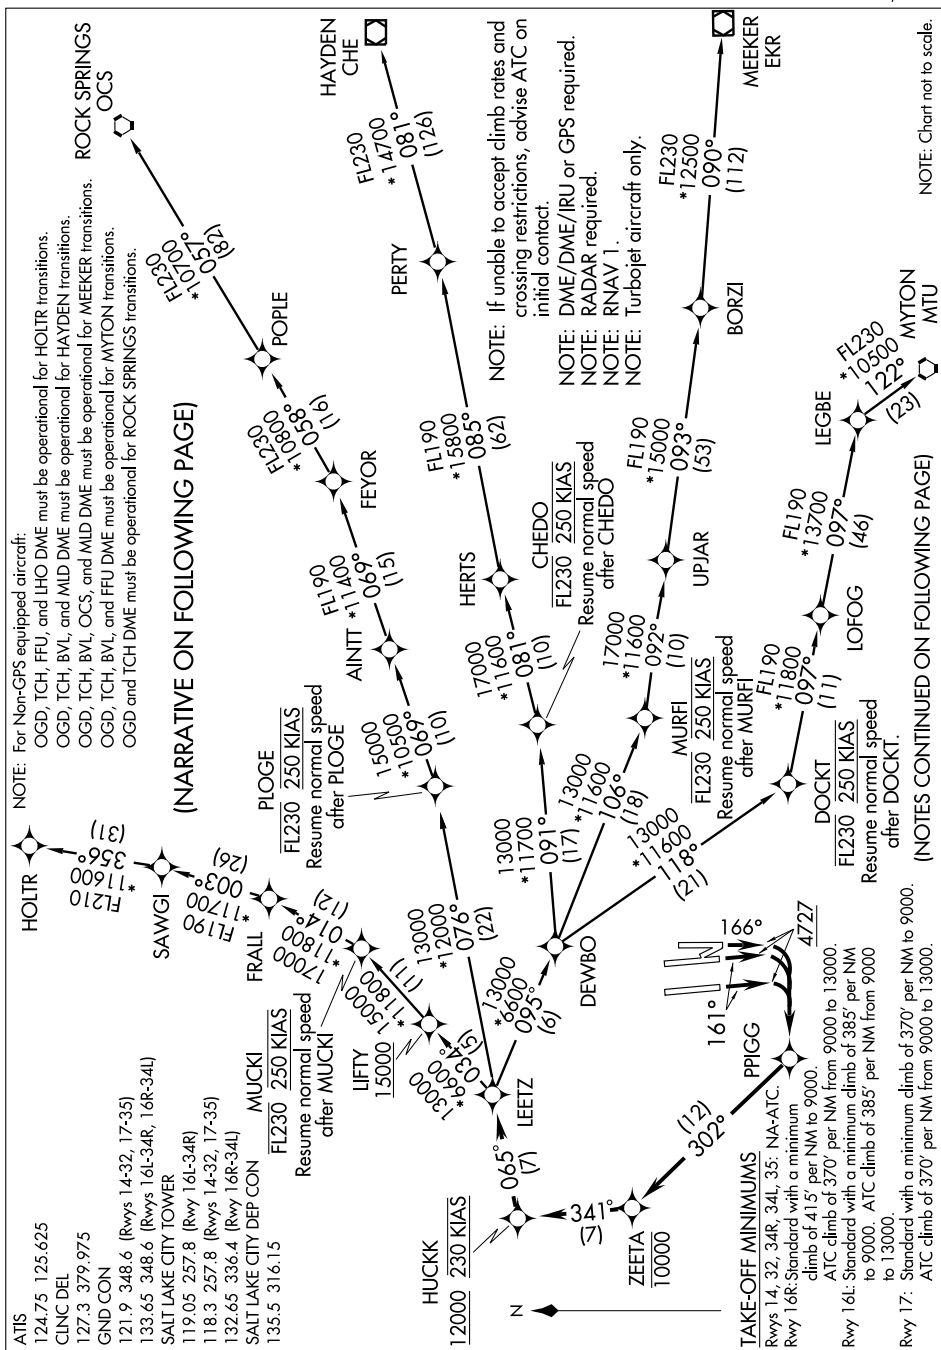

NOTE: Chart not to scale.

SW-4 17 DEC 2009 to 14 JAN 2010

LEETZ TWO DEPARTURE (RNAV)



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAYS 16R/16L: Climb heading 161° to 4727, then right turn direct PPIGG, then via depicted route to LEETZ, thence....

TAKE-OFF RUNWAY 17: Climb heading 166° to 4727, then right turn direct PPIGG, then via depicted route to LEETZ, thence....

....via (transition) maintain FL230 or lower filed altitude. Expect filed altitude 10 minutes after departure.

HAYDEN TRANSITION (LEETZ2.CHE)

HOLTR TRANSITION (LEETZ2.HOLTR)

MEEKER TRANSITION (LEETZ2.EKR)

MYTON TRANSITION (LEETZ2.MTU)

ROCK SPRINGS TRANSITION (LEETZ2.OCS)

TAKE-OFF NOTES CONT.


TAKE-OFF OBSTACLES

Rwy 16L, 16R, and 17: Multiple light poles beginning 988' from DER, 689' right of centerline, up to 34' AGL/4254' MSL.


Rwy 17: Vehicle on road 434' from DER, 518' right of centerline, 17' AGL/4237' MSL.

NORDK THREE ARRIVAL (RNAV)

ST-365 (FAA)

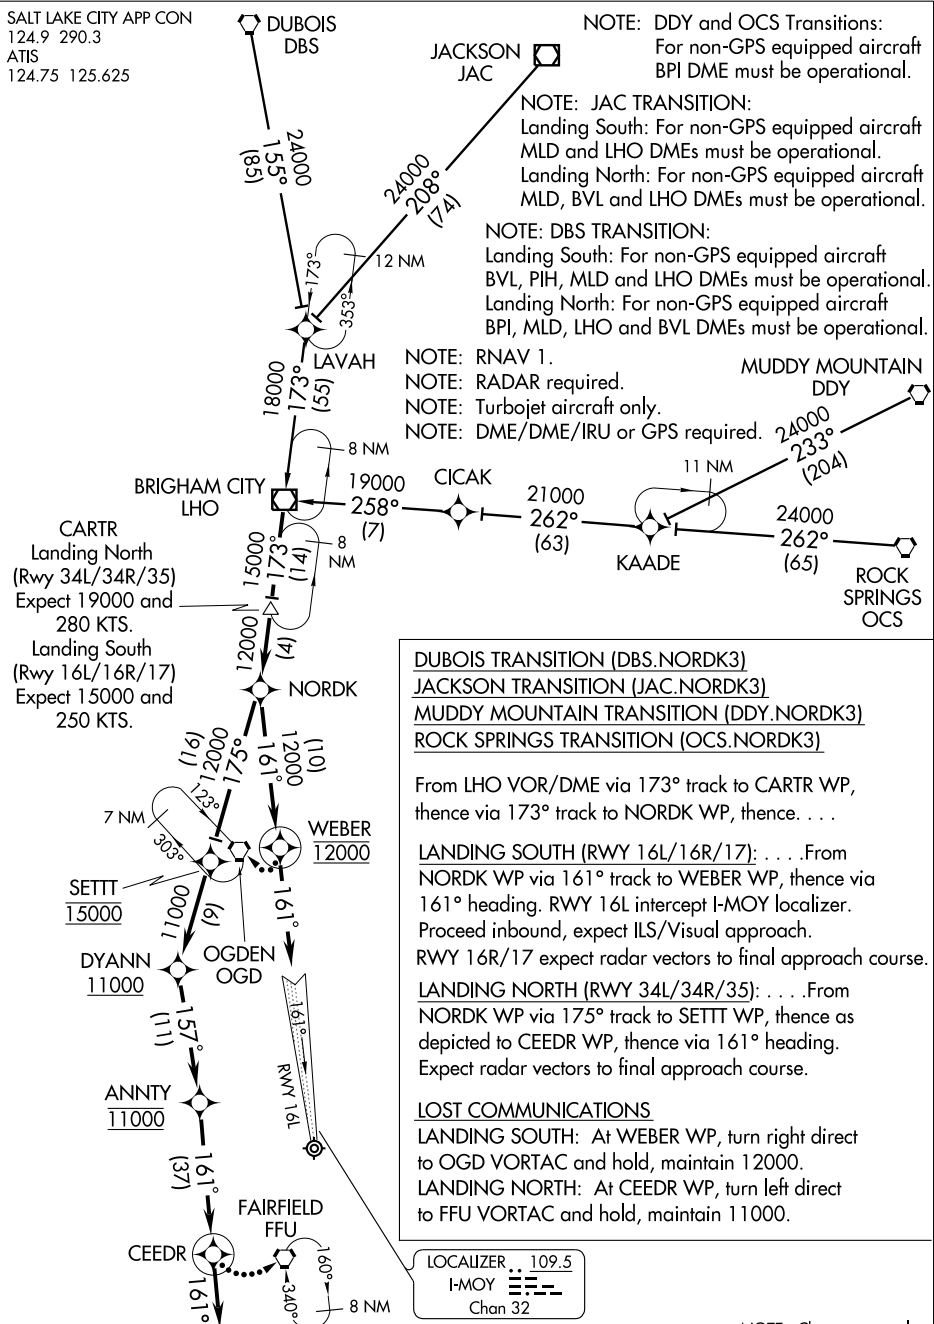SALT LAKE CITY INTL
SALT LAKE CITY, UTAHSALT LAKE CITY APP CON
124.9 290.3
ATIS
124.75 125.625

NSIGN ONE DEPARTURE (RNAV)

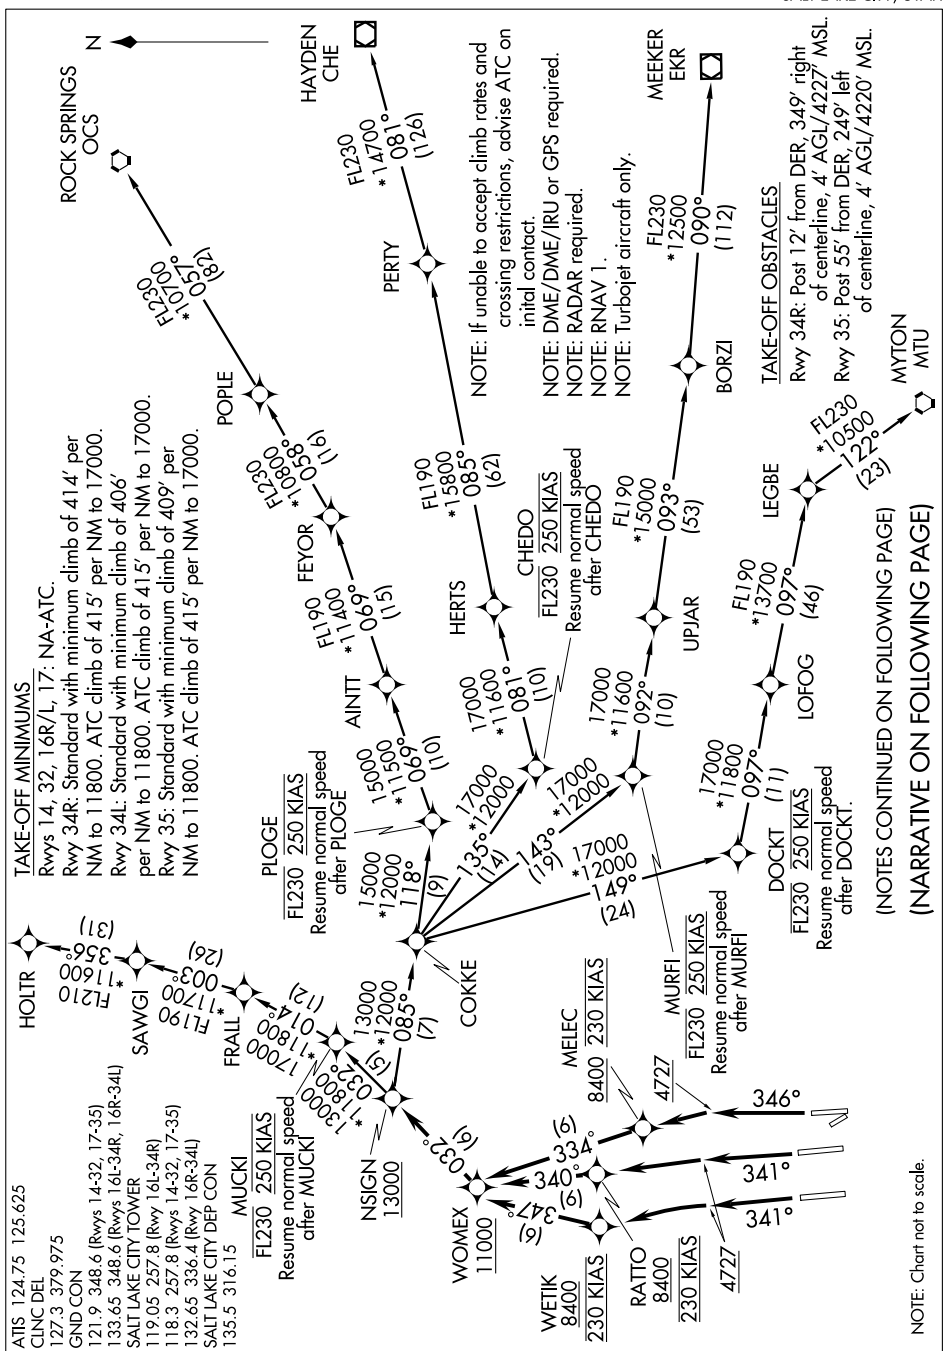

NSIGN ONE DEPARTURE (RNAV)



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 34R: Climb heading 341° to 4727, then left turn direct RATTO, then via depicted route to NSIGN, thence. . . .

TAKE-OFF RUNWAY 34L: Climb heading 341° to 4727, then direct WETIK then via depicted route to NSIGN, thence. . . .

TAKE-OFF RUNWAY 35: Climb heading 346° to 4727, then left turn direct MELEC, then via depicted route to NSIGN, thence. . . .

. . . .via (transition) maintain FL230 or lower filed altitude. Expect filed altitude 10 minutes after departure.

HAYDEN TRANSITION (NSIGN1.CHE)

HOLTR TRANSITION (NSIGN1.HOLTR)

MEEKER TRANSITION (NSIGN1.EKR)

MYTON TRANSITION (NSIGN1.MTU)

ROCK SPRINGS TRANSITION (NSIGN1.OCs)

Procedural Notes Cont.

NOTE: For Non-GPS equipped aircraft:

OGD, TCH, FFU, and LHO DMEs must be operational for HOLTR transitions.

OGD, TCH, BVL, and MLD DMEs must be operational for HAYDEN transitions.

OGD, TCH, BVL, OCS, and MLD DMEs must be operational for MEEKER transitions.

OGD, TCH, and MLD DMEs must be operational for MYTON transitions.

OGD and TCH DMEs must be operational for ROCK SPRINGS transitions.

PECOP TWO DEPARTURE (RNAV)

TAKE OFF OBSTACLES

Rwy 16L: Multiple light poles beginning 988' from DER, 689' right of centerline, up to 34' AGL/4254' MSL.


Rwy 17: Vehicle on road 434' from DER, 518' right of centerline, 17' AGL/4237' MSL.

Rwy 34R: Post 12' from DER, 349' right of centerline, 4' AGL/4227' MSL.

Rwy 35: Post 55' from DER, 249' left of centerline, 4' AGL/4220' MSL.

TAKE-OFF MINIMUMS

Rwys 14, 32: NA- ATC.
Rwy 16R: Standard with minimum climb of 413' per NM to 8300. ATC climb of 317' per NM to 14000.
Rwy 16L: Standard with minimum climb of 381' per NM to 8300. ATC climb of 331' per NM to 14000.
Rwy 17: Standard with minimum climb of 367' per NM to 7800. ATC climb of 341' per NM to 14000.
Rwys 34R, 34L, 35: ATC climb of 359' per NM to 14000.

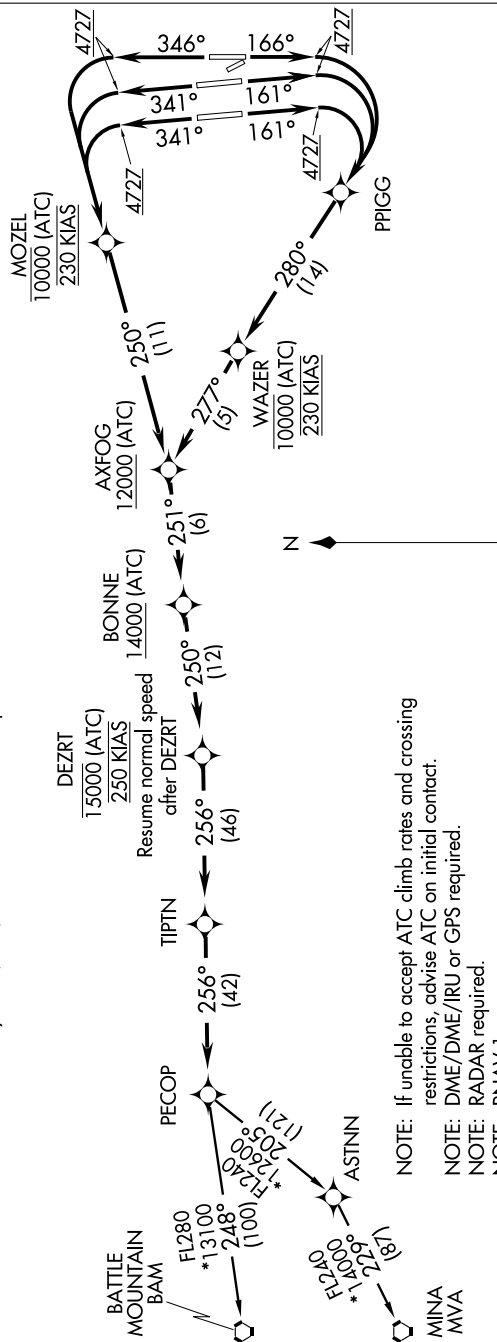

NOTE: If unable to accept ATC climb rates and crossing

restrictions, advise ATC on initial contact.

NOTE: DME/DME/IRU or GPS required.

NOTE: RADAR required.

NOTE: RNAV1.

NOTE: Turbojet aircraft only.

NOTE: For Non-GPS equipped aircraft:

OGD, TCH, BVL, LCU, and TWF DMEs must be operational for BATTLE MOUNTAIN transitions.

OGD, TCH, BVL, LCU, ILC, and MVA DMEs must be operational for MINA transitions departing Rwy 34R, 34L, 35.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

PECOP TWO DEPARTURE (RNAV)



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAYS 16R/16L: Climb heading 161° to 4727, then right turn direct PPIGG, then via depicted route to PECOP, thence....

TAKE-OFF RUNWAY 17: Climb heading 166° to 4727, then right turn direct PPIGG, then via depicted route to PECOP, thence....

TAKE-OFF RUNWAY 34R: Climb heading 341° to 4727, then left turn direct MOZEL, then via depicted route to PECOP, thence....

TAKE-OFF RUNWAY 34L: Climb heading 341° to 4727, then left turn direct MOZEL, then via depicted route to PECOP, thence....

TAKE OFF RUNWAY 35: Climb heading 346° to 4727, then left turn direct MOZEL, then via depicted route to PECOP, thence....

....via (transition) maintain 15000 or lower filed altitude. Expect filed altitude 10 minutes after departure.

BATTLE MOUNTAIN TRANSITION (PECOP2.BAM)

MINA TRANSITION (PECOP2.MVA)

QWENN THREE ARRIVAL (RNAV)

ST-365 (FAA)

SALT LAKE CITY INTL
SALT LAKE CITY, UTAHBRYCE CANYON TRANSITION (BCE.QWENN3)MILFORD TRANSITION (MLF.QWENN3)

LANDING NORTH (RWY 34R/34L/35): From QWENN WP via 358° track to FFU VORTAC, then as depicted to PLAGE WP, then via 341° heading. RWY 34R intercept I-SLC localizer. Proceed inbound, expect ILS/Visual approach. RWY 34L/35 expect radar vectors to final approach course.

LOST COMMUNICATIONS

At PLAGE WP, turn left direct to FFU VORTAC and hold. Maintain 11000.

NOTE: BRYCE CANYON TRANSITION:

For non-GPS equipped aircraft FFU and PVU DMEs must be operational.

NOTE: MILFORD TRANSITION:


For non-GPS equipped aircraft BVL and PVU DMEs must be operational.

NOTE: RADAR required.

NOTE: Turbojet aircraft only.

NOTE: DME/DME/IRU or GPS required.

NOTE: RNAV 1.

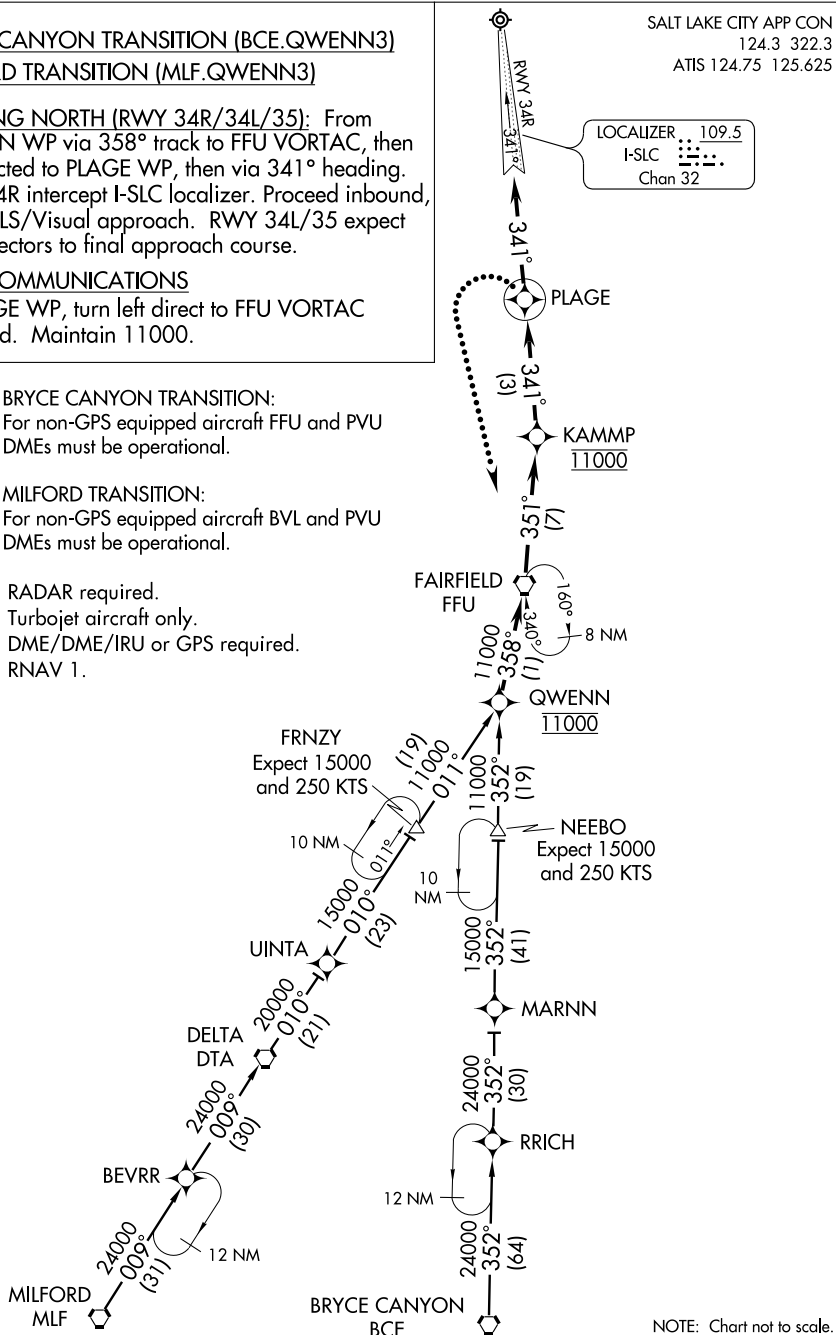

▼

▲ NA

For inoperative ALSF, increase LNAV Cat E visibility to 2.
GPS or RNP-0.3 required. DME/DME RNP-0.3 NA.



ALSF-2

ⓘ


ⓘ

MISSED APPROACH: Climb to 10000 via 161° course to RULFO WP then via 164° course to FFU VORTAC and hold.

ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER				GND CON			
124.75	124.3	119.05	257.8	118.3	257.8	132.65	336.4	121.9	348.6
125.625	322.3	(Rwy 16L-34R)		(Rwys 14-32, 17-35)		(Rwy 16R-34L)		(Rwys 14-32, 17-35)	
								(Rwys 16L-34R, 16R-34L)	

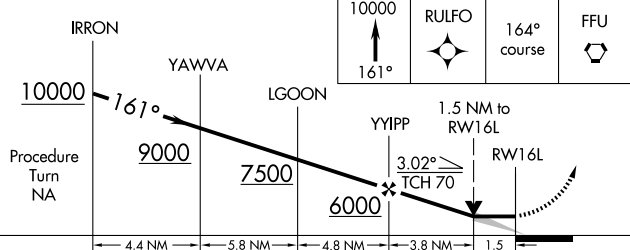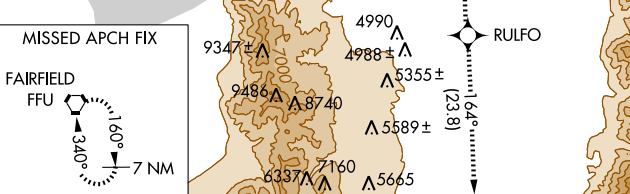

CATEGORY	A	B	C	D	E
LNAV MDA	4760/24	533 (600-½)	4760/50 533 (600-1)	4760/60 533 (600-1¼)	4760-1½ 533 (600-1½)

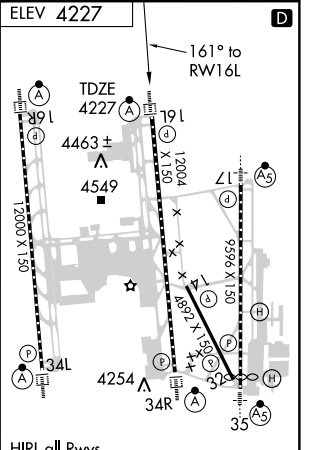




HIRL all Rwys
REIL Rwy 32
TDZ/CL Rwys 16L, 16R, 17, 35, 34L, and 34R




APP CRS 161°	Rwy Idg TDZE Apt Elev	12000 4223 4227
------------------------	-----------------------------	--

RNAV (GPS) RWY 16R

SALT LAKE CITY INTL (SLC)

  NA	GPS or RNP-0.3 required. DME/DME RNP-0.3 NA. For inoperative ALSF increase LNAV Cat E visibility to 1¾.	 ALSF-2	MISSED APPROACH: Climb to 10000 via 161° course to BAURT WP then 161° course to FFU VORTAC and hold.
---	---	---	--

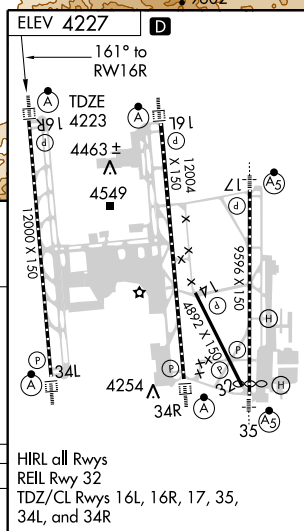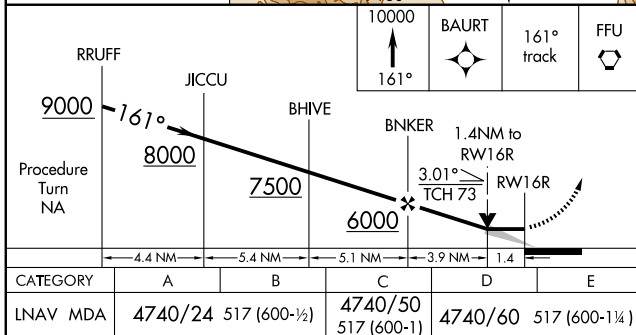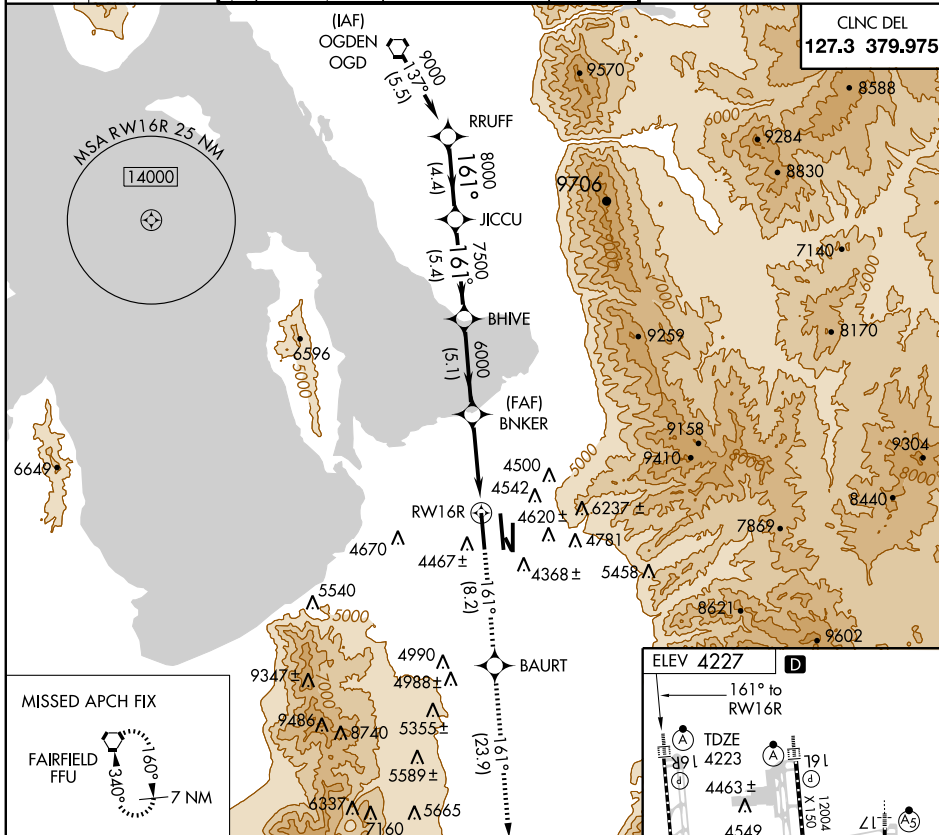

ATIS 124.75 125.625	SALT LAKE CITY APP CON 124.3 322.3	SALT LAKE CITY TOWER						GND CON			
		119.05 257.8 (Rwy 16L-34R)	118.3 257.8 (Rwys 14-32, 17-35)	132.65 336.4 (Rwy 16R-34L)				121.9 348.6 (Rwys 14-32, 17-35)		133.65 348.6 (Rwys 16L-34R, 16R-34L)	





APP CRS	Rwy Idg	9596
166°	TDZE	4219
	Apt Elev	4227

RNAV (GPS) RWY 17


SALT LAKE CITY INTL (SLC)

 For inoperative MALSR increase LNAV Cat E to 2. DME/DME RNP- 0.3 NA.	MALSR  (AS)	MISSED APPROACH: Climb to 10000 via 166° course to ZOMJE WP, then via 164° course to FFU VORTAC and hold.
---	---	---

ATIS 124.75 125.625	SALT LAKE CITY APP CON 124.3 322.3	SALT LAKE CITY TOWER 119.05 257.8 118.3 257.8 132.65 336.4 (Rwys 16L-34R) (Rwys 14-32, 17-35) (Rwy 16R-34L)	GND CON 121.9 348.6 133.65 348.6 (Rwys 14-32, 17-35) (Rwys 16L-34R, 16R-34L)
---	---	--	---

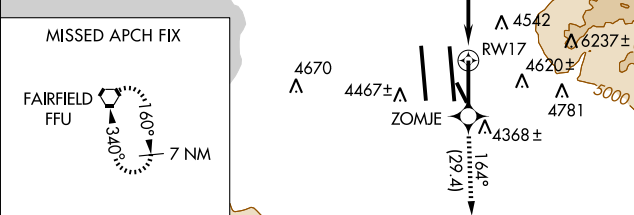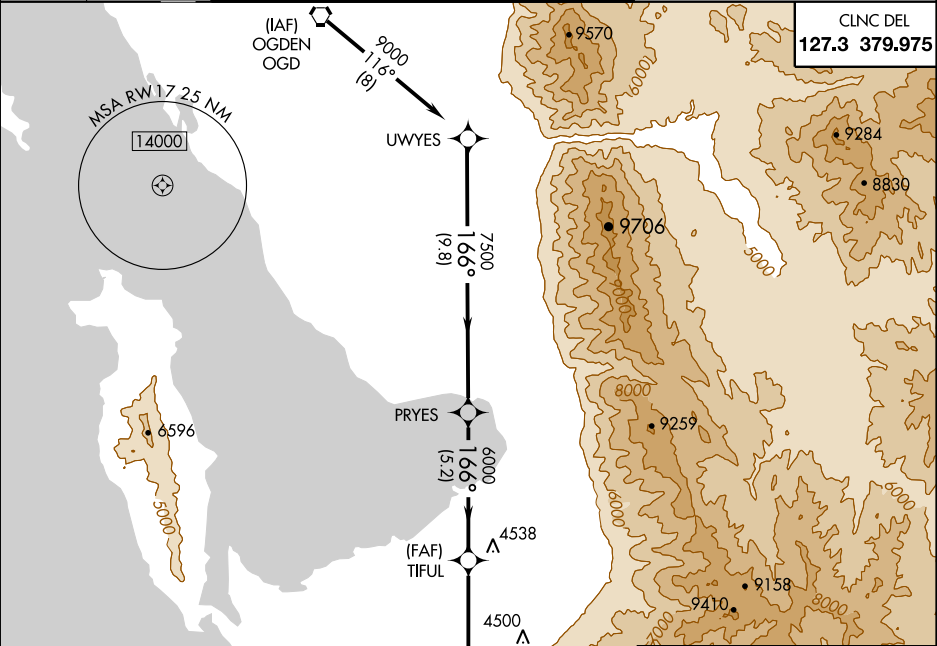

Procedure Turn NA	UWYES 9000	PRYES 7500	TIFUL 6000	ZOMJE 10000 166°	164° course	FFU 4219
	9.8 NM	5.2 NM	3.7 NM	1.6		
CATEGORY	A	B	C	D	E	
LNAV MDA	4800/24	581 (600-½)	4800/50 581 (600-1)	4800/60 581 (600-1¼)	4800-1½ 581 (600-1½)	

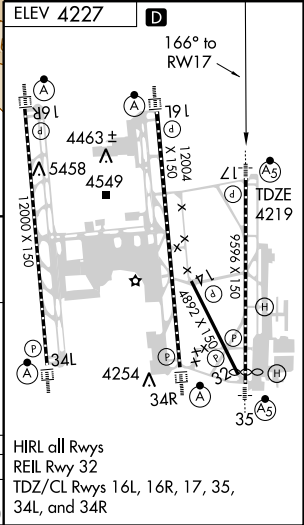

APP CRS	Rwy Idg	12000
341°	TDZE	4226
	Apt Elev	4227

RNAV (GPS) RWY 34L

SALT LAKE CITY INTL (SLC)


Baro-VNAV NA below -23°C (-9°F). GPS or RNP-0.3 required.
DME/DME RNP -0.3 NA. For inoperative MALSR increase
LNAV/VNAV Cat E visibility to 1½ and LNAV Cat E visibility to 1¼.

ALSF-2




MISSED APPROACH: Climb to 9000 via 341° course to LIEZA WP then via 336° course to OGD VORTAC and hold.


ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER				GND CON			
124.75	124.3	119.05	257.8	118.3	257.8	121.9	348.6	133.65	348.6
125.625	322.3	(Rwy 16L-34R)	(Rwys 14-32, 17-35)	(Rwy 16R-34L)		(Rwys 14-32, 17-35)	(Rwys 16L-34R, 16R-34L)		




CLNC DEL
127.3 379.975

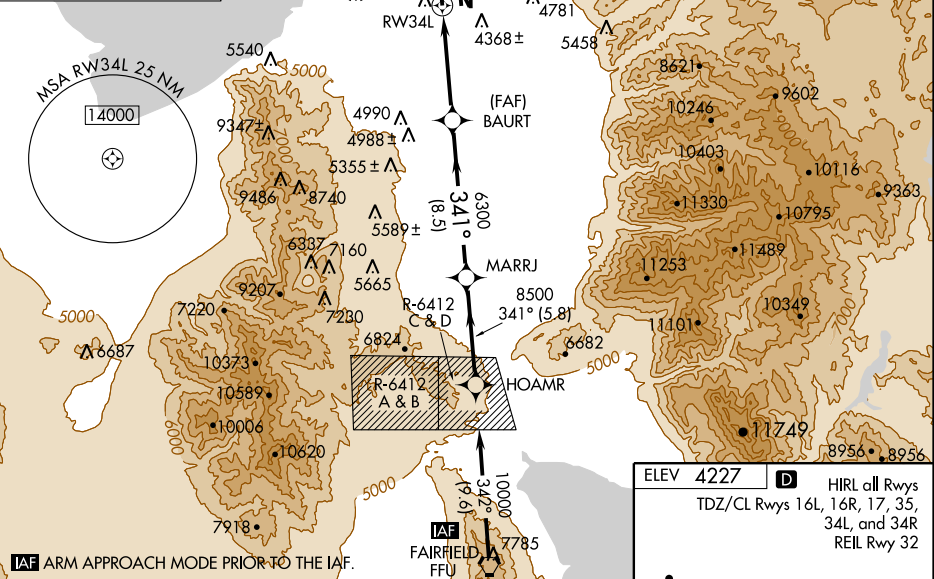

9000	LIEZA	336°	OGD	Procedure	HOAMR
341°		course		Turn NA	

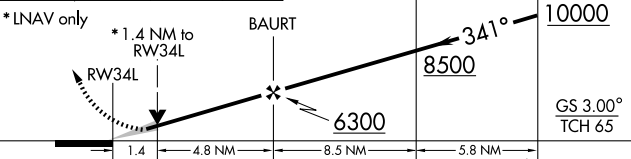

CATEGORY	A	B	C	D	E
GLS PA	DA		NA		
LNAV/VNAV	DA	4640/50	414 (500-1)		
LNAV MDA	4720/24	494 (500-½)	4720/40 494 (500-¾)	4720/50 494 (500-1)	4720/60 494 (500-1¼)
CIRCLING			NA		

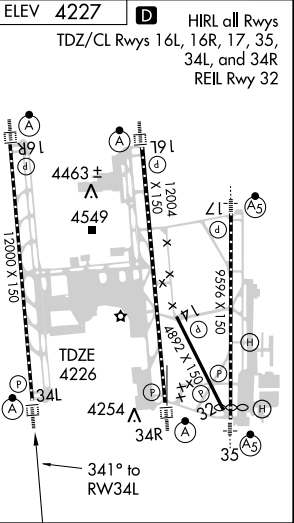

RNAV (GPS) RWY 34R

SALT LAKE CITY INTL (SLC)

APP CRS	Rwy Idg	12004
341°	TDZE	4222
	Apt Elev	4227


▼ DME/DME RNP-0.3 NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV
NA below -23°C (-9°F) or above 40°C (105°F).
For inoperative ALSF, increase Cat. E visibilities ½ mile.

ALSF-2

MISSED APPROACH: Climb to 9000 via
341° course to ZEYYU WP then 334°
course to OGD VORTAC and hold.

ATIS	SALT LAKE CITY	SALT LAKE CITY TOWER				GND CON	
124.75	APP CON	119.05	257.8	118.3	257.8	132.65	336.4
125.625	124.3 322.3	(Rwy 16L-34R)		(Rwys 14-32, 17-35)		(Rwys 14-32, 17-35)	
						121.9	348.6
						(Rwy 16L-34R, 16R-34L)	


MISSED APCH FIX

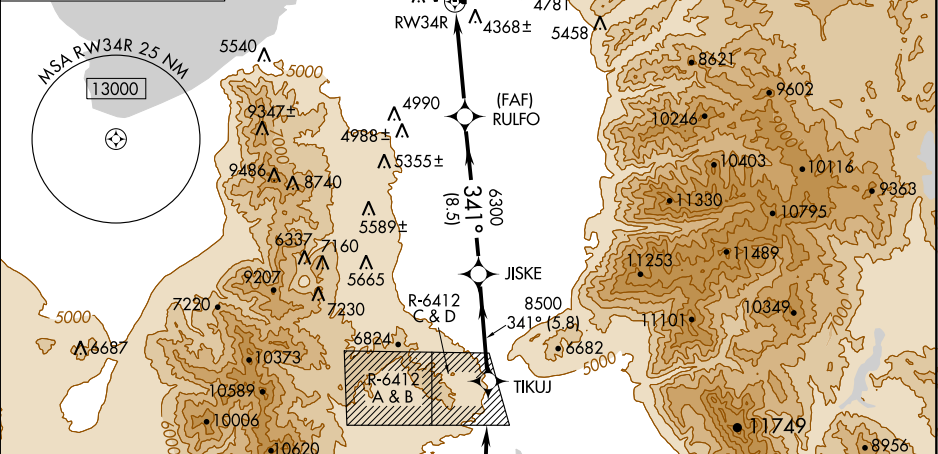

IAF ARM APPROACH MODE PRIOR TO THE IAF.

9000
↑
341°
ZEYYU
334°
course
OGD
Procedure
Turn
NA
TIKUJ
JISKE
10000
8500
6300
RW34R
1.3
4.9 NM
8.5 NM
5.8 NM
GS 3.00°
TCH 73

* LNAV only		RULFO				
* 1.3 NM to RW34R		341°				
CATEGORY		A	B	C	D	E
GLS	DA	NA				
LNAV/VNAV	DA	4734/60 512 (600-1¼)				
LNAV	MDA	4700/24	478 (500-½)	4700/40	4700/50	4700/60
				478 (500-¾)	478 (500-1)	478 (500-1¼)
CIRCLING		NA				

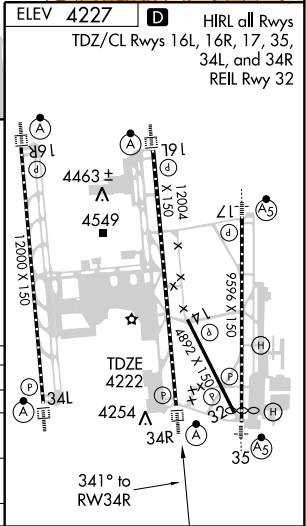

RNAV (GPS) RWY 35
SALT LAKE CITY INTL (SLC)

APP CRS	Rwy Idg	9272
343°	TDZE	4224
	Apt Elev	4227

Baro-VNAV NA below -23°C (-9°F).
GPS or RNP-0.3 required. DME/DME RNP-0.3 NA.
For inoperative MALSR, increase LNAV/VNAV Cat. E
visibility to 1½. Increase LNAV Cat. E visibility to 2.

MALSR

MISSED APPROACH: Climb to 9000 via
343° course to VUTAW WP then 332°
course to OGD VORTAC and hold.

ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER				GND CON	
124.75	124.3 322.3	119.05	257.8	118.3 257.8	132.65 336.4	121.9 348.6	133.65 348.6
125.625		(Rwy 16L-34R)		(Rwys 14-32, 17-35)	(Rwy 16R-34L)	(Rwys 14-32, 17-35)	(Rwys 16L-34R, 16R-34L)

MISSED APCH FIX

MSA RW35 25 NM

CLNC DEL

127.3 379.975



IAF ARM APPROACH MODE PRIOR TO THE IAF.

FAIRFIELD FFU

ELEV 4227

HIRL cll Rwy's

TDZ/CL Rwy's 16L, 16R, 17, 35, 34L, and 34R

REIL Rwy 32

9000

343°

VUTAW

332° course

OGD

Procedure Turn NA

OTUHY

LECSE

ATLEZ

10000

8500

6300

GS 3.00° TCH 74

*INAV only

*1.5 NM to RW35


1.5

4.7 NM


8.5 NM

5.8 NM

CATEGORY	DA	NA	C	D	E
GLS	DA	NA			
INAV/VNAV	DA	4680/50	456 (500-1)		
INAV	MDA	4780/24	556 (600-½)	4780/50	4780/60
				556 (600-1)	556 (600-1½)
CIRCLING		NA			

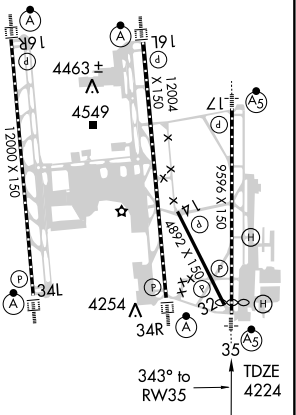

SALT LAKE ONE DEPARTURE

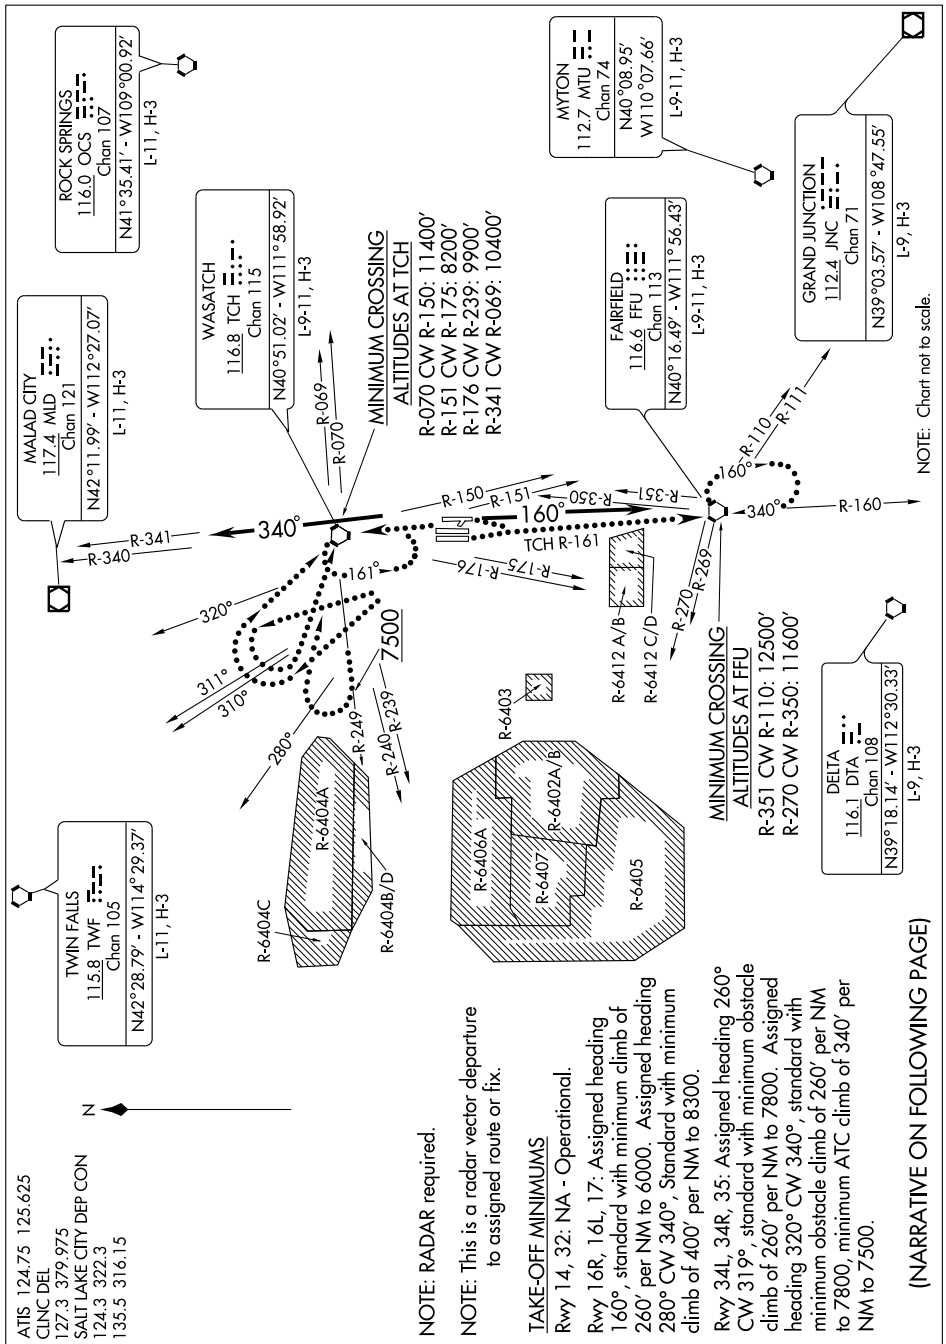

SALT LAKE ONE DEPARTURE

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 16L, 16R, 17: Climb heading 160° or as assigned, maintain 10000' or assigned lower altitude. Thence. . . .

TAKE-OFF RUNWAY 34L, 34R, 35: Climb heading 340° or as assigned, maintain 10000' or assigned lower altitude. Thence. . . .

. . . . expect vectors to assigned route or fix. Expect clearance to filed altitude 10 minutes after departure. Aircraft filed/assigned heading 331° CW 109° expect radar vectors eastbound leaving 11000' due to high terrain east of TCH VORTAC.

LOST COMMUNICATIONS: If not in contact with Departure Control 1 minute after take-off:

Runways 16L and 17: Assigned heading 160°, turn right, thence. . . .

Runway 16R: Assigned heading 160°, turn left, thence. . . .

. . . . climb to 11000' via TCH R-161 to FFU VORTAC. Aircraft departing FFU VORTAC R-111 CW R-269, climb on assigned route. All others continue climb in FFU VORTAC holding pattern (Hold south, right turns, 340° inbound) to cross FFU VORTAC at or above: R-351 CW R-110, 12500'; R-270 CW R-350, 11600'.

Runway 16L, 16R, 17: Assigned heading 280° CW 340°, fly assigned heading to 11000'. Then, aircraft heading 280° CW through 310°, execute a climbing right turn thence. . . aircraft heading 311° CW 340° execute a climbing left turn, thence. . . . proceed direct TCH VORTAC. Cross TCH VORTAC at or above 11400' and proceed on course.

Runway 34L, 34R, 35: Climb direct TCH VORTAC. Aircraft departing TCH VORTAC R-240 CW R-340, climb on course. All others, continue climb via TCH R-249 to 7500', then climbing right turn direct TCH VORTAC. Continue climb in TCH VORTAC holding pattern (Hold south, left turns, 341° inbound) to cross TCH VORTAC at or above: R-070 CW R-150, 11400'; R-151 CW R-175, 8200'; R-176 CW R-239, 9900'; R-341 CW R-069, 10400'. Climb on course.

TAKE-OFF OBSTACLE NOTES


Rwy 16L: Vehicle 124' from DER, 14' right of centerline, 15' AGL/4239' MSL.
Light pole 988' from DER, 726' right of centerline, 34' AGL/4254' MSL.
Pole 1024' from DER, 689' right of centerline, 34' AGL/4254' MSL.

Rwy 17: Vehicles beginning 335' from DER, on centerline, up to 17' AGL/4241' MSL.

Rwy 34R: Post 13' from DER, 349' right of centerline, 3' AGL/4227' MSL.

Rwy 35: Post 56' from DER, 249' left of centerline, 2' AGL/4220' MSL.

SEVYR ONE DEPARTURE

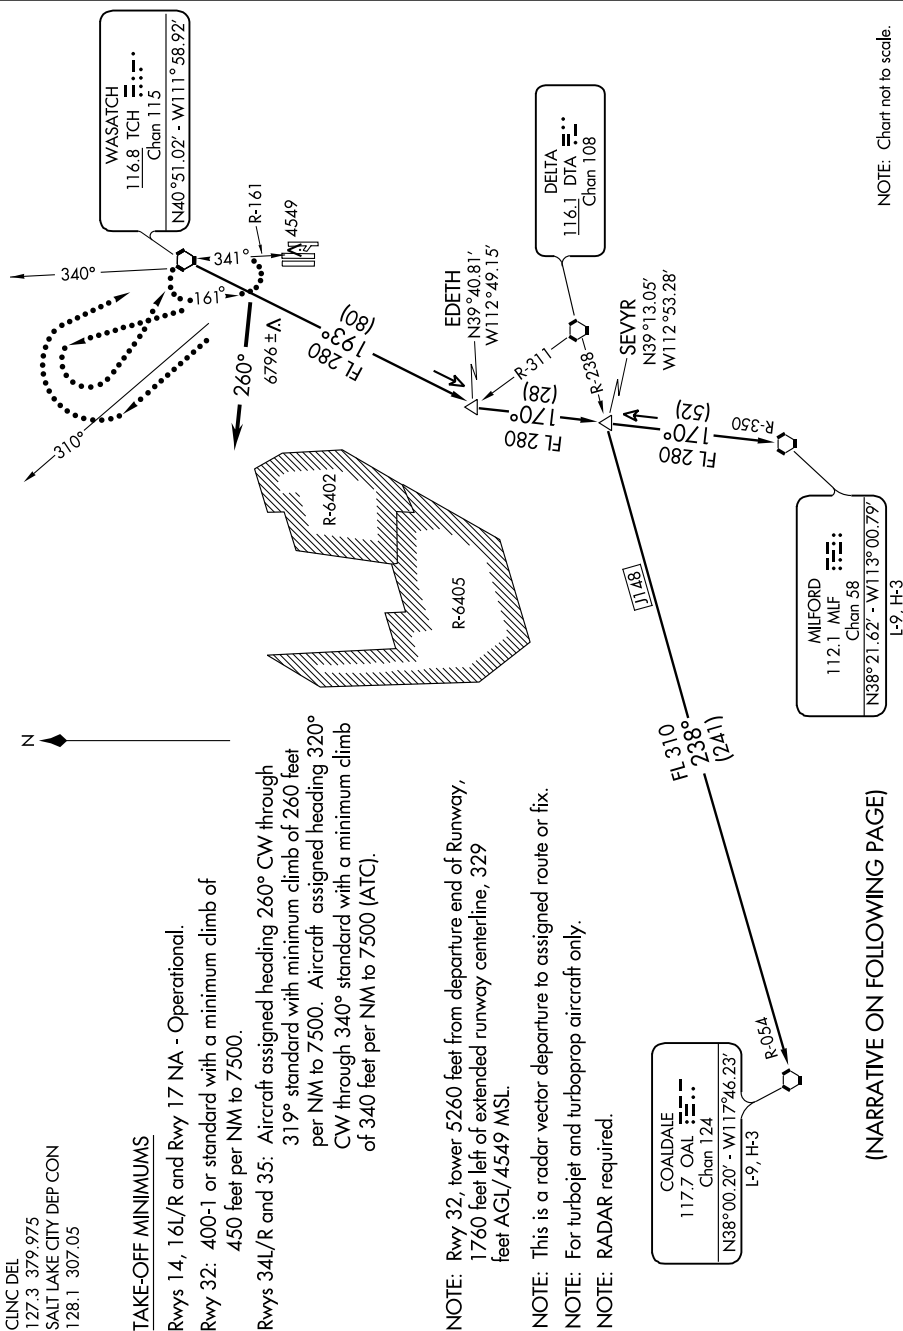

SEVYR ONE DEPARTURE



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAYS 32, 34L/R, and 35: Fly heading 260° or as assigned for radar vectors to assigned route or fix. Maintain 10,000 or assigned lower altitude. Expect clearance to filed altitude 10 minutes after departure.

LOST COMMUNICATIONS: If not in contact with departure control within 1 minute after takeoff, fly assigned heading to 11,000. Then, aircraft assigned heading 310° CW through 340°, execute a climbing left turn, all others execute a climbing right turn to TCH VORTAC. Continue climb in the TCH VORTAC holding pattern (hold south, left turns, 341° inbound) to cross TCH VORTAC at or above 11,500. Proceed on course.

COALDALE TRANSITION (SEVYR1.OAL): From over TCH VORTAC via TCH R-193 and MLF R-350 to SEVYR INT, then via DTA R-238 and OAL R-054 to OAL VORTAC.


MILFORD TRANSITION (SEVYR1.MLF): From over TCH VORTAC via TCH R-193 and MLF R-350 to MLF VORTAC.

SKES THREE ARRIVAL (RNAV)

ST-365 (FAA)

SALT LAKE CITY INTL
SALT LAKE CITY, UTAH

SALT LAKE CITY APP CON
124.9 290.3
ATIS 124.75 125.625

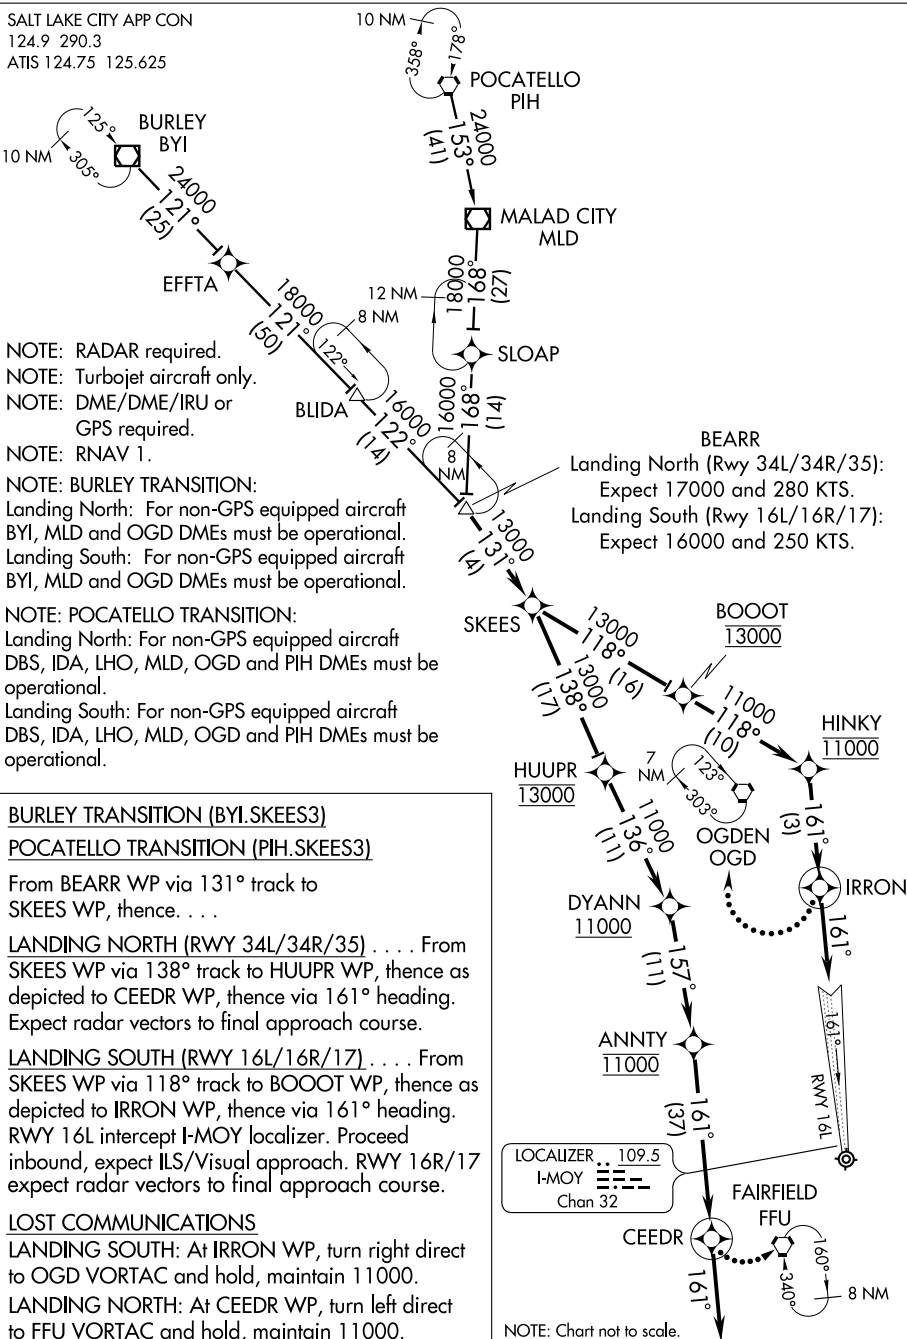

SPANES FIVE ARRIVAL

ST-365 (FAA)

SALT LAKE CITY INTL
SALT LAKE CITY, UTAH


HELPR TRANSITION (HELPR.SPANE5): From over HELPR INT via FFU R-100 to SPANE INT. Thence....
MEEKER TRANSITION (EKR.SPANE5): From over EKR VOR/DME via EKR R-258 to RACER, then via EKR R-258 and MTU R-078 to MTU VORTAC, then via MTU R-255 to SPANE INT. Thence....

....From over SPANE:

LANDING NORTH: via FFU R-100 to BOAGY INT. Expect ILS Rwy 34R approach.

LANDING SOUTH: via FFU R-100 to FFU VORTAC, then via FFU R-314 to DRYVE INT, then via OGD R-163 to CHHIP INT. After CHHIP INT, fly heading 340° for vectors ILS or Visual Rwy 16R approach.

LOST COMMUNICATIONS: LANDING SOUTH: In the event of lost communications, at CHHIP INT proceed direct OGD VORTAC. Maintain 12000 until OGD VORTAC.

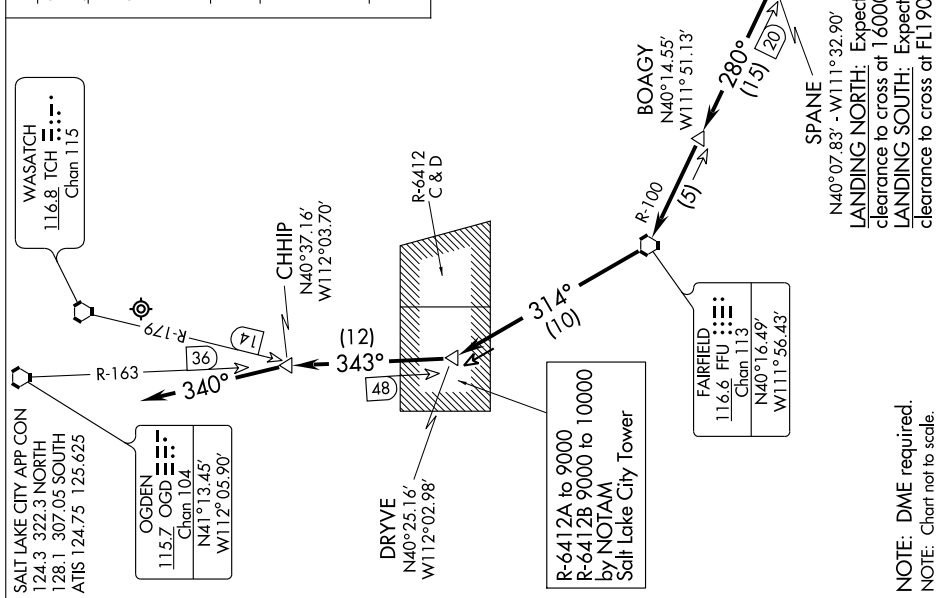

TWIN FALLS ONE DEPARTURE (RNAV)

TAKE-OFF OBSTACLES

Rwy 16L: Multiple light poles beginning 988' from DER, 689' right of centerline, up to 34' AGL/4254' MSL.
 Rwy 17: Vehicle on road 434' from DER, 518' right of centerline, 17' AGL/4237' MSL.
 Rwy 34R: Post 12' from DER, 349' right of centerline, 4' AGL/4227' MSL.
 Rwy 35: Post 55' from DER, 249' left of centerline, 4' AGL/4220' MSL.

ATIS 124.75 125.625
 CLNC DEL 127.3 379.975
 GND CON 121.9 348.6 (Rwys 14-32, 17-35)
 133.65 348.6 (Rwys 16L-34R, 16R-34L)
 SALT LAKE CITY TOWER 119.05 257.8 (Rwy 16L-34R)
 118.3 257.8 (Rwys 14-32, 17-35)
 132.65 336.4 (Rwy 16R-34L)
 SALT LAKE CITY DEP CON 126.25 387.0

TWIN FALLS
TWF

SCOV

MOFER

FL 230 250 KIAS

Resume normal speed
after MOFER.CGULL
15000BOYNT
13000CZAAR
11000JIORE
11000SHOLZ
10000 230 KIASWAZER
10000 230 KIAS

PPIGG

TAKE-OFF MINIMUMS

Rwys 14, 32, NA- ATC.

Rwy 16R: Standard with minimum climb of 413' per NM to 8300. ATC climb of 287' per NM to 15000.

Rwy 16L: Standard with minimum climb of 381' per NM to 8300. ATC climb of 285' per NM to 15000.

Rwy 17: Standard with minimum climb of 367' per NM to 7800. ATC climb of 292' per NM to 15000.

Rwy 34R: Standard with minimum climb of 238' per NM to 7700. ATC climb of 365' per NM to 15000.

Rwy 34L: Standard with minimum climb of 253' per NM to 7700. ATC climb of 365' per NM to 15000.

Rwy 35: Standard with a minimum climb of 226' per NM to 7700. ATC climb of 365' per NM to 15000.

NOTE: DME/DME/IRU or GPS required.

NOTE: RADAR required.

NOTE: RNAV 1.

NOTE: Turbojet aircraft only.

NOTE: For Non-GPS equipped aircraft: OGD and TCH DMEs must be operational.

NOTE: If unable to accept ATC climb rates and crossing restrictions, advise ATC on initial contact.

SW-4, 17 DEC 2009 to 14 JAN 2010

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

TWIN FALLS ONE DEPARTURE (RNAV)



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 16R/16L: Climb heading 161° to 4727, then right turn direct PPIGG, then via depicted route to TWF VORTAC, thence. . . .

TAKE-OFF RUNWAY 17: Climb heading 166° to 4727, then right turn direct PPIGG, then via depicted route to TWF VORTAC, thence. . . .

TAKE-OFF RUNWAY 34R: Climb heading 341° to 4727, then left turn direct SHOLZ, then via depicted route to TWF VORTAC, thence. . . .

TAKE-OFF RUNWAY 34L: Climb heading 341° to 4727, then left turn direct SHOLZ, then via depicted route to TWF VORTAC, thence. . . .

TAKE OFF RUNWAY 35: Climb heading 346° to 4727, then left turn direct SHOLZ, then via depicted route to TWF VORTAC, thence. . . .

...maintain FL230 or lower filed altitude. Expect filed altitude 10 minutes after departure.

VORTAC TCH 116.8 Chan 115	APP CRS 159°	Rwy Idg 12004 TDZE 4227 Apt Elev 4227
---	------------------------	--

VOR/DME or TACAN RWY 16L


SALT LAKE CITY INTL (SLC)

T For inoperative ALSF, increase S-16L Cat. E visibility to 1¾.

ALSF-2

MISSED APPROACH: Climb to 10000 direct FFU VORTAC and hold. (TACAN equipped aircraft continue via FFU R-160 to ZABUM/FFU 6 DME and hold south, right turn, 340° inbound.)

ATIS 124.75 125.625	SALT LAKE CITY APP CON 124.3 322.3	SALT LAKE CITY TOWER 119.05 257.8 118.3 257.8 132.65 336.4 (Rwy 16L-34R) (Rwys 14-32, 17-35) (Rwy 16R-34L)			GND CON 121.9 348.6 133.65 348.6 (Rwys 14-32, 17-35) (Rwys 16L-34R, 16R-34L)		
---	--	---	--	--	--	--	--

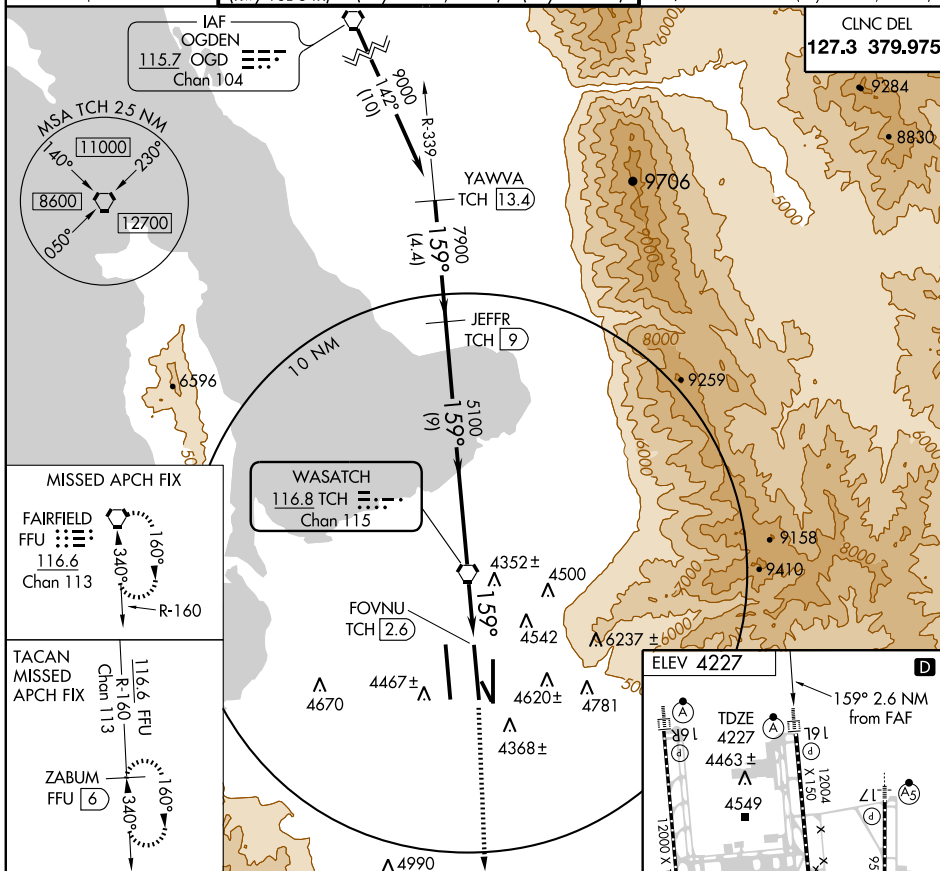

YAWVA TCH 13.4
JEFR TCH 9
VORTAC
TCH 70
FOVNU TCH 2.6

9000
7900
5100
4720

Procedure Turn NA

4.4 NM
9 NM
1.3 NM
1.3 NM

159°
2.94°
TCH 1.3
TCH 2.6

10000
FFU 116.6

CATEGORY	A	B	C	D	E
S-16L	4720/24	493 (500-½)	4720/40 493 (500-¾)	4720/50 493 (500-1)	4720/60 493 (500-1¼)
CIRCLING	NA				

HIRL all Rwy's
REIL Rwy 32
TDZ/CL Rwy's 16L, 16R, 17, 35,
34L, and 34R

VORTAC TCH	APP CRS	Rwy Idg	9596
116.8	148°	TDZE	4219
Chan 115		Apt Elev	4227

VOR/DME or TACAN RWY 17


SALT LAKE CITY INTL (SLC)

Inoperative table does not apply.


MALSR

MISSED APPROACH: Climb to 10000 direct FFU VORTAC and hold. (TACAN equipped aircraft continue via FFU R-160 to ZABUM/FFU 6 DME and hold south, right turn, 340° inbound.)

ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON
124.75			
125.625	124.3 322.3	119.05 257.8 (Rwys 16L-34R) 118.3 257.8 (Rwys 14-32, 17-35) 132.65 336.4 (Rwys 16R-34L)	121.9 348.6 (Rwys 14-32, 17-35) 133.65 348.6 (Rwys 16L-34R, 16R-34L)

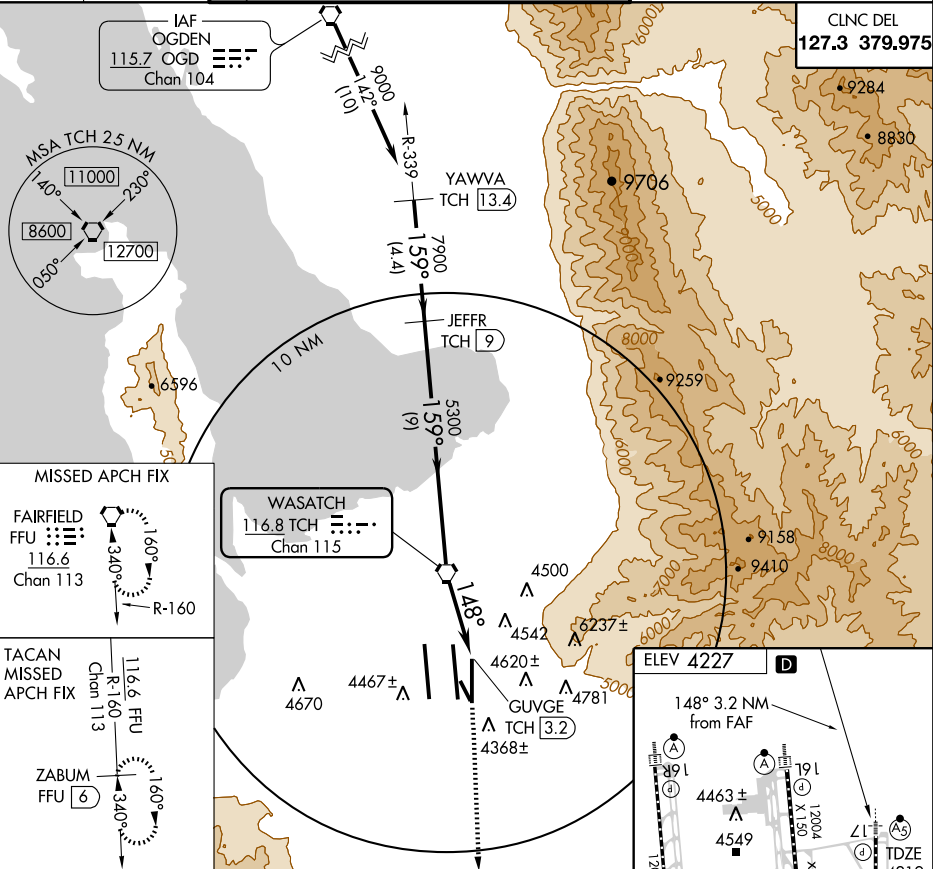

YAWVA TCH 13.4	JEFFR TCH 9	VORTAC	TCH 1.6	GUUGE TCH 3.2	FFU 116.6
9000	7900	5300	10000		
Procedure Turn NA					
4.4 NM	9 NM	1.6 NM	1.6 NM		
CATEGORY	A	B	C	D	E
S-17	4800/50	581 (600-1)	4800-1½ 581 (600-1½)	4800-1¾ 581 (600-1¾)	4800-2 581 (600-2)
CIRCLING			NA		

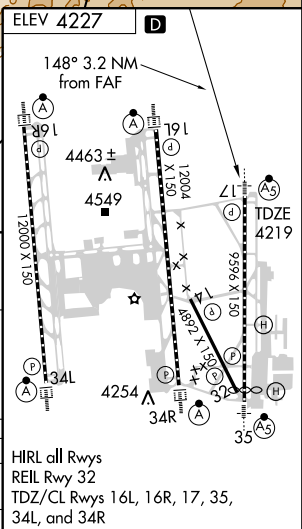






HIREL all Rwys
REIL Rwy 32
TDZ/CL Rwys 16L, 16R, 17, 35, 34L, and 34R


VORTAC TCH <u>116.8</u> Chan 115	APP CRS 339°	Rwy Idg 12004 TDZE 4222 Apt Elev 4227
---	------------------------	--

VOR/DME RWY 34R

SALT LAKE CITY INTL (SLC)

				MISSED APPROACH: Climb to 5300 then climb to 10700 via heading 300° and TCH VORTAC R-249 to STACO INT/20 DME and hold, continue climb-in-hold to 10700.	
ATIS 124.75 125.625	SALT LAKE CITY APP CON 124.3 322.3	SALT LAKE CITY TOWER 119.05 257.8 118.3 257.8 132.65 336.4 (Rwys 16L-34R) (Rwys 14-32, 17-35) (Rwy 16R-34L)		GND CON 121.9 348.6 133.65 348.6 (Rwys 14-32, 17-35) (Rwys 16L-34R, 16R-34L)	

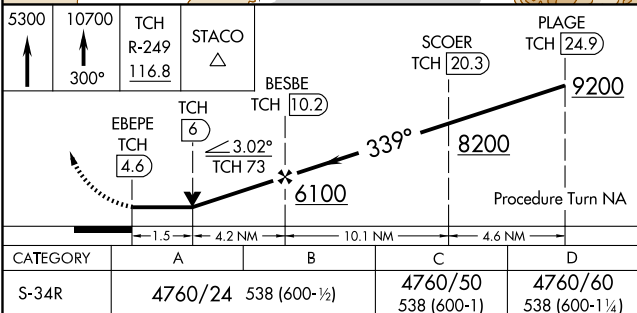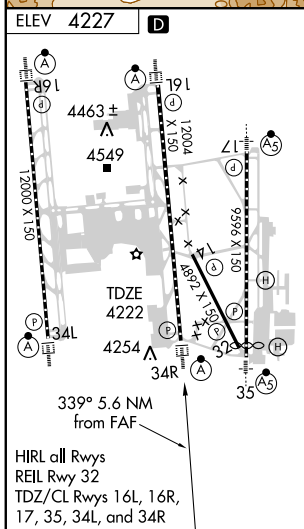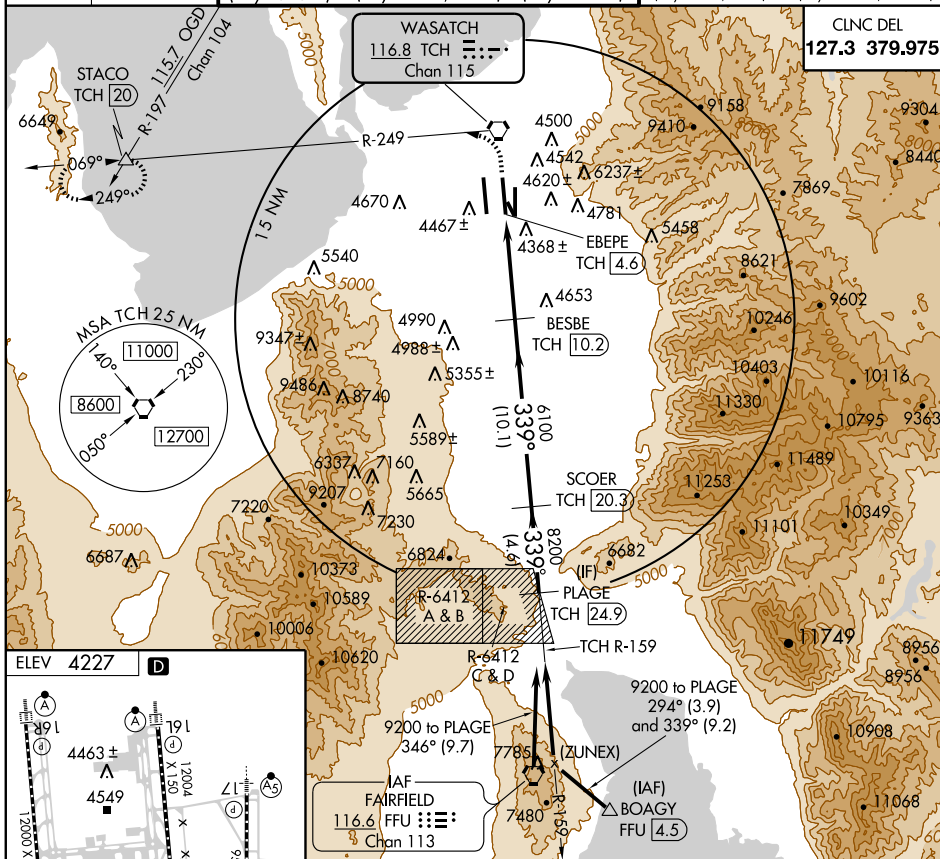

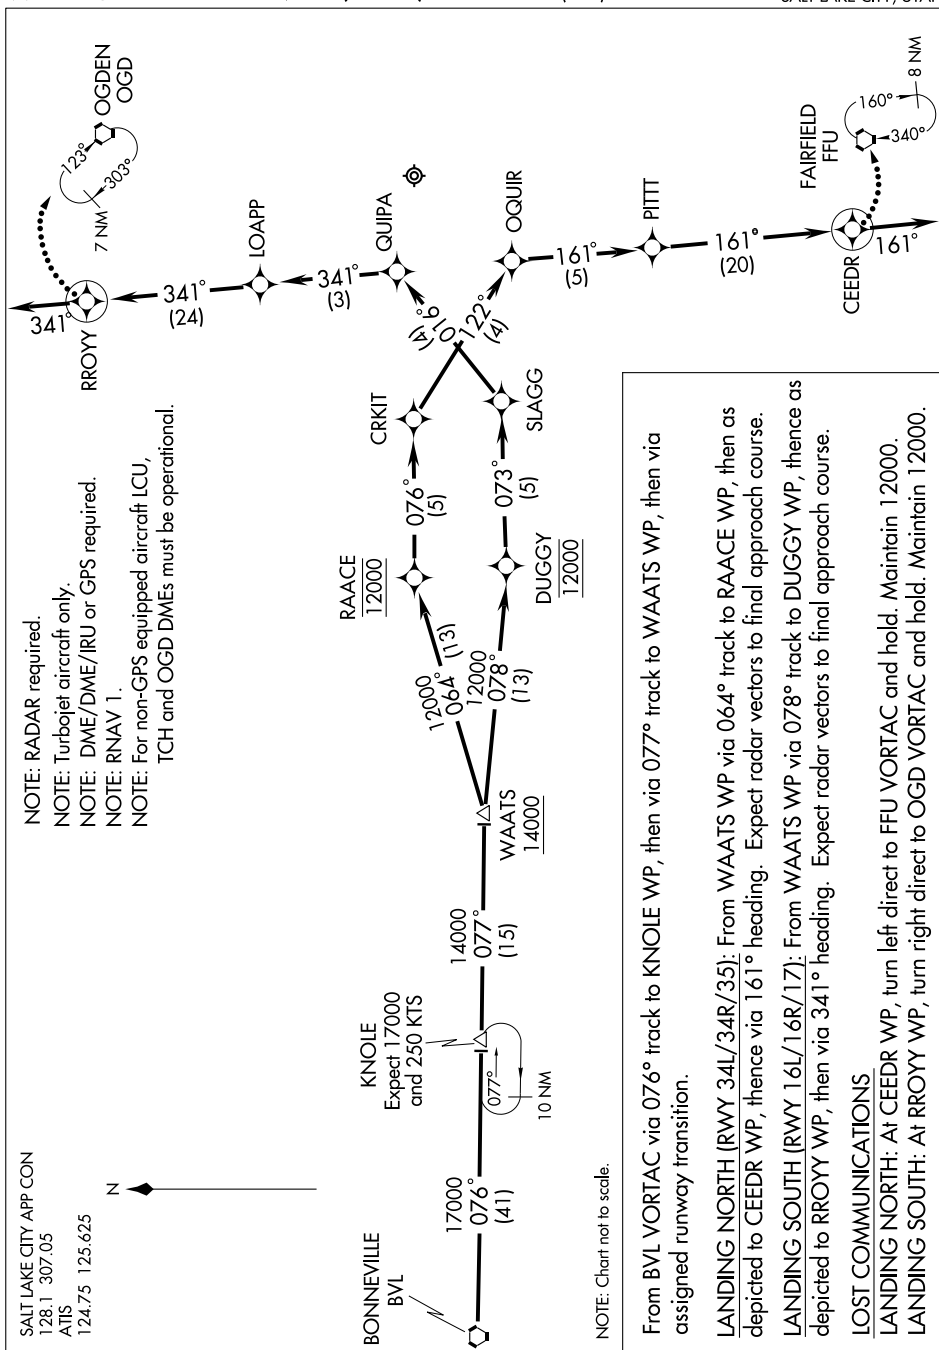

WEVIC ONE DEPARTURE (RNAV)



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 16R: Climb heading 161° to 4727, then left turn direct HOPTO, then via depicted route to WEVIC, thence. . . .

TAKE-OFF RUNWAY 16L: Climb heading 161° to 4727, then right turn direct HOPTO, then via depicted route to WEVIC, thence. . . .

TAKE-OFF RUNWAY 17: Climb heading 166° to 4727, then left turn direct HOPTO, then via depicted route to WEVIC, thence. . . .

. . . .via (transition) maintain 16000 or lower filed altitude. Expect filed altitude 10 minutes after departure.

BRYCE CANYON TRANSITION (WEVIC1.BCE)

BOULDER CITY TRANSITION (WEVIC1.BLD)

DELTA TRANSITION (WEVIC1.DTA)


HANKSVILLE TRANSITION (WEVIC1.HVE)

KSINO TRANSITION (WEVIC1.KSINO)

NORRA TRANSITION (WEVIC1.NORRA)

ITOF01 ONE DEPARTURE (RNAV)

SALT LAKE CITY DEP CON
120.2 124.3 322.3
CLNC DEL
127.0
UNICOM 122.7 (CTAF)
AWOS-3 134.425

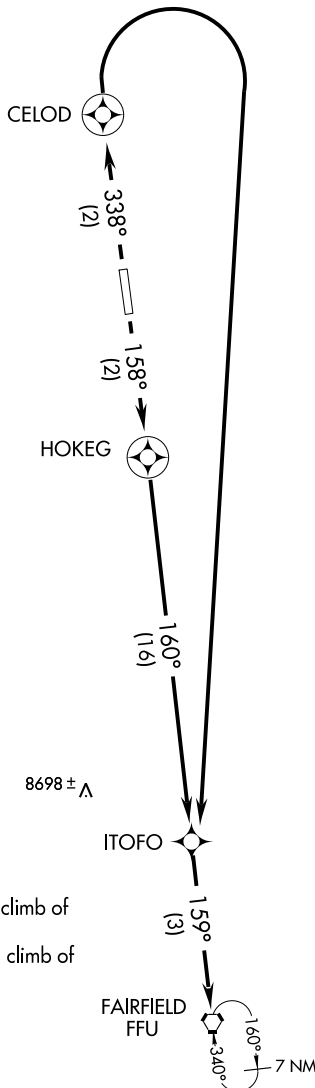

6818±

8698±

TAKE-OFF MINIMUMS

RWY 16: Standard with a minimum climb of
280' per NM to 7100.

RWY 34: Standard with a minimum climb of
495' per NM to 9000.

NOTE: 1. GPS Required.

2. RNAV 1

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 16: Climb to 9000 via 158° course to HOKEG WP, 160° course to ITOFO WP, and 159° course to FFU VORTAC and hold.


TAKE-OFF RUNWAY 34: Climb to 9000 via 338° course to CELOD WP, climbing right turn direct ITOFO WP, and 159° course to FFU VORTAC and hold.

All aircraft expect further clearance to filed altitude and route within ten minutes after departure.

APP CRS	Rwy Idg	5622
338°	TDZE	4606
	Apt Elev	4607

RNAV (GPS) Y RWY 34

SALT LAKE CITY / SOUTH VALLEY RGNL (U42)


	DME/DME RNP-0.3 NA. If local altimeter setting not received, use Salt Lake City Intl altimeter setting and increase all MDAs 80 feet. VDP NA when using Salt Lake City Intl altimeter setting.
---	--

MISSED APPROACH: Climb to 9000 direct
DUYDE and via 309° track to KITBE
and via 270° track to STACO and hold.



AWOS-3
134.425

SALT LAKE CITY APP CON
120.2 124.3 322.3

CLNC DEL
127.0

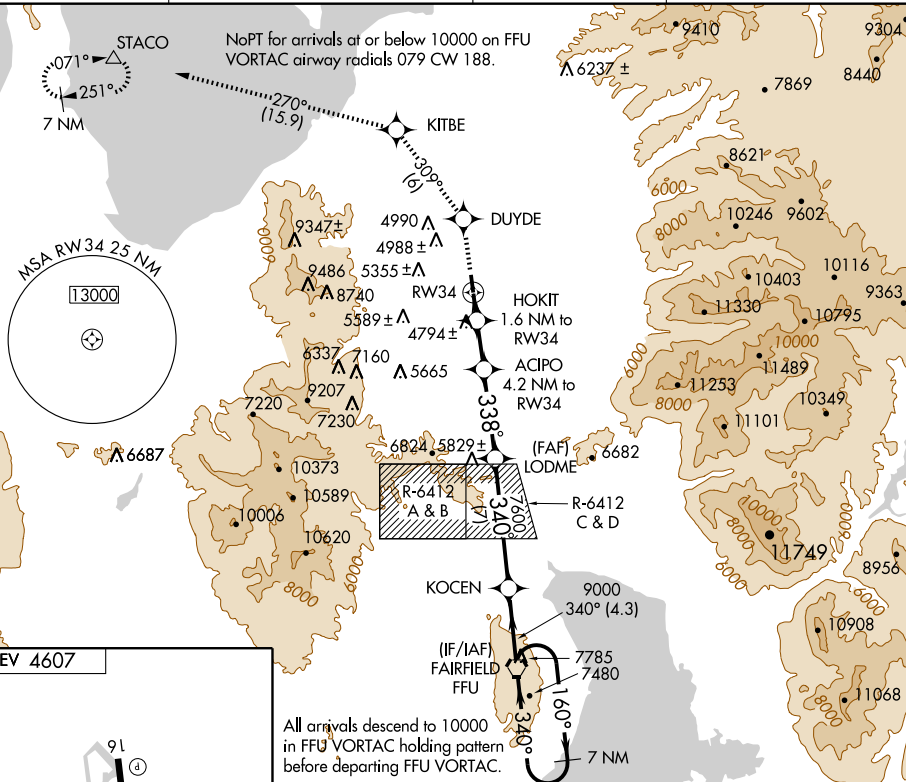UNICOM
122.7 (CTAF) **L**

All arrivals descend to 10000
in FFU VORTAC holding pattern
before departing FFU VORTAC.

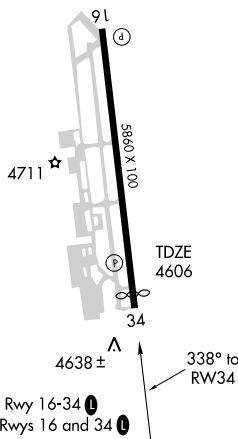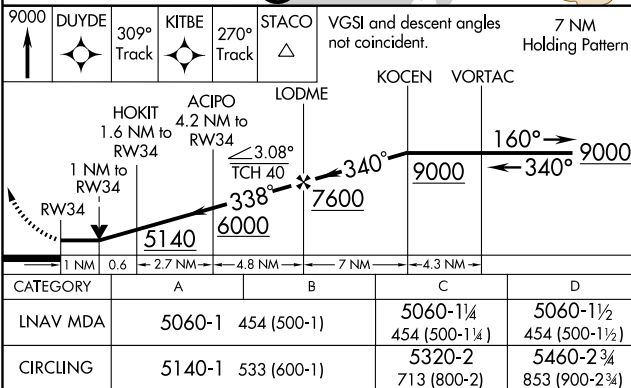

APP CRS 338°	Rwy Idg 5622 TDZE 4606 Apt Elev 4607
------------------------	---


RNAV (GPS) Z RWY 34

SALT LAKE CITY / SOUTH VALLEY RGNL (U42)


T	DME/DME RNP-0.3 NA.
A NA	If local altimeter setting not received, use Salt Lake City Intl altimeter setting and increase all MDAs 80 feet. VDP NA when using Salt Lake City Intl altimeter setting.

MISSED APPROACH: Climbing right turn to 9000 direct FFU VORTAC and hold.

AWOS-3 134.425	SALT LAKE CITY APP CON 120.2 124.3 322.3	CLNC DEL 127.0	UNICOM 122.7 (CTAF) 0
--------------------------	--	--------------------------	---------------------------------

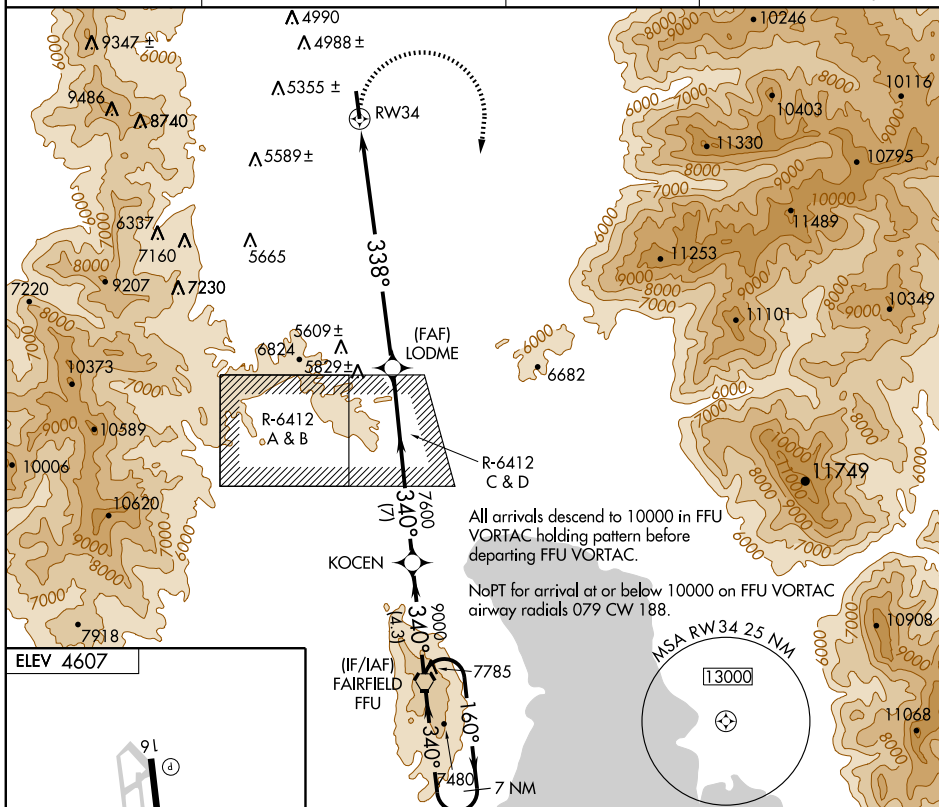


ELEV 4607

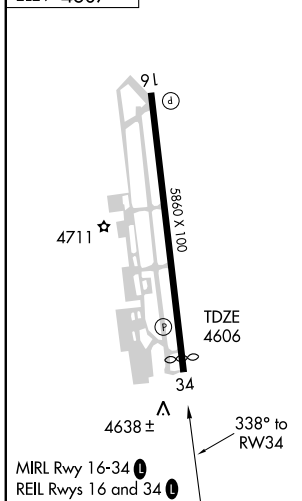


All arrivals descend to 10000 in FFU VORTAC holding pattern before departing FFU VORTAC.

NoPT for arrival at or below 10000 on FFU VORTAC
airway radials 079 CW 188.

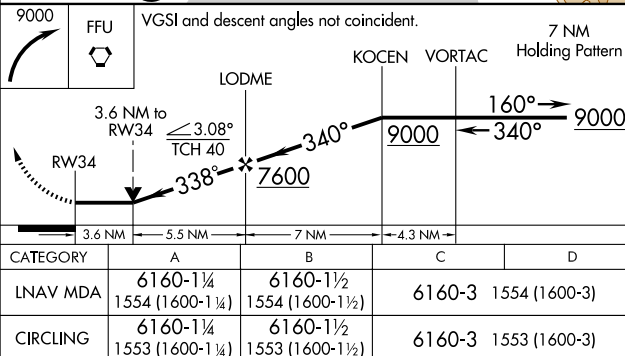

IYLAG ONE DEPARTURE (RNAV)

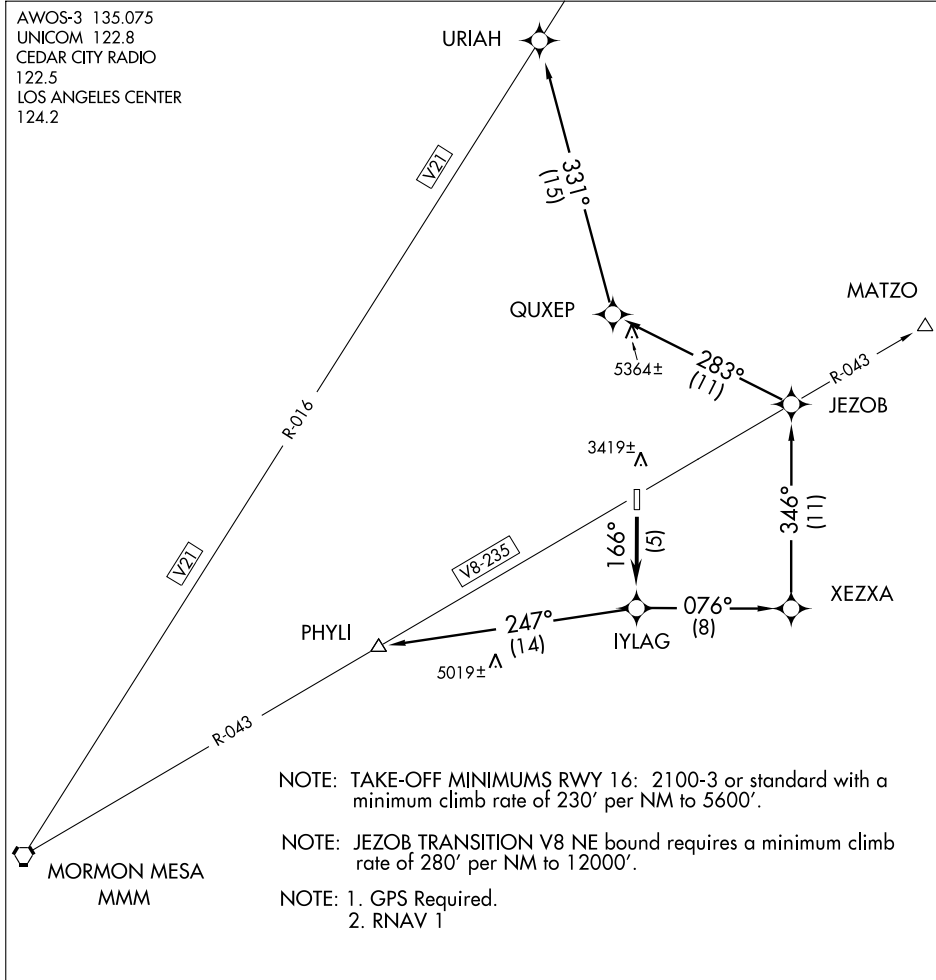

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 16: Climb to 12000 (or assigned altitude) via course 166° to IYLAG WP then via assigned transition/route.

TAKE-OFF RUNWAY 34: Not authorized.

JEZOB TRANSITION (IYLAG1.JEZOB): From over IYLAG WP via course 076° to XEZXA WP, then via course 346° to JEZOB WP.

PHYLI TRANSITION (IYLAG1.PHYLI)

URIAH TRANSITION (IYLAG1.URIAH)

WAAS CH 53501 W34A	APP CRS 346°	Rwy Idg 6606 TDZE 2906 Apt Elev 2941
--	------------------------	---

RNAV (GPS) RWY 34
ST. GEORGE MUNI (SGU)

ST. GEORGE MUNI (SGU)


DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 8600 direct HUGTA and via 069° track to ZUZCE and hold, continue climb-in-hold to 8600.

AWOS-3
135.075

CEDAR CITY RADIO
122.5

UNICOM
122.8 (CTAF) **L**

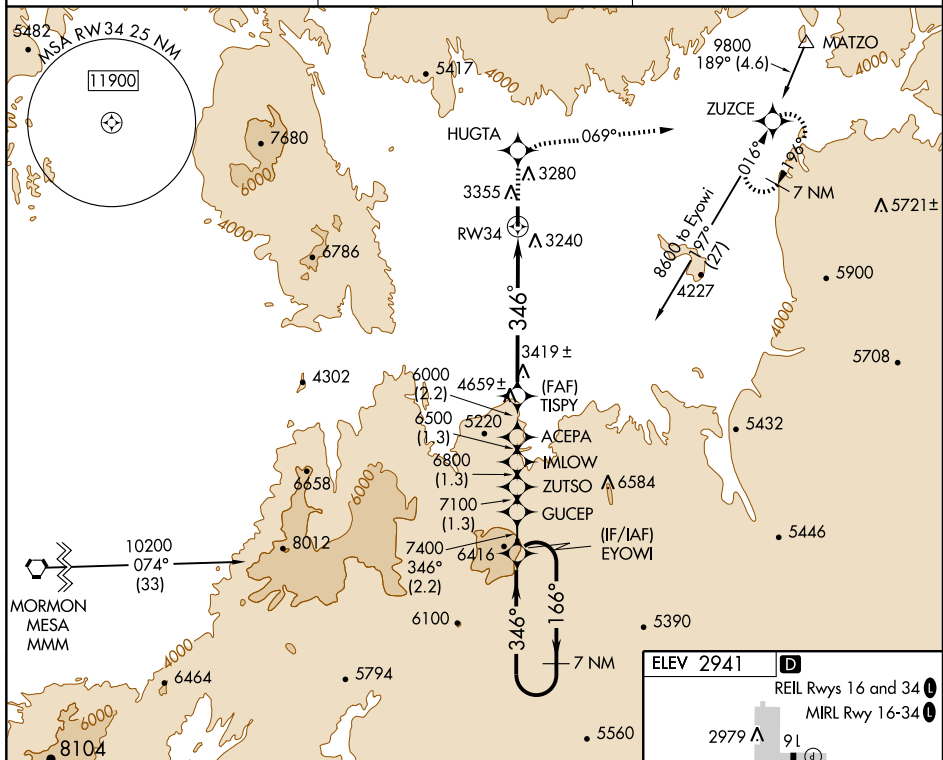

SW-4. 17 DEC 2009 to 14 JAN 2010

ELEV 2941	D
	REIL Rwys 16 and 34 L

REIL Rwy 16 and 34 **L**MIRL Rwy 16-34 **L**

2979 A 91

1. **Introduction**

1000

100



☆ 2963

100

C

— p —

600

TDZE (P)

34 |

346° to

RW34

--	--

AL-5742 (FAA)

VOR/DME OZN 109.8 Chan 35	APP CRS 296°	Rwy Idg TDZE Apt Elev	N/A N/A 2941
---	------------------------	-----------------------------	---

VOR-C
ST. GEORGE MUNI(SGU)




T
A

MISSED APPROACH: Climbing right turn to 7000 in OZN VOR/DME holding pattern.

AWOS-3
135.075

CEDAR CITY RADIO
122.5

UNICOM
122.8 (CTAF) **L**

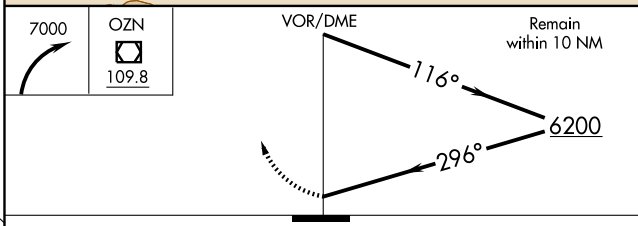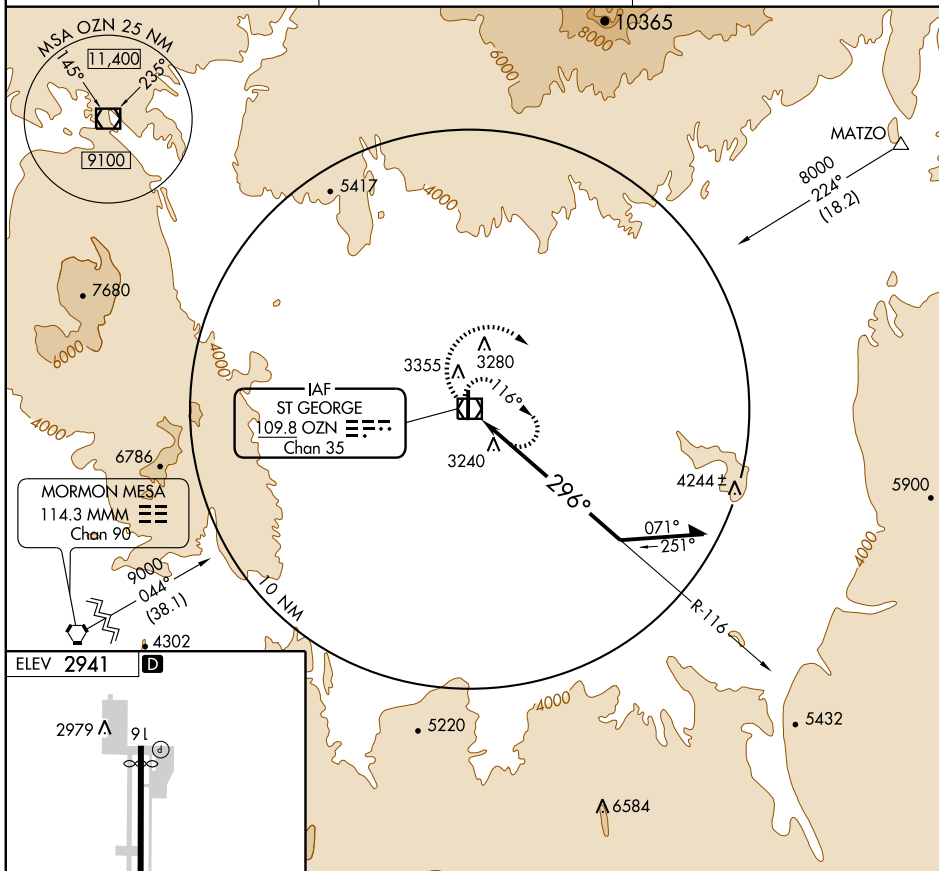REIL Rwy 16 and 34 **L**MIRL Rwy 16-34 **L**

CATEGORY	A	B	C	D
CIRCLING	4700-1¼ 1762 (1800-1¼)	4700-1½ 1762 (1800-1½)	4700-3	1762 (1800-3)

SW-4. 17 DEC 2009 to 14 JAN 2010

▼

▲

MISSED APPROACH: Climbing right turn to 8000 via OZN R-103 and OZN 16 DME Arc CW to MOKAC/16 DME and hold.

AWOS-3



135.075

CEDAR CITY RADIO


122.5

UNICOM

122.8 (CTAF) 0

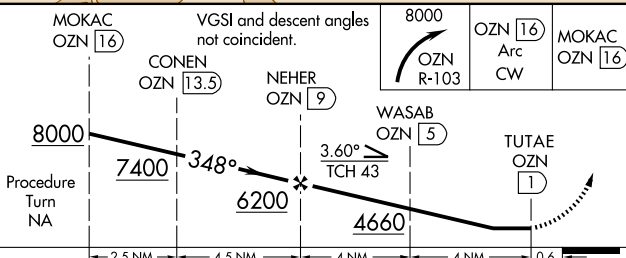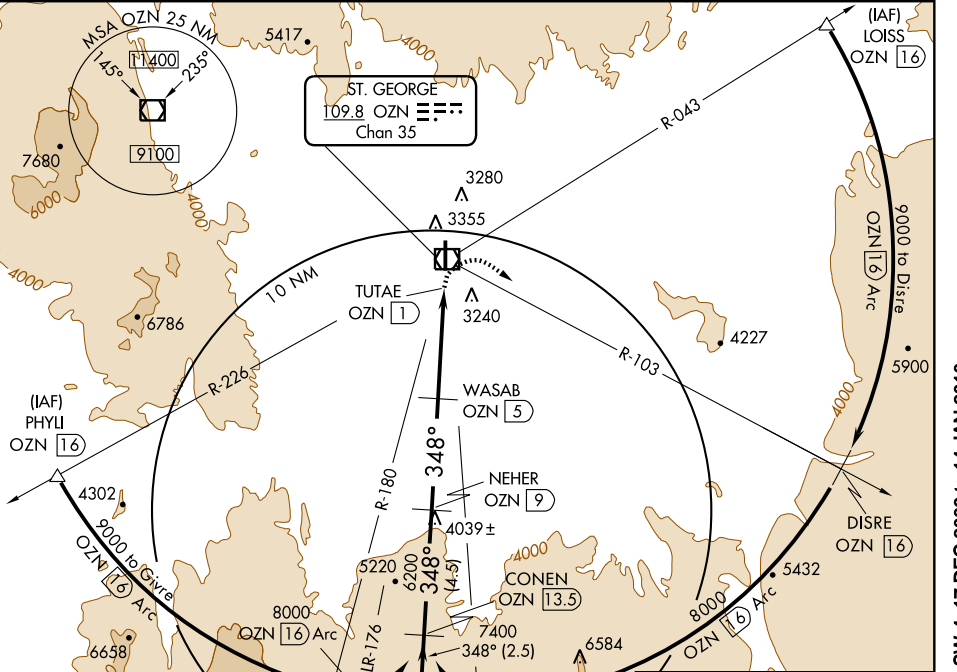

CATEGORY	A	B	C	D
S-34	3500-1	594 (600-1)	3500-1½ 594 (600-1½)	3500-1¾ 594 (600-1¾)
CIRCLING	3660-1 719 (800-1)	3720-1¼ 779 (800-1¼)	3720-2¼ 779 (800-2¼)	3900-3 959 (1000-3)


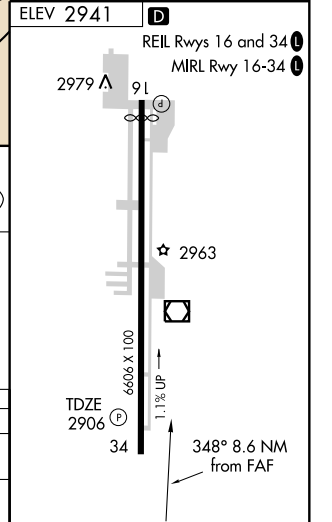


MISSED APPROACH: Climbing right turn to 7000 in OZN VOR/DME holding pattern.

AWOS-3
135.075

CEDAR CITY RADIO
122.5

UNICOM
122.8 (CTAF) 0

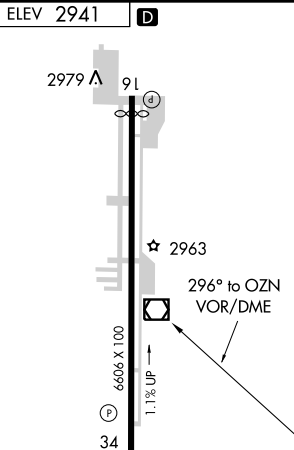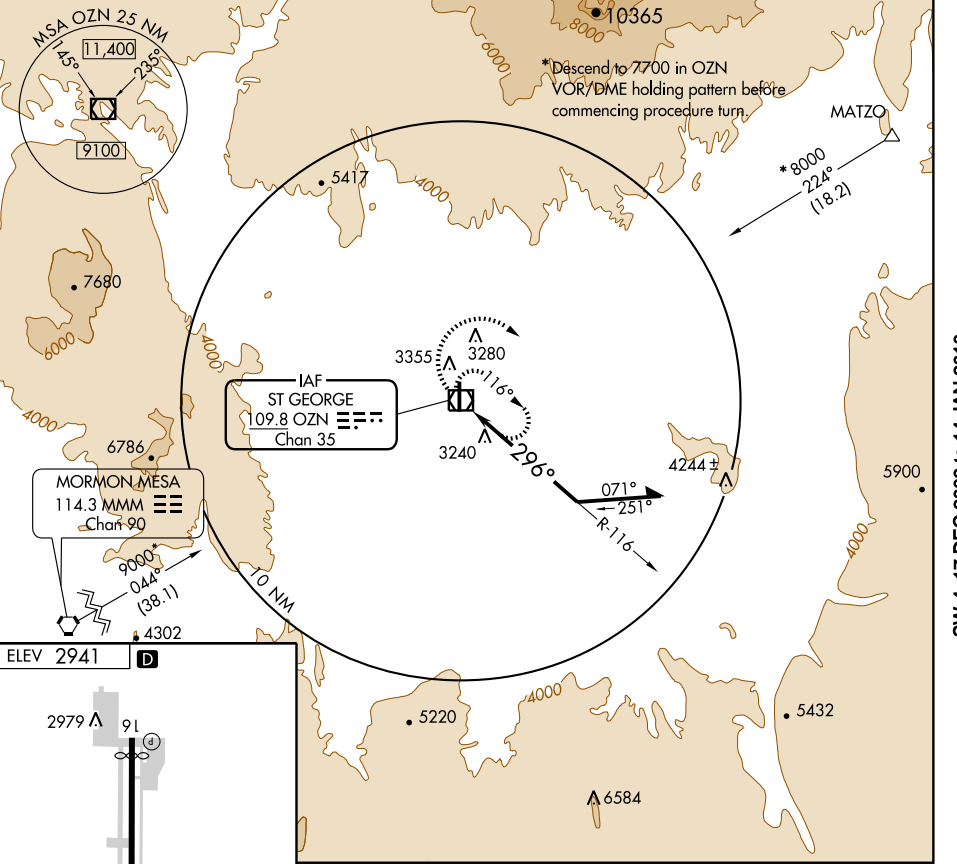


REIL Rwy 16 and 34				
MIRL Rwy 16-34				
CATEGORY	A	B	C	D
CIRCLING	4200-1¼ 1262 (1300-1¼)		NA	

SW-4. 17 DEC 2009 to 14 JAN 2010

YIWDA ONE DEPARTURE (RNAV)

AWOS-3 135.075
UNICOM 122.8
CEDAR CITY RADIO
122.5
LOS ANGELES CENTER
124.2

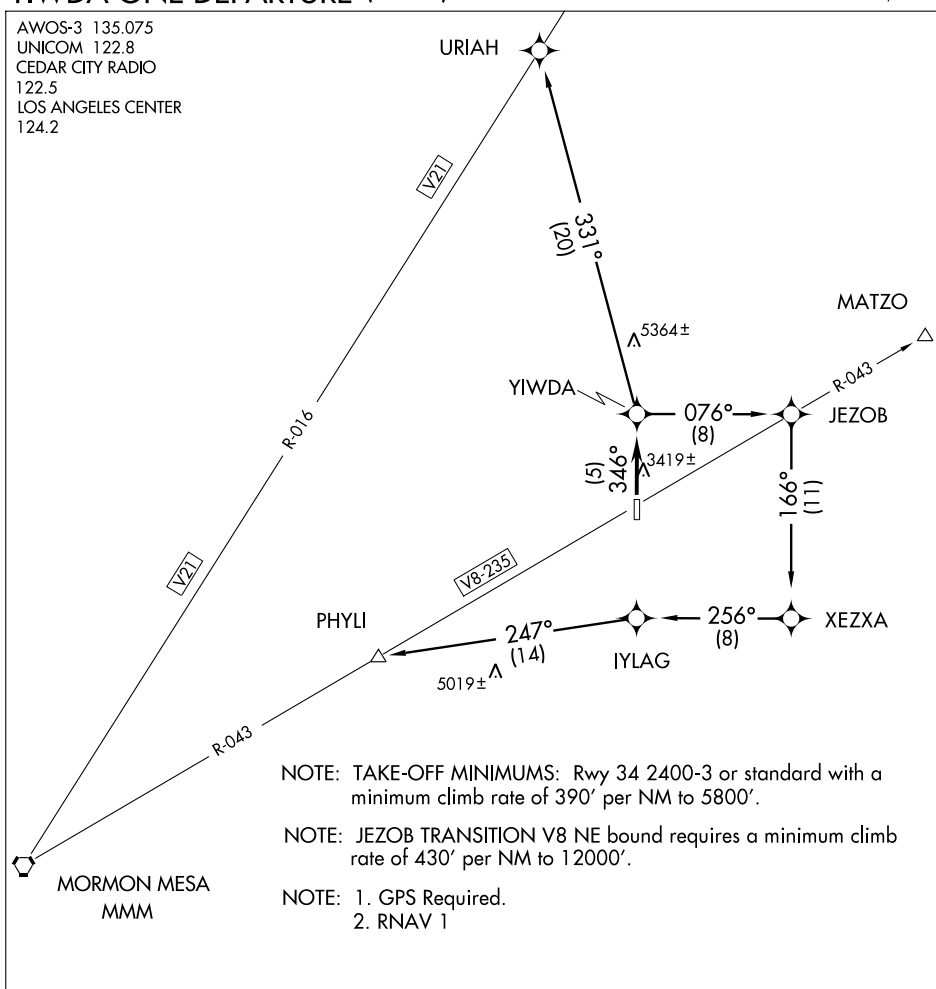

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 34: Climb to 12000 (or assigned altitude) via course 346° to YIWDA WP then via assigned transition/route.

TAKE-OFF RUNWAY 16: Not authorized.

JEZOB TRANSITION (YIWDA1.JEZOB): From over YIWDA WP via course 076° to JEZOB WP.

PHYLI TRANSITION (YIWDA1.PHYLI)

URIAH TRANSITION (YIWDA1.URIAH)

TOOELE, UTAH

AL-6944 (FAA)

LOC/DME I-TVY	APP CRS	Rwy Idg	6100
108.9	166°	TDZE	4297
Chan 26 (X)		Apt Elev	4322


ILS or LOC/DME RWY 17

TOOELE / BOLINDER FIELD-TOOELE VALLEY (TVY)


<p>▼ Inoperative table does not apply to S-ILS R17.</p> <p>▲ When local altimeter setting not received, use Salt Lake City Intl altimeter setting and increase all DA/MDA 60 feet and Circling Cat. D visibility ¼ mile. For inoperative MALSRR increase S-LOC Cats. A, B, and C visibility to 1 mile. For inoperative MALSRR when using Salt Lake City Intl altimeter setting, increase S-LOC 17 Cats. A and B visibility to 1 mile.</p>	<p>MALSRR</p>	<p>MISSED APPROACH: Climb to 5400 then climbing right turn to 9000 via heading 343° and OGD VORTAC R-192 to WEGET INT/ I-TVY 13.5 DME and hold, continue climb-in-hold to 9000.</p>
---	----------------------	--

AWOS-3 119.725	SALT LAKE CITY APP CON 135.5 316.15	CLNC DEL 124.4	UNICOM 123.0 (CTAF) 0
--------------------------	---	--------------------------	---------------------------------

Procedure turn required for arrivals at WEGET via V32 eastbound.

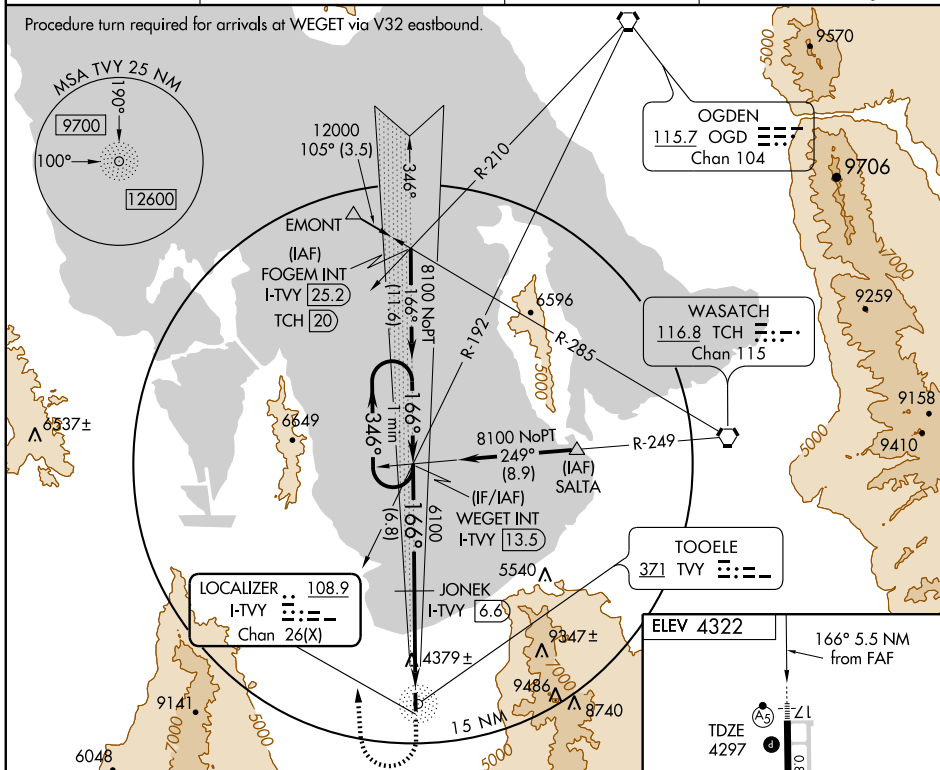

One Minute Holding Pattern	WEGET INT I-TVY 13.5	JONEK I-TVY 6.6	5400	9000	OGD R-192 115.7	WEGET INT I-TVY 13.5
8100	346°	166°	6100	6100	I-TVY 2.1	I-TVY 1.2
GS 3.00°						
TCH 55						
	6.8 NM	4.5 NM	1 NM			
CATEGORY	A	B	C	D		
S-ILS 17		4497-¾	200 (200-¾)			
S-LOC 17		4640-¾	343 (400-¾)			
CIRCLING	4820-1 498 (500-1)	4840-1 518 (600-1)	4860-1½ 538 (600-1½)	4940-2 618 (700-2)		

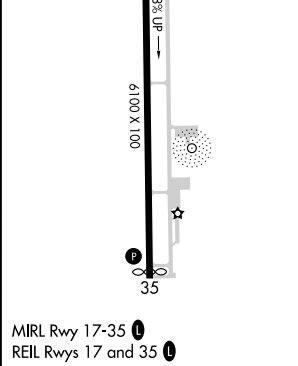

MIRL Rwy 17-35 0

REIL Rwy 17 and 35 0

NDB TVY 371	APP CRS 161°	Rwy Idg TDZE Apt Elev 6100 4294 4318
-----------------------	------------------------	--

NDB RWY 17

TOOELE / BOLINDER FIELD-TOOELE VALLEY (TVY)

NA Use Salt Lake City Intl altimeter setting.
Circling NA at night to Rwy 35.

MALSR

MISSED APPROACH: Climbing right turn to 9000 via the 341° bearing from TVY NDB to LAVRY Int and hold.




AWOS-3
119.725

SALT LAKE CITY APP CON
135.5 316.15

CLNC DEL
124.4

UNICOM
123.0 (CTAF) **0**

All aircraft descend to 8100 in LAVRY Int holding pattern before departing LAVRY Int.

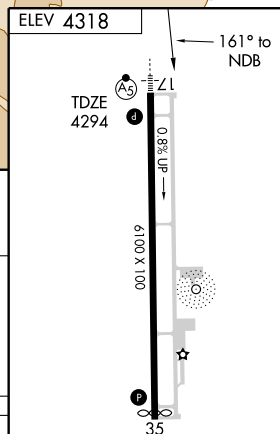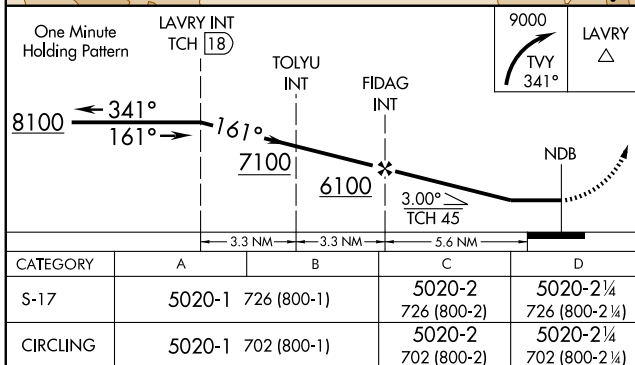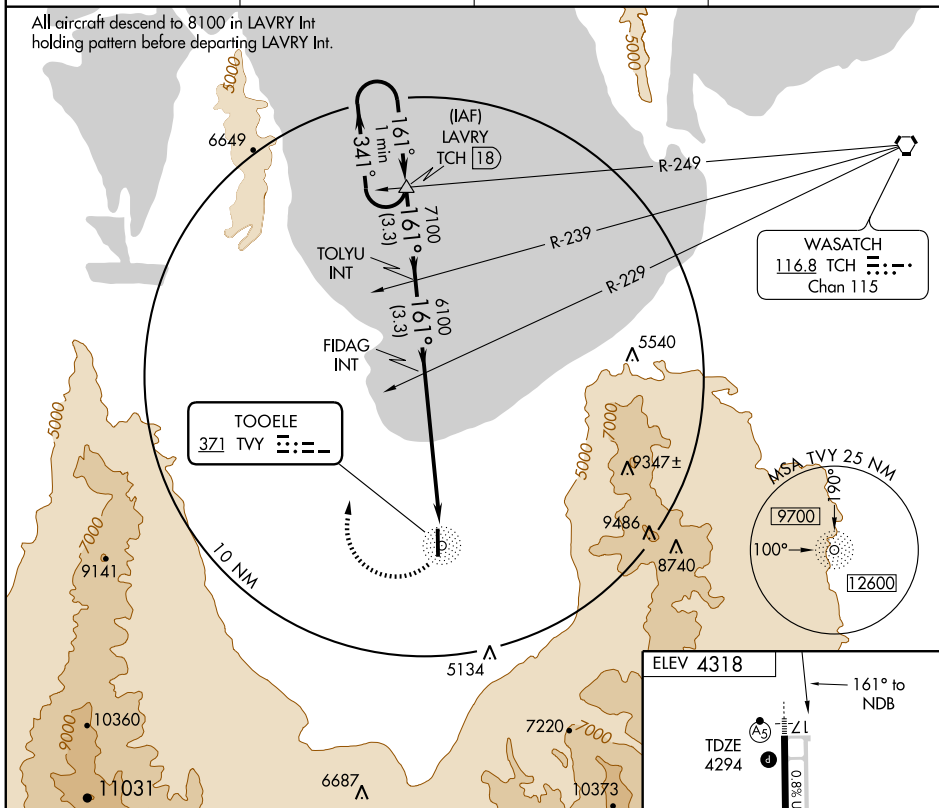



MIRL Rwy 17-35 **0**
REIL Rws 17 and 35 **0**

RNAV (GPS) RWY 17


TOOELE / BOLINDER FIELD-TOOELE VALLEY (TVY)

MISSED APPROACH:
Climbing right turn to
9000 direct LICIN
and hold, continue
climb-in-hold to 9000.

UNICOM
123.0 (CTAF) **L**

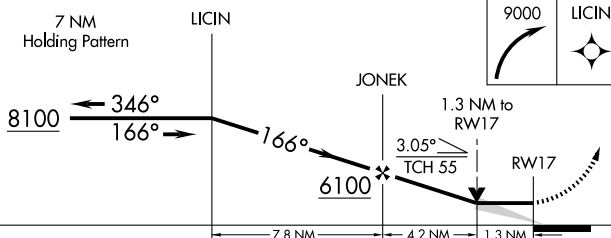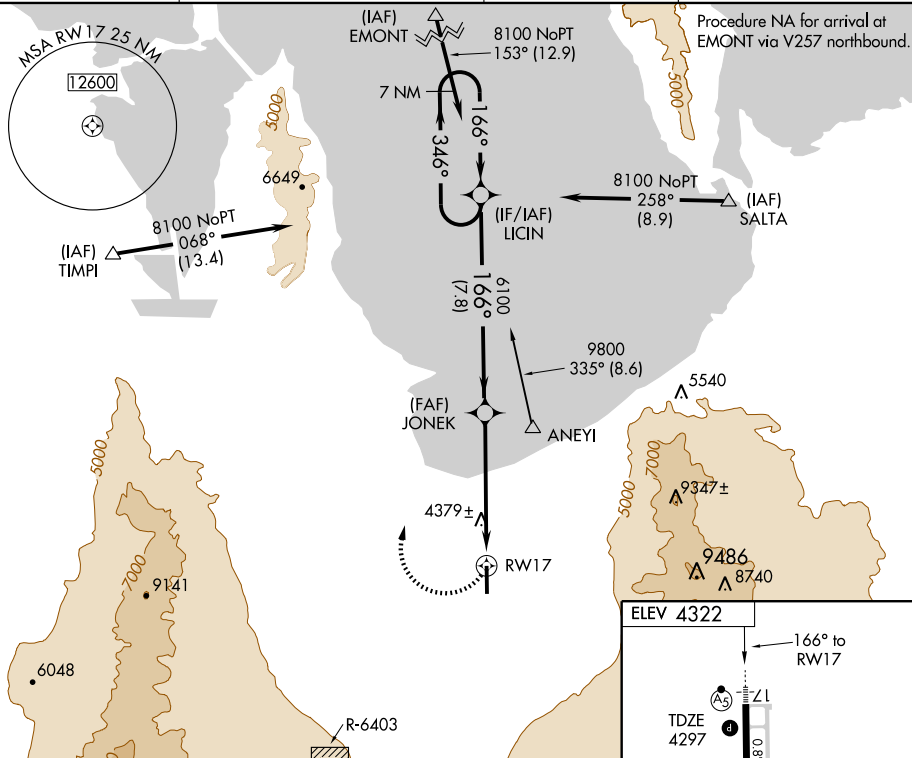


CATEGORY	A	B	C	D
RNAV MDA	4740-3/4 443 (500-3/4)			4740-1 443 (500-1)
CIRCLING	4820-1 498 (500-1)	4840-1 518 (600-1)	4860-1½ 538 (600-1½)	4940-2 618 (700-2)

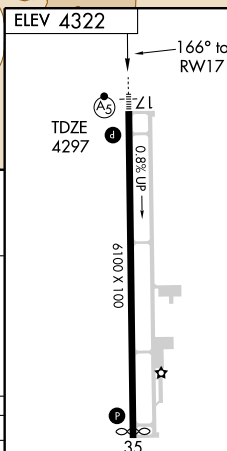

MIRL Rwy 17-35 **L**
REIL Rwy 17 and 35 **L**

SALT LAKE CITY ATIS
124.75 127.625
AWOS-3 119.725
SALT LAKE CITY DEP CON
135.5 316.15
CTAF 123.0

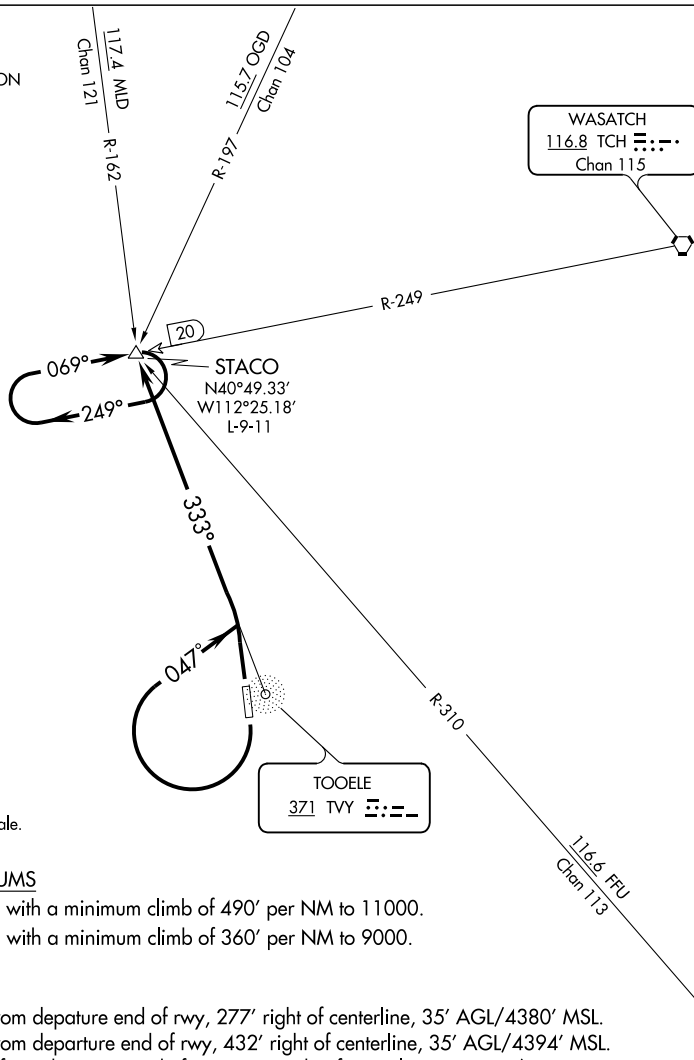

NOTE: Chart not to scale.

TAKE-OFF MINIMUMS

Rwy 17: Standard with a minimum climb of 490' per NM to 11000.

Rwy 35: Standard with a minimum climb of 360' per NM to 9000.

NOTE: Rwy 17:

Tree 794' from departure end of rwy, 277' right of centerline, 35' AGL/4380' MSL.

Tree 967' from departure end of rwy, 432' right of centerline, 35' AGL/4394' MSL.

Tree 1023' from departure end of rwy, 313' right of centerline, 35' AGL/4395' MSL.



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 17: Climbing right turn to 11000 via heading 047° and TVY NDB bearing 333° to STACO INT and hold.

TAKE-OFF RUNWAY 35: Climb to 9000 via TVY NDB bearing 333° to STACO INT and hold.

All aircraft expect further clearance to filed route and altitude ten minutes after departure.

▽



▲

NA

GPS or RNP-0.3 required. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climbing right turn to 10000 direct OHAPE WP and hold.

ASOS 135.175	CEDAR CITY RADIO 122.35	UNICOM 122.7 (CTAF) 0
-----------------	----------------------------	--------------------------

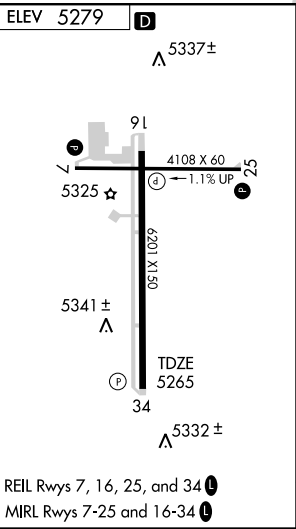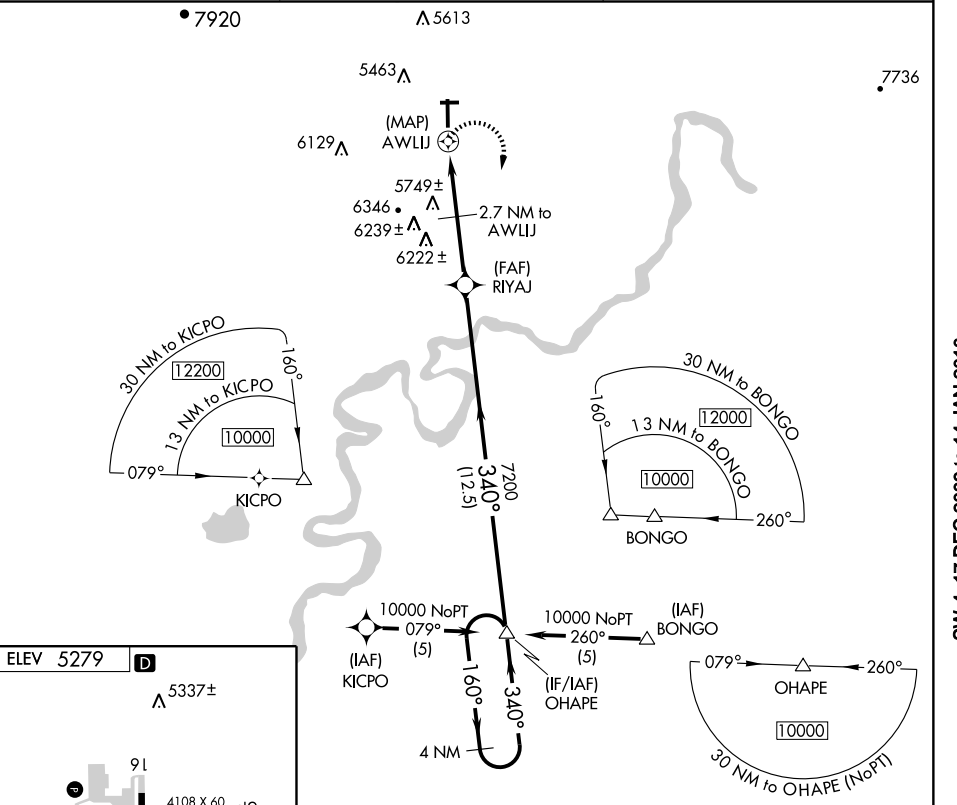

CATEGORY	A	B	C	D
LNAV MDA	5980-1	715 (800-1)	5980-2 715 (800-2)	5980-2 ¼ 715 (800-2 ¼)
CIRCLING	5980-1	701 (800-1)	5980-2 701 (800-2)	5980-2 ¼ 701 (800-2 ¼)

VERNAL, UTAH

AL-792 (FAA)

VOR RWY 34

VERNAL RGNL (VEL)





VOR/DME VEL 108.2 Chan 19	APP CRS 331°	Rwy Idg TDZE Apt Elev 6201 5265 5279
---	------------------------	--

MISSED APPROACH: Climbing right turn to 8000 direct
VEL VOR/DME and hold.

ASOS
135.175

CEDAR CITY RADIO
122.35

UNICOM
122.7 (CTAF) 1

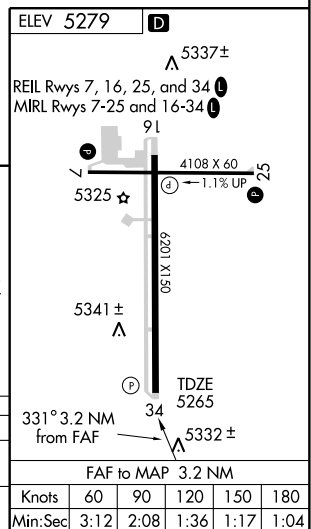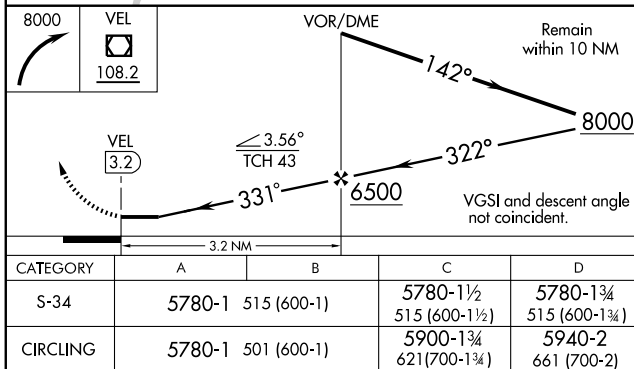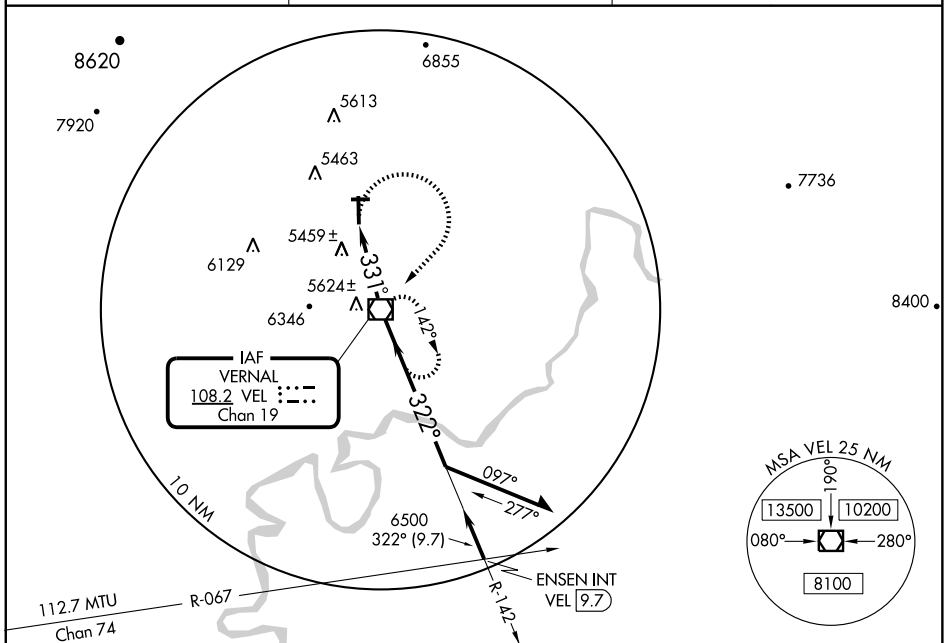


SW-4. 17 DEC 2009 to 14 JAN 2010

BONNEVILLE ONE DEPARTURE (RNAV)

CEDAR CITY RADIO
122.1R
UNICOM 122.8 (CTAF)
AWOS-3 135.075

NOTE: 1. GPS required.
2. RNAV 1.

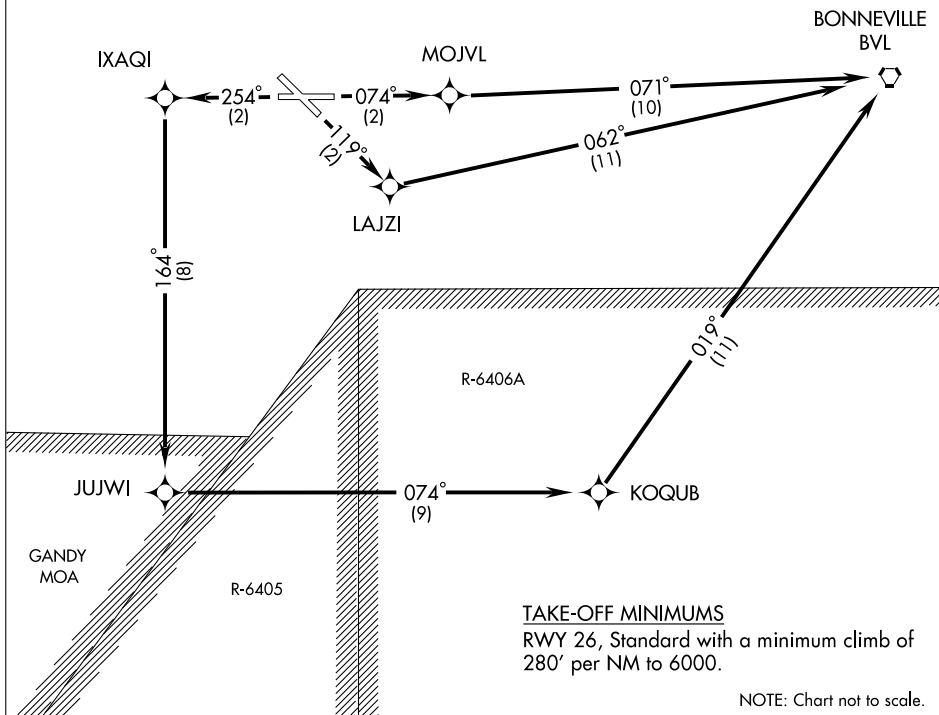

SW-4, 17 DEC 2009 to 14 JAN 2010



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 8: Climb to 9000 via course 074° to MOJV L WP, then via course 071° to BVL VORTAC.

TAKE-OFF RUNWAY 12: Climb to 9000 via course 119° to LAJZI WP, then via course 062° to BVL VORTAC.

TAKE-OFF RUNWAY 26: Climb to 9000 via course 254° to IXAQI WP, then via course 164° to JUJWI WP, then via course 074° to KOQUB WP, then via course 019° to BVL VORTAC.

TAKE-OFF RUNWAY 30: Not authorized.

APP CRS	Rwy Idg	N/A
081°	TDZE	N/A
	Apt Elev	4235




RNAV (GPS)-A
WENDOVER (ENV)

NA

Circling not authorized north of Rwy 8-26.
GPS or RNP-0.3 required. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 9000 direct BVL VORTAC and hold.

AWOS-3 135.075	CEDAR CITY RADIO 122.1R	UNICOM 122.8 (CTAF) 0
-------------------	----------------------------	---------------------------------

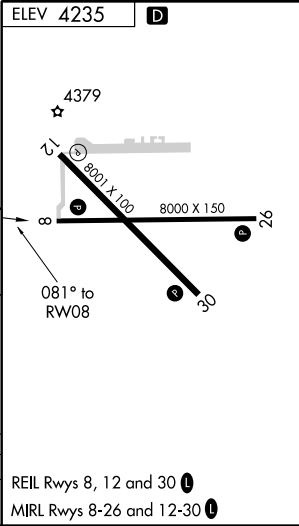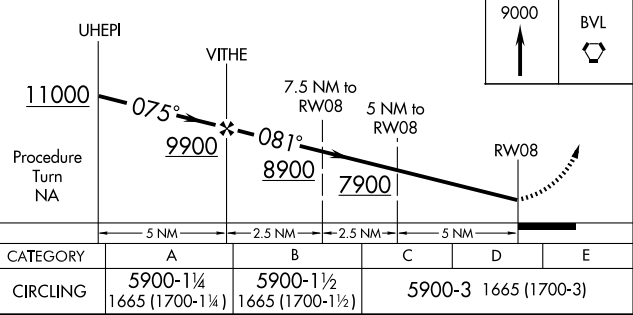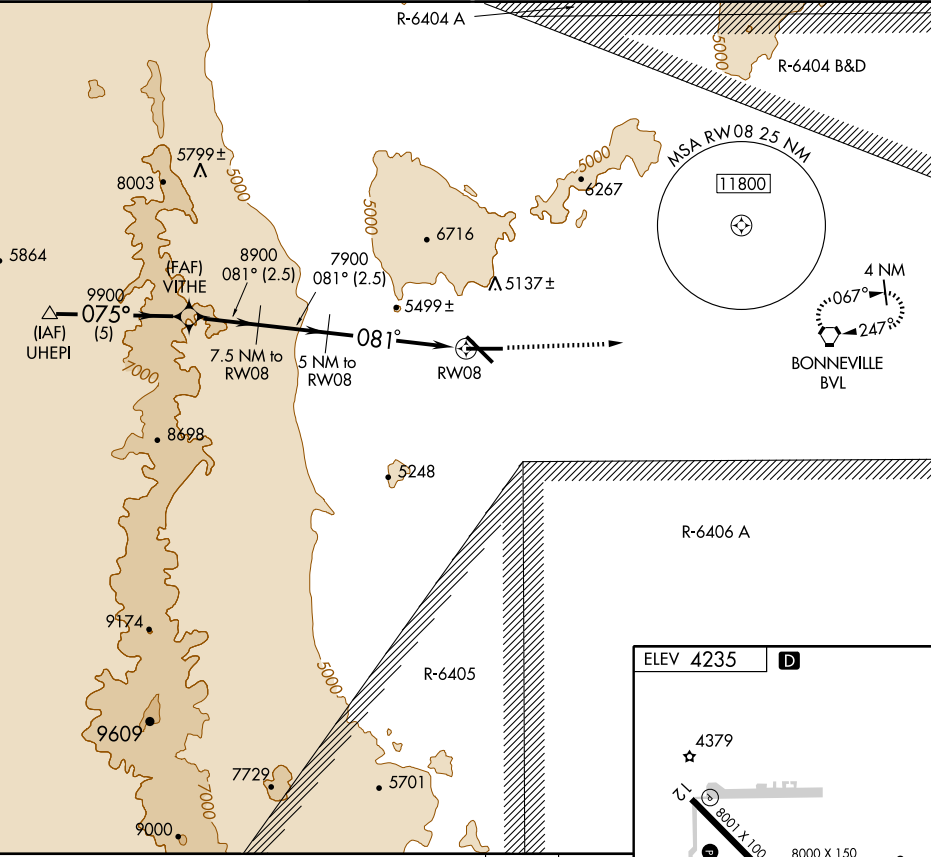

RNAV (GPS) RWY 26

WENDOVER (ENV)




APP CRS	Rwy Idg	8000
251°	TDZE	4224
	Apt Elev	4235

⚠ Circling not authorized north of Rwy 8-26.

⚠ GPS or RNP-0.3 required. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climbing left turn to 9000 direct OPNUZ WP and hold.

AWOS-3 135.075	CEDAR CITY RADIO 122.1R	UNICOM 122.8 (CTAF) Ⓛ
-------------------	----------------------------	---------------------------------

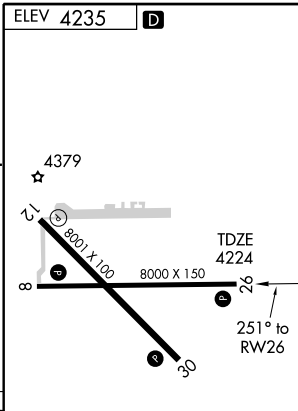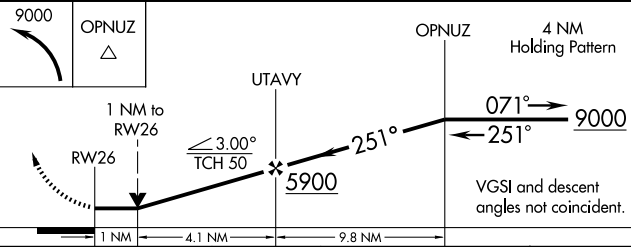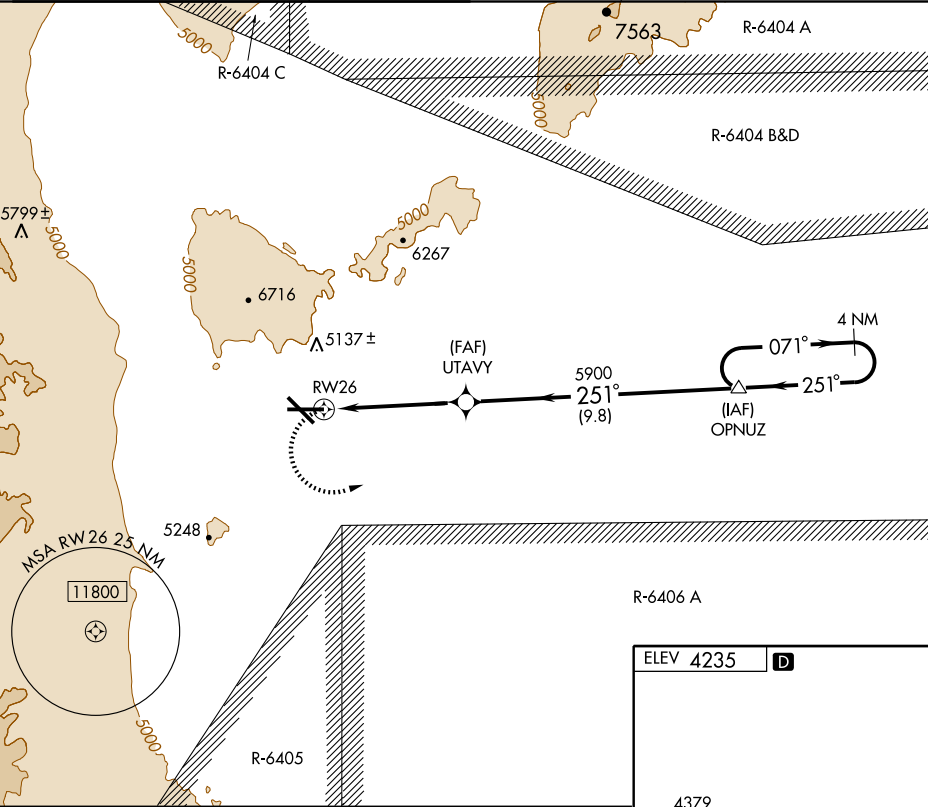

CATEGORY	A	B	C	D	E
RNAV MDA	4580-1	356 (400-1)		4580-1¼ 356 (400-1¼)	4660-1½ 436 (500-1½)
CIRCLING	4640-1 405 (500-1)	4700-1 465 (500-1)	4700-1½ 465 (500-1½)	4800-2 565 (600-2)	5000-2¾ 765 (800-2¾)

REIL Rwy 8, 12 and 30 **Ⓛ**
MRL Rwy 8-26 and 12-30 **Ⓛ**

WENDOVER, UTAH



AL-445 (FAA)

VORTAC BVL 112.3 Chan 70	APP CRS 071°	Rwy Idg TDZE Apt Elev N/A N/A 4235
--	------------------------	--

VOR/DME-B
WENDOVER (ENV)

▼
▲ Circling not authorized north of Rwy 8-26. MISSED APPROACH: Climb to 9000 direct BVL VORTAC and hold.

AWOS-3 135.075	CEDAR CITY RADIO 122.1R	UNICOM 122.8 (CTAF) ①
--------------------------	-----------------------------------	--

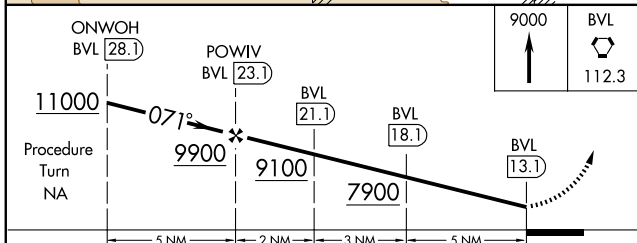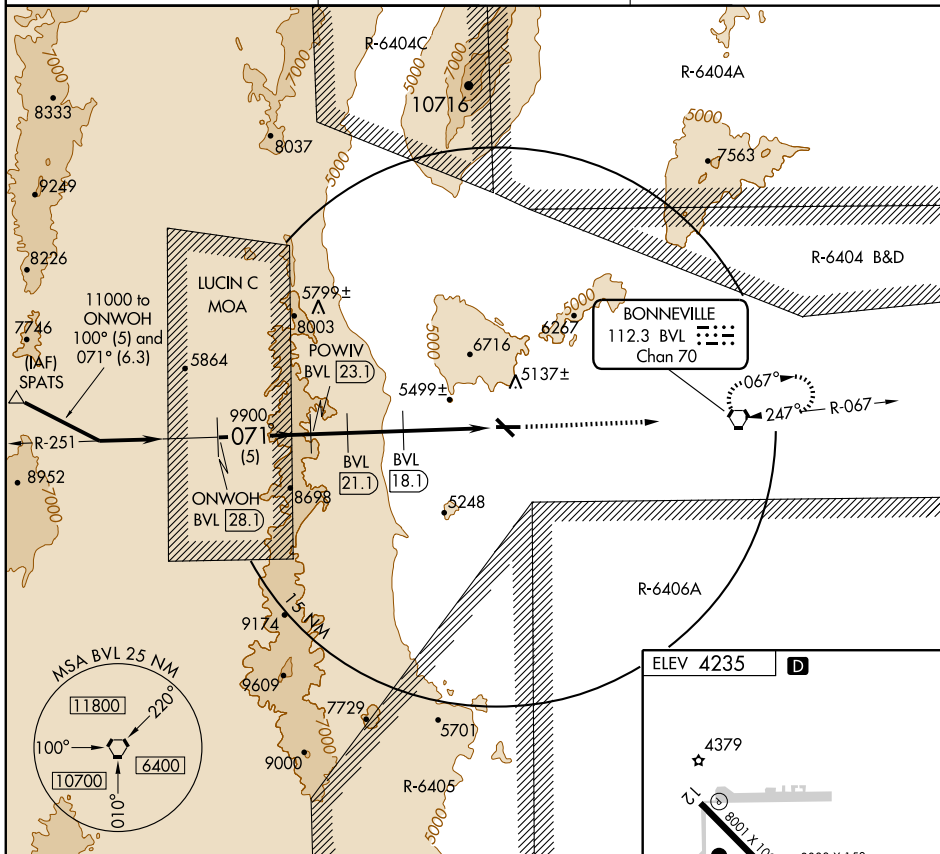

CATEGORY	A	B	C	D	E
CIRCLING	5900-1¼ 1665 (1700-1¼)	5900-1½ 1665 (1700-1½)	5900-3 1665 (1700-3)		

REIL Rws 8, 12 and 30 **①**
MIRL Rws 8-26 and 12-30 **①**

SW-4, 17 DEC 2009 to 14 JAN 2010

AL-445 (FAA)

VORTAC BVL 112.3 Chan 70	APP CRS 251°	Rwy Idg 8000 TDZE 4224 Apt Elev 4235
--	------------------------	---




VOR/DME or TACAN RWY 26
WENDOVER (ENV)

T Circling not authorized north of Rwy 8-26.

MISSED APPROACH: Climbing left turn to 9000 direct BVL VORTAC and hold. (TACAN aircraft continue via BVL R-067 to BAGGI INT and hold NE, right turns, 247° inbound.)

AWOS-3
135.075

CEDAR CITY RADIO
122.1R

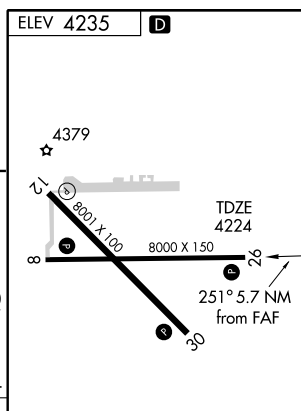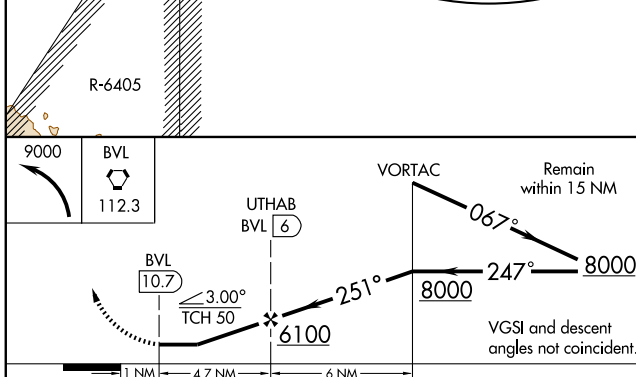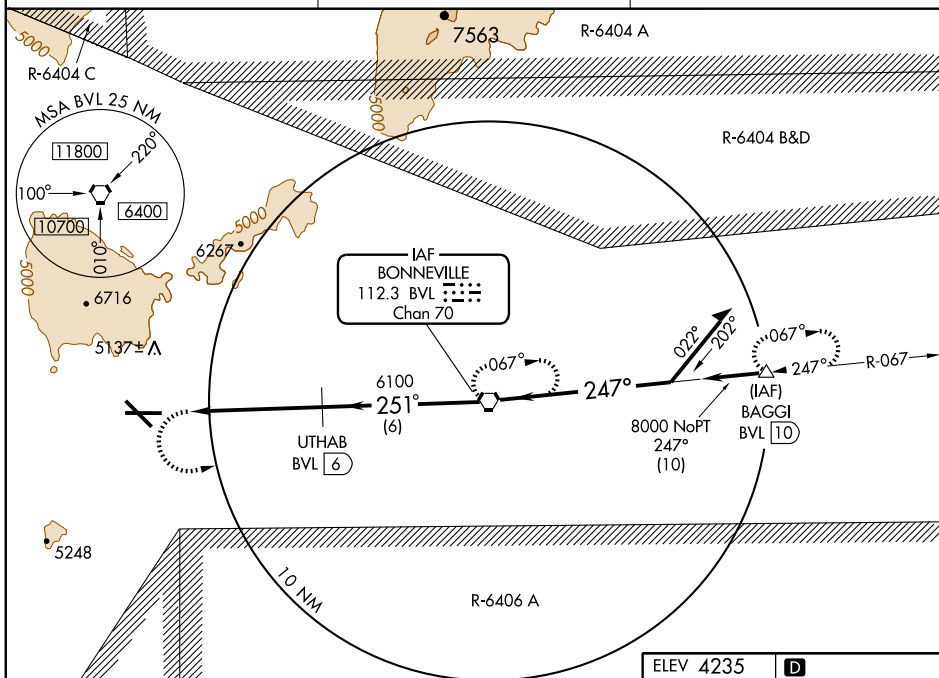UNICOM
122.8 (CTAF) **L**

CATEGORY	A	B	C	D	E
S-26	4580-1¼ 356 (400-1¼)			4620-1¼ 396 (400-1¼)	4960-2½ 736 (800-2½)
CIRCLING	4640-1¼ 405 (500-1¼)	4700-1¼ 465 (500-1¼)	4700-1½ 465 (500-1½)	4800-2 565 (600-2)	5000-2¾ 765 (800-2¾)

REIL Rwy 8, 12 and 30 **L**MIRL Rwy 8-26 and 12-30 **L**

SW-4. 17 DEC 2009 to 14 JAN 2010